



BizLine

www.bizline.com

EQUIPMENT
AND COMMODITIES
FOR PROFESSIONALS

CATALOGUE 2019 - 2020

WHO ARE WE?

Specialist in essential commodities and equipment, BizLine markets its products through the Rexel group, a leader in the professional distribution of electrical products and services.



MORE THAN
500
TARGETED
REFERENCES

ACCORDING TO
YOUR NEEDS

BIZLINE IN THE WORLD

Bizline is present in more
1,200 branches in the world:

Europe : France, Germany, Luxembourg, Netherlands, Switzerland, Sweden, Finland, Italy, Spain, Portugal.

Oceania: Australia and New Zealand.

MORE THAN
1,200
BRANCHES
IN THE WORLD



CABLING AND
INSTALLATION
ACCESSORIES



HARDWARE



TAPES



CHEMICALS



HAND
TOOLS



POWER TOOLS
ACCESSORIES



SITE AND
WORKSHOP
EQUIPMENT



PROTECTION
SAFETY
AND SIGN



PLUMBING

**GIVING YOU
ACCURATE
INFORMATION
ON A DAILY BASIS!**

CUSTOMER SERVICE



**ASK OUR
SALES
TEAM**



In one click, access technical information, product tips and BizLine news.

www.bizline.com



OUR GUARANTEE

Other than consumables, our products come with a guarantee that begins from the invoicing date.

The guarantee time varies according to the product. This guarantee applies to any manufacturing defect under normal conditions of use, maintenance and storage.



BIZLINE COMMITMENTS!

PROVIDE OUR CLIENTS WITH THE **BEST QUALITY & SAFETY POSSIBLE!**

Before any product launch, we test it for quality and conformity in our own COFRAC-approved laboratory.

Being COFRAC-approved means that our laboratory is a lever to increase the confidence of our customers, thus they can trust the quality of the products which are tested with standardized and internationally approved test methods.

« This internal test laboratory ensures all Bizline products comply with current national and international standards enforced in our different markets. »

Alain Nouma,
Bizline Technical,
Quality and Laboratory Manager



CERTIFICATION N°1-2279
SCOPE AVAILABLE ON
WWW.COFRAC.FR

OTHER TYPES OF TESTS



Hardness



Dielectric test



Impact



Climatic resistance



Resistance to heat



Isolation resistance



Falls

etc.



Glow wire test



Climatic test



Traction test



Normal operation and breaking capacity

EXAMPLES OF TESTS PERFORMED IN OUR LABORATORY

TECHNICAL INFORMATION

THE MAIN MARKS OF CONFORMITY




The granting and the use of the marks of conformity (NF, VDE, etc.) is a voluntary approach, but it guarantees to the consumer that the quality of the product, and in particular its conformity to standards, is regularly checked by an independent laboratory and that its production is subject to a quality assurance procedure.

Mark of conformity	Certification bodies	Countries
	LCIE	FRANCE
	VDE	GERMANY
	SEMKO	SWEDEN
	IMQ	ITALY
	UL	USA
	UL	CANADA / USA
	Canadian Standards Association	CANADA

IP CODES: INDEX OF PROTECTION

Levels	1st Number Ingress of solid foreign objects	2nd Number Ingress of water
0	Not protected	Not protected
1	Protected against solid objects larger than 50 mm IP 1x	Protected against vertically falling drops of water IP x1
2	Protected against solid objects larger than 12 mm IP 2x	Protected against falling water at a maximum angle of 15° IP x2
3	Protected against solid objects larger than 2.5 mm IP 3x	Protected against falling water at a maximum angle of 60° IP x3
4	Protected against solid objects larger than 1 mm IP 4x	Protected against water splashes IP x4
5	Protected against dust IP 5x	Protected against water jets IP x5
6	Dust-tight IP 6x	Protected against waves at sea IP x6
7		Protected against the effects of temporary immersion IP x7
8		Protected against the effects of prolonged immersion IP x8

PROTECTION AGAINST ELECTRIC SHOCKS

Three classes of insulation are defined:		
Class I	Class II	Class III
Functional insulation with earthing of accessible metal parts	Functional insulation completed by additional or reinforced insulation, no earthing	Very low voltage supply
Symbol 	Symbol 	Symbol 

CODES OF PROTECTION AGAINST IMPACTS

Codes of protection against impacts										
	IP xx1/AG1	IP xx5/AG2	IP xx7/AG3	IP xx9/AG4						
Weight	150 g	500 g	1.5 kg	5 kg						
Height of fall	15 cm	40 cm	40 cm	40 cm						
Impact energy (Joules)	0.225 joule	2 joules	6 joules	20 joules						
Codes of protection against impacts										
	IK 01	IK 02	IK 03	IK 04	IK 05	IK 06	IK 07	IK 08	IK 09	IK 10
Impact energy (Joules)	0.15j	0.23j	0.35j	0.5j	0.7j	1j	2j	5j	10j	20j

PICTOGRAMS



COMPLIANCE WITH REGULATIONS

All normative and safety information (SDS, test reports, etc.) are indicated by this pictogram in our catalogue.

CABLES AND WIRES



RIGID



MULTIPLE STRAND CABLE



SEMI-RIGID



SUITED FOR ALUMINIUM AND COPPER



SOFT



TIPS



SLOTTED



PHILLIPS® (PH)



POZIDRIV® (PZ)



TORX®



RESISTOR®



PZ/SLOTTED



HEX



SQUARE DRIVE



HOLLOW HEX BIT HOLDER

MATERIALS



METAL



SOLID MATERIALS



HOLLOW MATERIALS



CONCRETE



CONCRETE REINFORCED CONCRETE



CELLULAR CONCRETE



WOOD



PLASTERBOARD



POLYSTYRENE



STAINLESS STEEL



ALUMINIUM/ COPPER



HOLLOW BRICK



SOLID BRICK



STONE



GLASS



GRANIT



MARBLE



STONEWARE

Electriciens sans frontières, an international solidarity NGO,

fights against the unequal access to electricity and water throughout the world. With the support of its 1,300 volunteers and in partnership with local stakeholders, it promotes economic and human development by using renewable energies. By bringing energy to areas where it is absent, it helps improve the living conditions of the poorest populations.

Currently, **Electriciens sans frontières** intervenes in over 30 countries and has **124 ongoing projects**.

*figure at 31/12/2017



MORE THAN
120
ONGOING
PROJECTS
IN 30 COUNTRIES



BizLine is a partner of this NGO and has supported it since 2012.

In 2018, BizLine, in partnership with **Electriciens sans frontières** and the local association "Solidarité Sénégal", supported the project to provide electricity to two schools in the Casamance region in Senegal: the Lycée de Ziguinchor and the Collège de Coubalan, totalling together over 4,600 pupils. A true citizen cooperation occurred onsite between the French students, the Senegalese apprentices and the volunteers of Electriciens sans frontières. Today, we count 102 classrooms equipped with electricity, through the installation of 3,400 m of underground cables, 6,800 m of internal cables and 30 electrical whiteboards.

Join us and support Electriciens sans frontières

Like BizLine, contribute to helping electricity deprived populations in developing countries. To take action and help us in our projects you can donate here

www.electriciens-sans-frontieres.org

LEVER PUSH-IN WIRE CONNECTORS

BIZ300512 -315



P. 125

P. 21



CABLING AND
INSTALLATION
ACCESSORIES

SQUALE CONNECTION KITS

BIZ710294



P. 25

P. 106

NEW



HANDLING GLOVES EASY GRIP

BIZ730153




PROTECTION
SAFETY AND SIGN

P. 46

FOLDING DRUM ROLLER

BIZ700275



SITE AND
WORKSHOP
EQUIPMENT



SELF-DRILLING PLASTER NYLON PLUGS

BIZ780207-208

HARDWARE

HIGH PERFORMANCE VINYL TAPE

BIZ225033



P. 54

**LA COSTABELLE
TOOL BAG**

BIZ700229



P. 93

**TAPE
MEASURES**

BIZ790062



P. 118

**SQUARE
TERMINAL
CRIMPING PLIERS**

BIZ790011



P. 88

**LED POCKET
INSPECTION
LIGHT**

BIZ620260



**MAINTENANCE
TOOL BOX**

BIZ790529

P. 77

HAND TOOLS

P. 95



**MARKING
PAINT**

BIZ750170-174

P. 65

**PICA DRY
GRAPHITE LEAD
PENCIL**

BIZ790214



P. 84



CABLING AND INSTALLATION ACCESSORIES

P. 10



Fixings for cables
P. 12



Fixings for tubes and conduits
P. 18



Connection systems
P. 20



HARDWARE

P. 38



Fasteners
P. 40



Bolts and nuts
P. 43



Plugs
P. 44



TAPES

P. 52




Insulating tapes
P. 54



Multi-purpose tapes
P. 54



Tapes for specific applications
P. 55



CHEMICALS

P. 60



Chemical fixings
P. 62



Maintenance aerosols
P. 65



HAND TOOLS

P. 66



Pliers
P. 68



Screwdrivers
P. 71



Screwdrivers sets
P. 74



Cable cutters
P. 74



Cable strippers
P. 75



Crimping pliers
P. 77



POWER TOOLS AND CONSUMABLES

P. 98



Heat gun
P. 100



Drill bits
P. 101




Hole saws accessories
P. 103



SITE AND WORKSHOP EQUIPMENT

P. 104



Dispenser reels
P. 106



Draw-wires and accessories
P. 107



Cable access rod and accessories
P. 114



Multi-way extension leads
P. 115



PROTECTION, SAFETY AND SIGNS

P. 120



Gloves
P. 122



Signalling
P. 127



PLUMBING

P. 130



Plumbing accessories
P. 132



Bendings
P. 133



Connections sealing
P. 22



Industrial cabling
components
P. 26



Device clamps
P. 37



Supporting systems
P. 48



Wrenches
P. 79



Cutting, sawing
and filing tools
P. 81



Solder tools
P. 84



Marking tools
P. 84



Measuring tools
P. 88



Electrical inspection
and testing devices
P. 89



Tool storage
P. 90



Extension cords
P. 115



Electrical connection
P. 117



Site lighting
P. 118




Cleaning equipment
P. 118



Stowage
P. 119



Index by au part #: **P. 134 to P. 137**
Index by bizline number: **P. 138 to P. 141**
Alphabetical index: **P. 141 to P. 144**



CABLING AND INSTALLATION ACCESSORIES

FIXINGS FOR CABLES	12
FIXINGS FOR TUBES AND CONDUITS	18
CONNECTION SYSTEMS	20
CONNECTIONS SEALING	22
INDUSTRIAL CABLING COMPONENTS	26
DEVICE CLAMPS	37

FIXINGS FOR CABLES

CABLE TIES AND ACCESSORIES

The various types of polyamide:

There are many sorts of polyamide, the best known being PA 6.6. These materials have excellent chemical and mechanical resistance properties, which differ depending on the type: PA 6.6, PA 11, PA 12, etc. Some polyamides like PA 6.6 are sensitive to temperature and to humidity levels, they may take up or lose water, thus modifying their properties. This effect is known as "water regain".



HIGH PERFORMANCE
 DURABILITY

 UV resistant
 Halogen-free
 High abrasion resistance
 Working temperature:
-40 °C à +85 °C





Fast, secure fastening and binding.
Durable fixing of cables, conduits etc.

PA 6.6 CABLE TIES

Technical details:

- Material: polyamide 6.6.
- Polyamide 6.6 is semi-crystalline industrial thermoplastic with high mechanical strength.
- Operating temperature: -40 to +85 °C.
- Installation temperature: -10 to +60 °C.

Advice:

For easier fitting of cable ties between 3.6 and 9.5 mm wide, use tool BIZ 700 010.



- High abrasion resistance.
- Excellent resistance to low temperatures and temperature changes.
- Halogen free.
- Resealable bags!



CABLE TIE PLIERS
BIZ 700 010
See page 70

AU Part #	BIZ-reference	Colour	Length (mm)	Width (mm)	Maximum clamping Ø (mm)	Traction strength (N)	Thickness (mm)	Quantity per bag
BIZCTN10025100	BIZ 303 002	Natural	100	2,5	22	80	1,12	100
BIZCTN15036100	BIZ 303 006	Natural	150	3,6	36	180	1,28	100
BIZCTN20048100	BIZ 303 012	Natural	200	4,6	52	220	1,53	100
BIZCTN200481000	BIZ 301 012	Natural	200	4,6	52	220	1,53	1000
BIZCTN25048100	BIZ 303 038	Natural	250	4,8	68	220	1,53	100
BIZCTN250481000	BIZ 301 038	Natural	250	4,8	68	220	1,53	1000
BIZCTN30048100	BIZ 303 016	Natural	300	4,8	83	220	1,5	100



FIXINGS FOR CABLES

CABLE TIES AND ACCESSORIES

ANTI-UV PA 6.6 CABLE TIES



Ideal for your photovoltaic installations

- UV-resistant.
- Halogen-free.
- Resealable bags!



Application(s):

For outdoor use, photovoltaic installations, etc.

Technical details:

- Polyamide 6.6 with additive which guarantees resistance to UV radiation.
- Operating temperature: -40 to +85 °C.
- Installation temperature: 0 to +60 °C.

Advice:

For easier fitting of cable ties between 3.6 and 9.5 mm wide, use tool BIZ 700 010.




**CABLE TIE PLIERS
BIZ 700 010**
See page 70

AU Part #	BIZ-reference	Colour	Length (mm)	Width (mm)	Thickness (mm)	Maximum clamping Ø (mm)	Traction strength (N)	Quantity per bag
BIZCTB10025100	BIZ 380 050	Black	100	2.5	1.05	22	80	100
BIZCTB100251000	BIZ 380 060	Black	100	2.5	1.05	22	80	1000
BIZCTB15036100	BIZ 380 051	Black	150	3.6	1.35	36	180	100
BIZCTB150361000	BIZ 380 061	Black	150	3.6	1.35	36	180	1000
BIZCTB20048100	BIZ 380 052	Black	200	4.8	1.4	52	220	100
BIZCTB200481000	BIZ 380 062	Black	200	4.8	1.5	52	220	1000
BIZCTBHD20076100	BIZ 380 070	Black	200	7.6	1.5	52	550	100
BIZCTB25048100	BIZ 380 053	Black	250	4.8	1.5	68	220	100
BIZCTB250481000	BIZ 380 063	Black	250	4.8	1.5	68	220	1000
BIZCTB30048100	BIZ 380 054	Black	300	4.8	1.5	83	220	100
BIZCTB300481000	BIZ 380 064	Black	300	4.8	1.5	83	220	1000
BIZCTB37048100	BIZ 380 055	Black	370	4.8	1.5	105	220	100
BIZCTBHD38076100	BIZ 380 071	Black	380	7.6	1.8	105	450	100
BIZCTB43048100	BIZ 380 056	Black	430	4.8	1.5	125	220	100
BIZCTBHD550825	BIZ 380 072	Black	550	8	2	160	600	25
BIZCTBHD710925	BIZ 380 073	Black	710	9	2	209	800	25

SELF-GRIPPING CABLE TIES **NEW**



Application(s):

For fixing and organizing data cables (UTP, STP, Fibre, etc.).

Designed to clamp cables without impacting the data transmission rate likely to occur with typical cable ties.

Technical details:

- Polyamide 6.6.

- Easy fitting.
- Reusable.



AU Part #	BIZ-reference	Type	Length (mm)	Length (m)	Width (mm)	Quantity per bag
BIZ300110	BIZ 300 110	Cable ties	210	-	16	20
BIZ300111	BIZ 300 111	Roll	-	10	20	1

FIXINGS FOR CABLES

Stainless steel barb-lock Nylon cable ties

The most **SECURE** and **RESISTANT** cable tie of our range!



- For indoor and outdoor use. UV resistant.
- Tested to flammability standard UL94-V2.
- Halogen free.
- Homologation under standard UL62275.
- Stainless steel barb provides consistent performance and reliability. They are not sensitive to vibrations. The high tensile strength compared to standard plastic tab cable ties also provides increased security for the end-user.
- Low thread force. Can be tightened by hand. No mounting tools required.
- Weather and corrosion resistant (humidity, heat, cold, etc...). Operating temperature goes from -40 °C to +85 °C.



FIXINGS FOR CABLES

CABLE TIES AND ACCESSORIES

STAINLESS STEEL BARB LOCKING PA 6.6 CABLE TIES **NEW**



Application(s):


These cable ties are designed for interior and exterior fixing applications. Perfect for environments where vibration is present, the metal barb ensures regular high performance levels and long-term reliability.

- No resistance on tightening.
- High level of abrasion resistance.
- Halogen-free.
- UV-resistant.



Technical details:

- Pull-tie material: polyamide 6.6.
- Raw material flammability: UL94V-2.
- Barb material: stainless steel 304.
- Installation temperature: -40 to +60 °C.
- Operating temperature: -40 to +85 °C.



AU Part #	BIZ-reference	Colour	Length (mm)	Width (mm)	Thickness (mm)	Maximum clamping Ø (mm)	Traction strength (N)	Packaging per box
BIZ304048	BIZ 304 048	Black	155	3,6	1,2	35	178	100
BIZ304050	BIZ 304 050	Black	284	3,6	1,2	80	178	100
BIZ304051	BIZ 304 051	Black	186	4,8	1,5	45	220	100
BIZ304052	BIZ 304 052	Black	295	4,8	1,5	81	220	100
BIZ304053	BIZ 304 053	Black	361	4,8	1,5	100	220	100
BIZ304055	BIZ 304 055	Black	780	7	1,6	230	500	50

STAINLESS STEEL CABLE TIES



Application(s):

Recommended for use in corrosive environments (food, chemical and dairy industry, hospitals, etc.).

- May be tightened by hand.
- Ball locking system.




Technical details:

- Class 304 stainless steel.
- Salt-spray resistance: no red rust after 48 hrs.
- Thickness: 0,26 mm.
- Temperature resistance: -80 to +538 °C.
- Halogen-free.


Advice:

For easier fitting, use pliers BIZ 790 010.





STAINLESS STEEL CLAMP PLIERS
BIZ 790 010
See page 70



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Maximum clamping Ø (mm)	Traction strength (N)	Quantity per bag
BIZCTSS200	BIZ 290 021	200	4,6	51	450	100
BIZCTSS360	BIZ 290 022	360	4,6	102	450	100
BIZCTSS360HD	BIZ 290 026	360	7,9	102	1140	50
BIZ300120	BIZ 300 120	200	4,6	51	540	100
BIZ300121	BIZ 300 121	350	4,6	102	540	100
BIZ300123	BIZ 300 123	350	7,9	102	1200	50

FIXINGS FOR CABLES

CABLE TIES AND ACCESSORIES

CABLE TIE MOUNTS


Application(s):

Tie mounts designed to support light weight wire bundles. Must be applied on clean and smooth surfaces.

Technical details:

- Material: polyamide 6.6.
 - Color: natural.
- > 94V-2

• A mounting hole is included to use screws to fix heavy loads wire bundles.



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Packaging
BIZCTM19	BIZ 303 021	19	19	100
BIZCTM26	BIZ 303 019	26	26	100

WALL PLUG MOUNTING BASES


Application(s):

Quick fixing of cables, tubes and conduits using cable ties up to 9 mm wide.

Technical details:

- Material: polyamide 6.6.
- Color: black.

AU Part #	BIZ-reference	Drilling Ø (mm)	Length (mm)	Width (mm)	Height (mm)	Packaging per box
BIZCTA69	BIZ 303 085	6	31	12,5	12	100

CONTINUOUS MOVABLE BUSHINGS


Application(s):

Provide protection for cables and wires against damages from sharp panel edges and abrasion on panel holes. Snap into place to fit irregular and or circular shapes.

Technical details:

- Material: high quality polyethylene.
- Color: natural.

• Flexible.



AU Part #	BIZ-reference	Length (m)	Minimum thickness metal panel (mm)	Maximum thickness metal panel (mm)
BIZCMB1.6	BIZ 290 018	10	1	1,6
BIZCMB2	BIZ 290 019	10	1,6	2,4



FIXINGS FOR CABLES

CABLE TIES AND ACCESSORIES

PA 6.6 SNAP BUSHINGS



Application(s):

Protect the electrical cables, wires and ropes through metal holes. Suitable for metal pannel up to 3.2 mm thickness.

Technical details:

- Material: nylon 6.6, 94V-2.
- Color: black.

AU Part #	BIZ-reference	Mounting hole Ø (mm)	Inside Ø (mm)	Outside Ø (mm)	Packaging type	Quantity
BIZNSB127	BIZ 290 001	12,7	8	15	Bag	30
BIZNSB159	BIZ 290 002	15,9	12,7	18,6	Bag	23
BIZNSB191	BIZ 290 003	19,1	14,3	21,7	Bag	20
BIZNSB206	BIZ 290 004	20,6	15,9	22,4	Bag	20
BIZNSB254	BIZ 290 005	25,4	19,5	28,5	Bag	18
BIZNSB318	BIZ 290 006	31,8	23,8	34,6	Bag	13
BIZNSB381	BIZ 290 007	38,1	29	42,1	Bag	10
BIZNSB508	BIZ 290 008	50,8	41,6	54,6	Bag	8

CABLE CLIPS

PA 6.6 CABLE CLAMPS



Easy and economic way to hold cables, tubes and components in domestic appliances and electric apparatus.

Technical details:

- Material: polyamide 6.6, 94V-2.
- Radiused interior edges to protect the cable insulation.
- Color: natural.

AU Part #	BIZ-reference	Color	Minimum clamping Ø (mm)	Packaging type	Quantity
BIZCC32	BIZ 302 060	Natural	3,1	Plastic bag	100
BIZCC48	BIZ 302 061	Natural	5	Plastic bag	100
BIZCC64	BIZ 302 062	Natural	6,4	Plastic bag	100
BIZCC79	BIZ 302 063	Natural	7,9	Plastic bag	100
BIZCC95	BIZ 302 064	Natural	9,5	Plastic bag	100

ROUND CABLE CLIPS



Application(s):

Used to fasten cables and conduits into solid materials such as concrete, masonry and wood.

Technical details:

- Material: polyethylene.
- Steel nail inserted.

AU Part #	BIZ-reference	Color	Nail length (mm)	Cable Ø (mm)	Cable type	Packaging type	Quantity
BIZ310261	BIZ 310 261	White	20	4-7	Standard	Jar	100
BIZ310262	BIZ 310 262	Black	20	4-7	Standard	Jar	100
BIZ310263	BIZ 310 263	White	25	8-12	Standard	Jar	100
BIZ310264	BIZ 310 264	White	35	12-16	Standard	Jar	100

FIXINGS FOR CABLES

CABLE CLIPS


FLAT CABLE CLIPS


Application(s):

Cable fixation in solid materials such as concrete, masonry and wood.

Technical details:

- Material: polyethylene.
- Steel nail inserted.



AU Part #	BIZ-reference	Color	Cable type	Section (mm ²)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Packaging type	Quantity
BIZ310270	BIZ 310 270	White	Twin	1-1,5	8	7	25	7,9	13,5	4,9	Jar	100
BIZ310271	BIZ 310 271	White	Twin and earth	1-1,5	7	8,2	25	9,6	18	4,4	Jar	100
BIZ311271	BIZ 311 271	White	Twin and earth	1-1,5	7	8,2	25	9,6	18	4,4	Bucket	500
BIZ310273	BIZ 310 273	White	Twin and earth	2,5	10	10	25	12,4	20,7	6	Jar	100
BIZCCF25TEP	BIZ 311 173	White	Twin and earth	2,5	10	10	25	12,4	20,	6	Bucket	500
BIZ310275	BIZ 310 275	White	Twin and earth	4	12	9,4	23	13,5	21	8,1	Jar	100
BIZCCF4TEP	BIZ 311 175	White	Twin and earth	4	12	9,4	23	13,5	21	8,1	Bucket	500
BIZ310277	BIZ 310 277	White	Twin and earth	6	11	11	25	15	24,8	6,8	Jar	100

FIXINGS FOR TUBES AND CONDUITS

METAL CLAMPS

METAL HALF SADDLES



Application(s):

Used to secure and mount electrical cables and conduits to a variety of work surfaces. For indoor and outdoor application.

Technical details:

- Material: steel Q235.
- All references in electro-galvanized steel except the BIZ 390 069 in hot dip galvanized steel.
- Coating: blue-white zinc galvanized, $\geq 5 \mu\text{m}$.

- Quick and easy installation: "Clips" feature for snapping and positioning the saddles onto conduit before securing it.
- Reinforced rib for extra strength.



AU Part #	BIZ-reference	Ø (mm)	Ø1 (mm)	H (mm)	L (mm)	L1 (mm)	W (mm)	Thickness (mm)	Quantity per box	Selling unit
BIZMHS16	BIZ 390 066	16	5	17	45	33	19	1,2	100	Each
BIZMHS20	BIZ 390 067	20	5	21	50,8	38,6	19	1,2	100	Each
BIZMHS20A	BIZ 390 068	20	6,5	21	50,8	38,6	19	1,2	100	Each
BIZMHS20HDC	BIZ 390 069	20	5	21	50,8	38,6	19	1,2	100	Each
BIZMHS25	BIZ 390 070	25	5	26,8	59,5	45,7	25,2	1,2	100	Each
BIZMHS25A	BIZ 390 071	25	6,5	26,8	59,5	45,7	25,2	1,2	100	Each
BIZMHS32	BIZ 390 072	32	6,2	33,6	71,9	58,4	25,2	1,2	50	Each
BIZMHS40	BIZ 390 073	40	6,2	43	80	66,2	31,9	1,2	50	Each
BIZMHS50	BIZ 390 074	50	6,2	51	92,5	79,5	39,2	1,7	20	Each



FIXINGS FOR TUBES AND CONDUITS

METAL CLAMPS

METAL FULL SADDLES


Application(s):

Used to secure and mount electrical cables and conduits to a variety of work surfaces. For indoor and outdoor application.

Technical details:

- Material: electro-galvanized steel Q235.
- Coating: blue-white zinc, $\geq 5 \mu\text{m}$.

• Reinforced rib for extra strength.



AU Part #	BIZ-reference	Ø (mm)	Ø1 (mm)	H (mm)	L (mm)	L1 (mm)	W (mm)	Thickness (mm)	Quantity per box	Selling unit
BIZMFS12	BIZ 390 059	12	5	13,3	40	29,8	13,2	0,7	100	Each
BIZMFS20	BIZ 390 061	20	5	22,3	52,3	40,2	16,2	0,95	100	Each
BIZMFS25	BIZ 390 062	25	5,5	28,8	60,2	46,5	19,2	0,95	100	Each
BIZMFS32	BIZ 390 063	32	5,5	35,6	80,5	63,5	25,8	1,2	50	Each
BIZMFS40	BIZ 390 064	40	5,5	42	90,5	74,5	25,8	1,2	50	Each
BIZMFS50	BIZ 390 065	50	5,5	52,8	111,3	95,3	25,8	1,2	20	Each

STAINLESS STEEL METAL HALF SADDLES

Application(s):


Used to secure and mount electrical cables and conduits to a variety of work surfaces. For indoor and outdoor applications.

Technical details:

- Material: stainless steel 304.

• Quick and easy installation: "Clips" feature for snapping and positioning the saddles onto conduit before securing it.

• Reinforced rib for extra strength.



AU Part #	BIZ-reference	Ø (mm)	Ø1 (mm)	H (mm)	L (mm)	L1 (mm)	W (mm)	Thickness (mm)	Quantity per box	Selling unit
BIZMHS20SS	BIZ 310 411	20	5	21	50,8	38,6	19	1,2	100	Each
BIZMHS25SS	BIZ 310 412	25	5	26,8	59,5	45,7	25,2	1,2	100	Each
BIZMHS32SS	BIZ 310 413	32	6,2	33,6	71,9	58,4	25,2	1,2	50	Each

FIXINGS FOR TUBES AND CONDUITS

METAL CLAMPS

STAINLESS STEEL METAL FULL SADDLES


Application(s):

Used to secure and mount electrical cables and conduits to a variety of work surfaces.

• Reinforced rib for extra strength.


Technical details:

- Material: stainless steel 304.



AU Part #	BIZ-reference	Ø (mm)	Ø1 (mm)	H (mm)	L (mm)	L1 (mm)	W (mm)	Thickness (mm)	Quantity per box	Selling unit
BIZMFS20SS	BIZ 310 402	20	5	22,3	52,3	40,2	16,2	1	100	Each
BIZMFS25SS	BIZ 310 403	25	5,5	28,8	60,2	46,5	19,2	1	100	Each
BIZMFS32SS	BIZ 310 404	32	5,5	35,6	80,5	63,5	25,8	1,2	50	Each

CONNECTION SYSTEMS

TERMINAL BLOCKS


TERMINAL BLOCKS **NEW**

12-way polypropylene terminal blocks. Supplied with screws engaged at 1/3.

Technical details:

- Glow wire test: 960 °C.
- EN 60998, NF EN 60695-2, CEI 60664-1

• Ultra-flexible blocks.
• Can be separated in 1.5 turns without the use of tools.

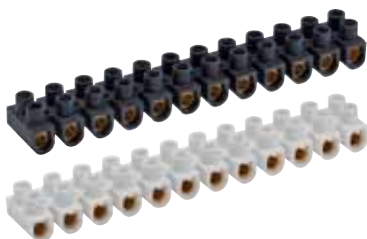

AU Part #	BIZ-reference	Color	Section (mm ²)	Length (mm)	Height (mm)	Depth (mm)	Voltage (V)	Quantity
BIZ320001	BIZ 320 001	Black	2,5	93	13	16	400	10
BIZ320002	BIZ 320 002	Black	6	109	14	17	400	10
BIZ320003	BIZ 320 003	Black	10	131	16	20	400	10
BIZ320004	BIZ 320 004	Black	16	153	20	23	400	10
BIZ320005	BIZ 320 005	Black	25	204	24	32	400	10
BIZ320006	BIZ 320 006	White	2,5	93	13	16	400	10
BIZ320007	BIZ 320 007	White	6	109	14	17	400	10
BIZ320008	BIZ 320 008	White	10	131	16	20	400	10
BIZ320009	BIZ 320 009	White	16	153	20	23	400	10
BIZ320010	BIZ 320 010	White	25	204	24	32	400	10



CONNECTION SYSTEMS

CONNECTORS

LEVER PUSH-IN WIRE CONNECTORS NEW



Clamping connectors for solid, rigid stranded and flexible wires.

Technical details:

- Glow wire test: 960 °C.
- Clamping range: 0.2 mm² to 2.5 mm² for solid, rigid stranded and flexible wires.
- Material: polycarbonate.
- Copper connection system.
- Voltage: 450 V.
- Intensity: 24 A.
- Strip off 10 mm.

Instructions:


Flexible wires:

1. Strip off the wire at 10 mm.
2. Lift the levers.
3. Put the wires in the connector.
4. Lower the levers.

Solid wires:

1. Strip off the wire at 10 mm.
2. Direct insertion of the stripped solid wires in the connector (closed levers).

- Connection of rigid wires without activating the release lever.
- Viewing window for visual inspection of the clamping points means greater safety during installation.

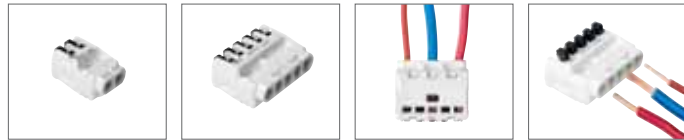

AU Part #	BIZ-reference	Number of inputs	Length (mm)	Width (mm)	Height (mm)	Quantity per pot
BIZ300512	BIZ 300 512	2	21	11,9	11,7	100
BIZ300513	BIZ 300 513	3	21	16,1	11,7	75
BIZ300515	BIZ 300 515	5	21	24,5	11,7	50

SCREW CONNECTORS NEW

Insulated screw connectors.
Accomodate a maximum of 2 x 6 mm² cables.
Made in one and two screw format.

Technical details:

- Body material: polycarbonate.
- Connections material: brass.
- Voltage: 380 V.
- Amperage: 32 A.
- Working temperature: -60 to +135 °C.

- Clear plastic housing so termination can be visually checked.



AU Part #	BIZ-reference	Section (mm ²)	Quantity per jar
BIZ390052	BIZ 390 052	6	100
BIZ390053	BIZ 390 053	2 x 6	50

CONNECTIONS SEALING

SEALING GELS

BIZ'GEL SEALING GEL

Two components gel with high dielectric, thermal and sealing characteristics. In two practical bottles, the required quantity of the two components should be mixed in the ratio 1:1.

Application(s):

Sealing and insulation of electrical connections.

Ideal for sealing junction boxes outdoors or in damp environments.

Suitable for sealing outdoor automated devices, intercoms, outdoor electrical and swimming pool installations, etc.

Technical details:

- Dielectric strength: > 20 kV/mm.
- Volume resistivity: > 2.10¹⁵ Ω/cm.
- Voltage: from 0.6 to 1 kV.
- Installation temperature: +0 °C to +40 °C.
- Operating temperature after polymerisation: -40 °C to +200 °C.
- Reticulation depending on the temperature:
 ≈ 15 min at 20 °C.
 ≈ 45 min at 10 °C.
 ≈ 190 min at 0 °C.

Instructions:

1. Pour the two components in the ratio 1:1.
2. Mix in the pouring pot for 30 seconds.
3. Pour the gel into the product to make it watertight.

Advice:

For optimum polymerisation, mix Biz'Gel at a temperature close to 23 °C. Polymerisation may be longer if the product is conditioned at lower temperatures.

Technical documentation available on our website: SDS.

> IP68

- Power may be switched back on in under 10 minutes.
- Easily re-accessible.
- Non toxic.
- No shelf-life.
- Polymerisation, even at low temperatures.



AU Part #

BIZ710295

BIZ-reference

BIZ 710 295

Net volume (l)

1



CONNECTIONS SEALING

SEALING GELS

BIZ'GEL SEALING GEL, POUCH

The preset dosage saves time and gel!

Two components gel with high dielectric, thermal and sealing characteristics. Sealed pouches with preset dosage of the bi-component sealing gel.

Application(s):

Sealing and insulation of electrical connections. Ideal for sealing junction boxes installed outdoors or in humid environment, with its preset dosage adapted to the dimensions of most standard junction boxes. Suitable for sealing outdoor automated devices, intercoms, outdoor electrical and swimming pool installations, etc.

Technical details:

- Dielectric strength: > 20 kV/mm.
- Volume resistivity: > 2.10¹³ Ω/cm.
- Voltage: from 0.6 to 1 kV.
- Installation temperature: +0 °C to +40 °C.
- Operating temperature after polymerization: -40 °C to +200 °C.
- Fast reticulation: less than 10 minutes at 23 °C.

Instructions:

1. Remove the tab separating the 2 components.
2. Mix the components for 30 seconds.
3. Cut a hole in one of the pouch angles.
4. Pour the gel into the product to make it watertight.

Advice:

For optimum polymerization, mix Biz'Gel at a temperature close to 23 °C. Polymerization may be longer if the product is conditioned at lower temperatures.

Technical documentation available on our website: SDS.

> IP68

- Dosage preset according to the box to be filled.
- Power may be switched back on in less than 10 minutes.
- Easily re-accessible.
- Non toxic.
- No shelf-life.
- Polymerization, even at low temperatures.



Net volume (ml)

210

Dimensions of junction boxes to fill (mm)

Ø 80

AU Part #

BIZ710306

BIZ-reference

BIZ 710 306

CONNECTIONS SEALING

SEALING GELS

BIZ'GEL EXPRESS SEALING GEL

Mono-component ready-to-use injectable gel!

Injectable and ready-to-use mono-component gel in 280 ml cartridge.

Application(s):

Sealing and insulation of electrical connections.
Ideal for watertightness of confined junction boxes, just inject BIZ'GEL EXPRESS regardless of the position of your junction box or connection system.
Ideal solution for watertightness of all junction boxes in your worksites!

Technical details:

- Dielectric strength: > 23 kV/mm.
- Voltage: up to 1 kV.
- Installation temperature: -40 °C to +110 °C.
- Operating temperature after polymerization: -60 °C to +200 °C.

Instructions:

Use a cartridge gun.

Technical documentation available on our website: SDS.

> IP68

- Already cross-linked, ready to use.
- Reusable.
- Self-amalgamating.
- Usable immediately at low temperature down to -40 °C!
- No mixing, no waiting time.
- Easily re-accessible.
- Non toxic.
- No shelf-life.



AU Part #

BIZ-reference

BIZGELEXP

BIZ 710 000

Net volume (ml)

280



CONNECTIONS SEALING

SQUALES

SQUALE MINI

Quick repair of your damaged cables!

- IPX8 for immersed installations.
- Quick repair of your damaged cables.
- Non toxic.

Connector's sealing cover for cables with a section up to 4 mm².
Supplied by 8 without connection system.

Application(s):

Ensures quick and safe sealing of your connections.
Ideal in outdoor, damp or immersed environments.

Technical details:


- Contains neutral and non toxic insulating gel.

Instructions:

1. Make your connection using a block or a connection terminal.
2. Insert your connection into the SQUALE MINI.
3. Close the SQUALE MINI, check that the gel slightly protrudes from the SQUALE MINI by winding the cable.

Technical documentation available on our website: SDS.

> IPX8

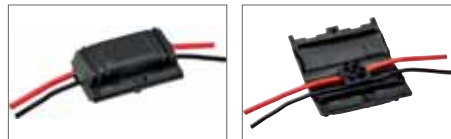

AU Part #	BIZ-reference	Capacity 1 conductor (mm ²)	Capacity 2 conductors (mm ²)	Dimensions (mm)	Quantity per box
BIZ710293	BIZ 710 293	1-4	1-4	61 x 18	Each

SQUALE CONNECTION KITS

Quick, waterproof, efficient

- IPX8 for immersed installations.
- Full range dedicated to residential and tertiary.
- Non toxic.

Application(s):

For connecting, insulating, sealing and protecting copper electrical cables.
Supplied with cable centring device and cable ties for holding conduits.

Technical details:


- Voltage: 0.6 to 1 kV.

Instructions:

1. Strip and connect the cables.
2. Insert the separator and centre the cables in the enclosure.
3. Close the enclosure and lock in the conduits.

Technical documentation available on our website: SDS.

> IPX8

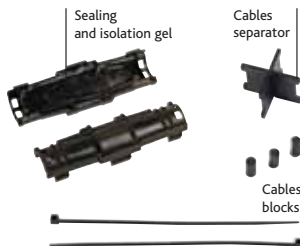

AU Part #	BIZ-reference	Capacity 1 conductor (mm ²)	Capacity 2 conductors (mm ²)	Capacity 3 conductors (mm ²)	Capacity 4 conductors (mm ²)	Dimensions (mm)
BIZ710294	BIZ 710 294	1,5-50	1,5-10	1,5-10	1,5-6	105 x 55


INDUSTRIAL CABLING COMPONENTS

CABLE ENDS

BOOT LACES PIN NEW

Technical details:

- Socket material: tinned copper.
- Insulation material: nylon.

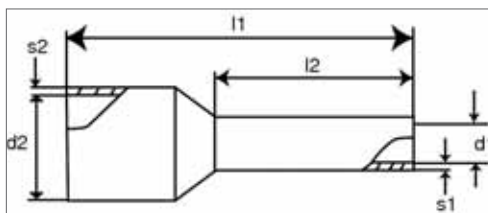

AU Part #	BIZ-reference	Color	Section (mm ²)	L1 (mm)	L2 (mm)	Quantity	Packaging type
BIZ225040	BIZ 225 040	Purple	0,25	10,4	6	100	Plastic box
BIZ225041	BIZ 225 041	White	0,5	14	8	100	Plastic box
BIZ225042	BIZ 225 042	Blue	0,75	14,3	8	100	Plastic box
BIZ225043	BIZ 225 043	Red	1,0	14,3	8	100	Plastic box
BIZ225044	BIZ 225 044	Black	1,5	14,3	8	100	Plastic box
BIZ225045	BIZ 225 045	Grey	2,5	15,4	8	100	Plastic box
BIZ225046	BIZ 225 046	Orange	4	17,4	10	100	Plastic box
BIZ225047	BIZ 225 047	Green	6	20,5	12	50	Plastic box
BIZ225048	BIZ 225 048	Brown	10	20,8	12	25	Plastic box
BIZ225049	BIZ 225 049	White	16	22	12	25	Plastic box



INDUSTRIAL CABLING COMPONENTS

CABLE ENDS

ACCESSORY

CRIMPING TOOL FOR BOOT LACES < 10 MM² **NEW**



AU Part #

BIZ790280 / BIZ 790 280

ACCESSORY

CRIMPING TOOL FOR BOOT LACES > 10 MM² **NEW**




AU Part #

BIZ790281 / BIZ 790 281

NON INSULATED TERMINALS

NON INSULATED TERMINALS **NEW**



CRIMPING TOOL FOR OPEN
BARREL TERMINALS
BIZ 790 278



AU Part #	BIZ-reference	Type	Connector material	L (mm)	I1 (mm)	I2 (mm)	Thickness (mm)	s1 (mm)	s2 (mm)	Packaging type	Packaging
BIZ231059	BIZ 231 059	Female connector	Tinned brass	15,5	6,3	6,3	0,25	3,8	2,8	Plastic box	100
BIZ231060	BIZ 231 060	Female connector	Tinned brass	15,5	6,4	7	0,30	5,6	2	Plastic box	100
BIZ231061	BIZ 231 061	Female connector	Tinned brass	19	7,2	8,7	0,40	5,3	3,8	Plastic box	100

ACCESSORY

CRIMPING TOOL FOR OPEN BARREL TERMINALS **NEW**



AU Part #


BIZ790278 / BIZ 790 278

INDUSTRIAL CABLING COMPONENTS

PRE-INSULATED TERMINALS AND SLEEVES NEW

BizLine supplies a full range of terminals and sleeves pre-insulated with UL approved PVC insulation. Ring and fork terminals and sleeves are made from electrolytic copper sheet, clips are made of brass. All terminals are tin-coated for protection against oxidation and have serrated barrels to improve contact with cables and for improved pull-off strength after crimping.
 Maximum operating conditions: 105 °C and 600 V for ring- and fork terminals, 75 °C and 300 V for clips and sleeves.

WHY SHOULD SPARKIES USE A DOUBLE GRIP TERMINAL?



BETTER STRENGTH/GRIP

THANKS TO THE ADDITIONAL COAT OF STEEL

IDEAL FOR HIGH VIBRATION TYPE APPLICATIONS:
 INDUSTRIAL AREAS, TRANSPORTS, DOMESTIC
 APPLIANCES, ENERGY INDUSTRY





INDUSTRIAL CABLING COMPONENTS


PRE-INSULATED TERMINALS AND SLEEVES

PRE-INSULATED TERMINALS AND SLEEVES, WIRE CROSS-SECTION 0.5 TO 1.5 MM² **NEW**

Double grip terminals.

Technical details:

- Copper sleeve on barrel.



HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

AU Part #	BIZ-reference	Type	Connector material	Insulating Material	Screw Ø (mm)	A (mm)	Ø T (mm)	L (mm)	E Ø (mm)	Ø I (mm)	Thickness (mm)	Quantity	Packaging type
BIZ231000	BIZ 231 000	Female bullet connector	Tinned brass	PVC	-	3,9	-0	23,3	4	1,7	0,4	50	Plastic box
BIZ231001	BIZ 231 001	Male bullet connector	Tinned brass	PVC	-	4	-0	21,5	4	1,7	0,4	50	Plastic box
BIZ231002	BIZ 231 002	Fork terminal	Tinned copper	PVC	3	5,7	3,2	21,5	4,2	1,7	0,75	100	Plastic box
BIZ231003	BIZ 231 003	Fork terminal	Tinned copper	PVC	4	8,1	4,3	21,5	4,2	1,7	0,75	100	Plastic box
BIZ231004	BIZ 231 004	Fork terminal	Tinned copper	PVC	5	8,1	5,3	21,5	4,2	1,7	0,75	100	Plastic box
BIZ231005	BIZ 231 005	Fork terminal	Tinned copper	PVC	6	9,5	6,4	21,5	4,2	1,7	0,75	100	Plastic box
BIZ231006	BIZ 231 006	Splice terminal	Tinned copper	PVC	-	-0	-0	26,5	4,5	1,8	-	100	Plastic box
BIZ231007	BIZ 231 007	Waterproof sleeve with glue line	Tinned copper	PVC	-	-0	-0	36	-0	1,7	-	50	Plastic box
BIZ231008	BIZ 231 008	Lip blade terminal	Tinned copper	PVC	-	-0	-0	27,9	4	1,7	0,75	50	Plastic box
BIZ231009	BIZ 231 009	Lip blade terminal	Tinned copper	PVC	-	-0	-0	27,9	4	1,7	0,75	50	Plastic box
BIZ231010	BIZ 231 010	Pin connector	Tinned copper	PVC	-	-0	-0	22,3	4	1,7	0,75	100	Plastic box
BIZ231011	BIZ 231 011	Female quick connector	Tinned brass	PVC	-	6,6	6,35	20,8	4	1,7	0,4	100	Plastic box
BIZ231012	BIZ 231 012	Female quick connector	Tinned brass	PVC	-	6,6	6,35	22,2	4	1,7	0,4	100	Plastic box
BIZ231013	BIZ 231 013	Tab quick connector	Tinned brass	PVC	-	6,35	-0	21,8	4	1,7	0,4	100	Plastic box
BIZ231015	BIZ 231 015	Ring terminal	Tinned copper	PVC	3	5,5	3,2	18	4	1,7	0,75	100	Plastic box
BIZ231016	BIZ 231 016	Ring terminal	Tinned copper	PVC	5	8	4,3	21,3	4	1,7	0,75	100	Plastic box
BIZ231017	BIZ 231 017	Ring terminal	Tinned copper	PVC	5	8	5,3	21,3	4,2	1,7	0,75	100	Plastic box
BIZ231018	BIZ 231 018	Ring terminal	Tinned copper	PVC	6	11,6	6,4	27,3	4,2	1,7	0,75	100	Plastic box


INDUSTRIAL CABLING COMPONENTS

PRE-INSULATED TERMINALS AND SLEEVES

PRE-INSULATED TERMINALS AND SLEEVES, WIRE CROSS-SECTION 1.5 TO 2.5 MM² **NEW**

Technical details:

- With copper sleeve on barrel.



AU Part #	BIZ-reference	Type	Connector material	Insulating Material	Screw Ø (mm)	T (mm)	A (mm)	L (mm)	E Ø (mm)	Ø I (mm)	Thickness (mm)	Quantity	Packaging type
BIZ231021	BIZ 231 021	Female bullet connector	Tinned brass	PVC	-	4,9	-0	23,3	4,7	2,3	0,40	50	Plastic box
BIZ231022	BIZ 231 022	Male bullet connector	Tinned brass	PVC	-	-0	5	21,2	4,7	2,3	0,40	50	Plastic box
BIZ231023	BIZ 231 023	Fork terminal	Tinned copper	PVC	3	3,2	5,7	21,5	5	2,3	0,80	100	Plastic box
BIZ231024	BIZ 231 024	Fork terminal	Tinned copper	PVC	4	4,3	7,9	21,5	5	2,3	0,80	100	Plastic box
BIZ231025	BIZ 231 025	Fork terminal	Tinned copper	PVC	5	5,3	9,3	21,5	5	2,3	0,80	100	Plastic box
BIZ231026	BIZ 231 026	Fork terminal	Tinned copper	PVC	6	6,4	12	27,5	5	2,3	0,80	100	Plastic box
BIZ231027	BIZ 231 027	In line splice terminal	Tinned copper	PVC	-	-0	-0	27,5	5,2	2,5	-	50	Plastic box
BIZ231028	BIZ 231 028	Waterproof sleeve	Tinned copper	high density PE	-	-0	-0	36	-0	2,3	-	50	Plastic box
BIZ231029	BIZ 231 029	Lip blade terminal	Tinned copper	PVC	-	-0	3	27,9	5	2,3	0,80	50	Plastic box
BIZ231030	BIZ 231 030	Lip blade terminal	Tinned copper	PVC	-	-0	4,6	27,9	5	2,3	0,80	50	Plastic box
BIZ231031	BIZ 231 031	Pin connector	Tinned copper	PVC	-	-0	1,9	22,3	5	2,3	0,80	100	Plastic box
BIZ231033	BIZ 231 033	Fully insulated female quick connector	Tinned brass	PVC	-	6,6	-0	22,2	4,7	2,3	0,40	100	Plastic box
BIZ231034	BIZ 231 034	Male tab quick connector	Tinned brass	PVC	-	6,35	-0	21,8	4,7	2,3	0,40	100	Plastic box
BIZ231036	BIZ 231 036	Ring terminal	Tinned copper	PVC	3	3,2	6,6	18,3	5	2,3	0,80	100	Plastic box
BIZ231037	BIZ 231 037	Ring terminal	Tinned copper	PVC	4	4,3	8,5	22,3	5	2,3	0,80	100	Plastic box
BIZ231038	BIZ 231 038	Ring terminal	Tinned copper	PVC	5	5,3	9,5	22,3	5	2,3	0,80	100	Plastic box
BIZ231039	BIZ 231 039	Ring terminal	Tinned copper	PVC	6	6,4	12	27,3	5	2,3	0,80	50	Plastic box



INDUSTRIAL CABLING COMPONENTS


PRE-INSULATED TERMINALS AND SLEEVES

PRE-INSULATED TERMINALS AND SLEEVES, WIRE CROSS-SECTION 4 TO 6 MM² **NEW**

Double crimp terminals and disconnectors.

Technical details:

- With copper sleeve on barrel.



AU Part #	BIZ-reference	Type	Connector material	Insulating Material	Screw Ø (mm)	A (mm)	T (mm)	L (mm)	E Ø (mm)	Ø I (mm)	Thickness (mm)	Quantity	Packaging type
BIZ231045	BIZ 231 045	Fork terminal	Tinned copper	PVC	6	12	6,4	32	6,8	3,4	1	100	Plastic box
BIZ231046	BIZ 231 046	Sleeve	Tinned copper	PVC	-	-	-	31,5	7	3,4	-	100	Plastic box
BIZ231047	BIZ 231 047	Waterproof sleeve	Tinned copper	high density PE	-	-	-	41	-	3,4	-	100	Plastic box
BIZ231048	BIZ 231 048	Lip blade terminal	Tinned copper	PVC	-	4,6	-	30,2	7	3,4	1	100	Plastic box
BIZ231049	BIZ 231 049	Pin connector	Tinned copper	PVC	-	2,8	-	27,5	6,8	3,4	1	100	Plastic box
BIZ231056	BIZ 231 056	Ring terminal	Tinned copper	PVC	6	12	6,4	29,5	6,8	3,4	1	100	Plastic box
BIZ231057	BIZ 231 057	Ring terminal	Tinned copper	PVC	8	15	8,4	34	6,8	3,4	1	100	Plastic box
BIZ231058	BIZ 231 058	Ring terminal	Tinned copper	PVC	10	15	10,5	34	6,8	3,4	1	100	Plastic box

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

INDUSTRIAL CABLING COMPONENTS

PRE-INSULATED TERMINALS AND SLEEVES

ACCESSORY **CRIMPING PLIERS FOR REINFORCED TERMINALS** **NEW**



AU Part # **BIZ790279** / BIZ 790 279

ACCESSORY **TOOL FOR HEAT SHRINKABLE TERMINALS** **NEW**



AU Part # **BIZ790282** / BIZ 790 282

TOOL DOUBLE GRIP TERMINALS (BRASS DISCONNECTORS) **NEW**



AU Part # **BIZ790283** / BIZ 790 283



INDUSTRIAL CABLING COMPONENTS

CABLE GLANDS AND ACCESSORIES

PA 6.6 CABLE GLANDS

Contents: locknut, washer, body, seal and nut.

Application(s):

Can be mounted directly on to pre-drilled panel hole using the locknut or can be directly screwed onto metric threaded holes.

Technical details:

- Material: UL approved polyamide 6.6.
- Flammability: UL 94V-2.
- Metric Pitch: 1.5 mm.
- Color: black.

> IP68



AU Part #	BIZ-reference	Mounting Hole (mm)	Minimum cable Ø (mm)	Maximum cable Ø (mm)	Inside Ø (mm)	Quantity	Selling unit
BIZCGP12	BIZ 206 212	12	3	7,5	8,3	50	Each
BIZCGP16	BIZ 206 216	16	5	10	10,9	50	Each
BIZCGP20	BIZ 206 220	20	10	14	15	30	Each
BIZCGP25	BIZ 206 225	25	13	18	18,6	20	Each
BIZCGP32	BIZ 206 232	32	18	25	26	10	Each
BIZCGP40	BIZ 206 240	40	22	32	33,7	5	Each
BIZCGP50	BIZ 206 250	50	30	38	41,9	2	Each
BIZCGP63	BIZ 206 263	63	34	44	55	2	Each

ROOF FLASHING

Application(s):

Used for flashing roof and wall penetrations of electrical wires, PVC conduits, etc.

Technical details:

- Material: EPDM and bendable aluminium flange.



AU Part #	BIZ-reference	Base thickness (mm)	Aluminum plate thickness (mm)	Base size (mm)	Type
BIZF035G	BIZ 225 023	2,5	0,6	80 x 70	0-35
BIZF555G	BIZ 225 024	2,9	0,6	100 x 100	5-55

INDUSTRIAL CABLING COMPONENTS

HEAT-SHRINK TUBING

2/1 HEAT-SHRINK TUBING WITHOUT ADHESIVE

Thin wall 2/1 heat-shrink tubing without adhesive.

Application(s):

For general and specific applications in the following areas: electrical insulation, marking and identification, protection (mechanical against corrosion), management and maintenance of wires.

Technical details:

- Thin wall, 2/1 shrinkage in length 1.2 meter.
- Heat-shrink tubing in flexible flame retardant polyolefin (except clear).
- Working temperature: -45 °C to +125 °C (clear is -45 °C to +105 °C).
- Shrink temperature: 120 °C (clear is 105 °C).
- Dielectric strength (IEC 243): 15 kV/mm.
- Tensile strength: 10.4 Mpa.
- Rate voltage: 600 V.
- Self-extinguishing in accordance with UL224 (except clear).



AU Part #	BIZ-reference	Color	Wall Ø before shrinking (mm)	Wall Ø after shrinking (mm)
BIZHSTW2BK/4FT	BIZ 218 068	Black	2	1
BIZHSTW2BL/4FT	BIZ 218 069	Blue	2	1
BIZHSTW2CL/4FT	BIZ 218 070	Transparent	2	1
BIZ218071	BIZ 218 071	Yellow/green	2	1
BIZHSTW2RD/4FT	BIZ 218 072	Red	2	1
BIZHSTW2WH/4FT	BIZ 218 073	White	2	1
BIZHSTW2G/4FT	BIZ 218 106	Green	2	1
BIZHSTW2.5BK/4FT	BIZ 218 052	Black	2.5	1.3
BIZHSTW2.5BL/4FT	BIZ 218 053	Blue	2.5	1.3
BIZHSTW2.5RD/4FT	BIZ 218 054	Red	2.5	1.3
BIZHSTW2.5WH/4FT	BIZ 218 055	White	2.5	1.3
BIZHSTW3BK/4FT	BIZ 218 074	Black	3.5	1.8
BIZHSTW3BL/4FT	BIZ 218 075	Blue	3.5	1.8
BIZHSTW3CL/4FT	BIZ 218 076	Transparent	3.5	1.8
BIZHSTW3YG/4FT	BIZ 218 077	Yellow/green	3.5	1.8
BIZHSTW3RD/4FT	BIZ 218 078	Red	3.5	1.8
BIZHSTW3WH/4FT	BIZ 218 079	White	3.5	1.8
BIZHSTW5BK/4FT	BIZ 218 090	Black	5	2.5
BIZHSTW5BL/4FT	BIZ 218 091	Blue	5	2.5
BIZHSTW5YG/4FT	BIZ 218 093	Yellow/green	5	2.5
BIZHSTW5RD/4FT	BIZ 218 094	Red	5	2.5
BIZHSTW5CL/4FT	BIZ 218 095	White	5	2.5
BIZHSTW7BK/4FT	BIZ 218 096	Black	7	3.5
BIZHSTW7BL/4FT	BIZ 218 097	Blue	7	3.5
BIZHSTW7CL/4FT	BIZ 218 098	Transparent	7	3.5
BIZHSTW7YG/4FT	BIZ 218 099	Yellow/green	7	3.5
BIZHSTW7RD/4FT	BIZ 218 100	Red	7	3.5
BIZHSTW7WH/4FT	BIZ 218 101	White	7	3.5
BIZHSTW10BK/4FT	BIZ 218 040	Black	10	5
BIZHSTW10BL/4FT	BIZ 218 041	Blue	10	5
BIZHSTW10CL/4FT	BIZ 218 042	Transparent	10	5
BIZHSTW10YG/4FT	BIZ 218 043	Yellow/green	10	5
BIZHSTW10RD/4FT	BIZ 218 044	Red	10	5
BIZHSTW10WH/4FT	BIZ 218 045	White	10	5
BIZHSTW13BK/4FT	BIZ 218 046	Black	13	6.5
BIZHSTW13BL/4FT	BIZ 218 047	Blue	13	6.5
BIZ218048	BIZ 218 048	Transparent	13	6.5



INDUSTRIAL CABLING COMPONENTS

HEAT-SHRINK TUBING

AU Part #	BIZ-reference	Color	Wall Ø before shrinking (mm)	Wall Ø after shrinking (mm)
BIZHSTW13YG/4FT	BIZ 218 049	Yellow/green	13	6,5
BIZHSTW13RD/4FT	BIZ 218 050	Red	13	6,5
BIZHSTW13WH/4FT	BIZ 218 051	White	13	6,5
BIZHSTW20BK/4FT	BIZ 218 056	Black	20	10
BIZHSTW20BL/4FT	BIZ 218 057	Blue	20	10
BIZHSTW20CL/4FT	BIZ 218 058	Transparent	20	10
BIZHSTW20YG/4FT	BIZ 218 059	Yellow/green	20	10
BIZHSTW20RD/4FT	BIZ 218 060	Red	20	10
BIZHSTW20WH/4FT	BIZ 218 061	White	20	10
BIZHSTW25BK/4FT	BIZ 218 062	Black	25	12,5
BIZHSTW25BL/4FT	BIZ 218 063	Blue	25	12,5
BIZHSTW25CL/4FT	BIZ 218 064	Transparent	25	12,5
BIZHSTW25YG/4FT	BIZ 218 065	Yellow/green	25	12,5
BIZHSTW25RD/4FT	BIZ 218 066	Red	25	12,5
BIZHSTW25WH/4FT	BIZ 218 067	White	25	12,5
BIZHSTW40BK/4FT	BIZ 218 080	Black	40	20
BIZHSTW40YG/4FT	BIZ 218 083	Yellow/green	40	20
BIZHSTW40BL/4FT	BIZ 218 081	Blue	40	20
BIZHSTW40CL/4FT	BIZ 218 082	Transparent	40	20
BIZHSTW40RD/4FT	BIZ 218 084	Red	40	20
BIZHSTW50BK/4FT	BIZ 218 086	Black	50	25
BIZHSTW50BL/4FT	BIZ 218 087	Blue	50	25
BIZHSTW50RD/4FT	BIZ 218 088	Red	50	25
BIZHSTW50WH/4FT	BIZ 218 089	White	50	25
BIZHSTW80BK/4FT	BIZ 218 102	Black	80	41
BIZHSTW80BL/4FT	BIZ 218 103	Blue	80	41
BIZHSTW80RD/4FT	BIZ 218 104	Red	80	41
BIZHSTW80WH/4FT	BIZ 218 105	White	80	41

MEDIUM WALL 3/1 HEAT-SHRINK TUBING WITH ADHESIVE

Medium wall 3/1 heat-shrink tubing with adhesive.

Application(s):

For general and specific applications in the following areas: electrical insulation, marking and identification, protection (mechanical against corrosion), management and maintenance of wires.

Technical details:

- Medium wall, 3/1 shrinkage in length 1.2 meter.
- Heat-shrink tubing in polyolefin with hot melt adhesive.
- Flame retardant: outer jacket layer.
- Working temperature: -45 °C to +125 °C.
- Shrink temperature: 125 °C.
- Dielectric strength (IEC 243): 20 kV/mm.
- Tensile strength: 10.4 Mpa.
- Rate voltage: 600 V.
- Self-extinguishing in accordance with UL224.
- Color: black.



AU Part #	BIZ-reference	Wall Ø before shrinking (mm)	Wall Ø after shrinking (mm)
BIZHSMW10/3	BIZ 218 020	10	3
BIZHSMW19/6	BIZ 218 022	19	6
BIZHSMW28/9	BIZ 218 024	28	9
BIZHSMW38/12	BIZ 218 023	38	12
BIZHSMW52/16	BIZ 218 025	52	16
BIZHSMW85/25	BIZ 218 026	85	25
BIZHSMW115/34	BIZ 218 021	115	34

INDUSTRIAL CABLING COMPONENTS

SLEEVING

BLACK SPIRAL BINDINGS NEW


To protect, hold and organise cables.

• Halogen free.



Technical details:

- Material: polyethylene.
- Color: black.



AU Part #	BIZ-reference	Color	Ø (mm)	Compatible wire Ø (mm)	Width (mm)	Thickness (mm)	Length (m)	Packaging type
BIZ220007	BIZ 220 007	Black	6	4-25	7,4	0,6	10	Plastic bag
BIZ210108	BIZ 210 108	Black	8	6-30	12	0,75	10	Plastic bag
BIZ220008	BIZ 220 008	Black	12	9-32	15	0,85	10	Plastic bag
BIZ210115	BIZ 210 115	Black	15	12-35	15,5	1	10	Plastic bag
BIZ210120	BIZ 210 120	Black	19	15-50	19,2	1,2	10	Plastic bag
BIZ210125	BIZ 210 125	Black	24	20-100	21,5	1,3	10	Plastic bag

TRANSPARENT SPIRAL BINDINGS

Application(s):

Designed to wrap wire bundles to make neat looms.

Technical details:

- Material: high quality polyethylene.
- Color: transparent.



AU Part #	BIZ-reference	Ø (mm)	Compatible wire Ø (mm)	Width (mm)	Thickness (mm)	Length (m)	Packaging type
BIZSB04	BIZ 220 001	6	4-25	7,4	0,6	10	Plastic bag
BIZSB06	BIZ 220 002	8	6-30	12	0,75	10	Plastic bag
BIZSB09	BIZ 220 003	12	9-32	15	0,85	10	Plastic bag
BIZSB12	BIZ 220 004	15	12-35	15,5	1	10	Plastic bag
BIZSB15	BIZ 220 005	19	15-50	19,2	1,2	10	Plastic bag
BIZSB20	BIZ 220 006	24	20-100	21,5	1,3	10	Plastic bag



DEVICE CLAMPS

ELECTRICAL BRACKET C-TYPE

Application(s):

Used to support switches and wall plate into wallboard.

Technical details:

- Material: pre-galvanized steel.



AU Part #	BIZ-reference	Thickness (mm)
BIZEBC	BIZ 500 900	0,08

ELECTRICAL BRACKETS

Application(s):

Used to support electrical metal boxes into metal or wood.

Technical details:

- Material: pre-galvanized steel.




AU Part #	BIZ-reference	Nail length (mm)	Thickness (mm)	Mount Type
BIZEBH	BIZ 500 901	-	1	Horizontal
BIZEBHN	BIZ 500 902	25	1	Horizontal
BIZEBHNA	BIZ 500 903	70	1,2	Horizontal
BIZEBVNA	BIZ 500 904	70	1,2	Vertical
BIZEBVH	BIZ 500 906	-	1	Horizontal and vertical

ELECTRICAL BRACKET PLASTER

Used to support switches and wall plates into plaster board.

Technical details:

- Material: pre-galvanized steel.



AU Part #	BIZ-reference	Thickness (mm)	Dimensions (mm)
BIZEBP	BIZ 500 905	1	151 x 151

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING



HARDWARE

FASTENERS

40

BOLTS AND NUTS

43

PLUGS

44

SUPPORTING SYSTEMS

48

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

FASTENERS

Easy spotting in branch!

1 packaging color = 1 range family!



WOOD SCREWS

NEEDLE POINT SCREWS PAN HEAD PHILLIPS® DRIVE



Pan head enhances clamping forces against metal sheets.



Application(s):

Multi-purpose screws for a wide range of application in timber or steel.

Technical details:

- Yellow zinc plated steel.
- Pan head.
- Phillips® drive.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSPN620	BIZ 770 870	6	20	100
BIZSPN620J	BIZ 770 871	6	20	500
BIZSPN630J	BIZ 770 873	6	30	325
BIZSPN630	BIZ 770 872	6	30	100
BIZSPN640	BIZ 770 874	6	40	100
BIZSPN640J	BIZ 770 875	6	40	250
BIZSPN650	BIZ 770 876	6	50	100
BIZSPN650J	BIZ 770 877	6	50	175
BIZSPN712	BIZ 770 878	7	12	100
BIZSPN712J	BIZ 770 879	7	12	500
BIZSPN720	BIZ 770 880	7	20	100
BIZSPN720J	BIZ 770 881	7	20	500
BIZSPN725	BIZ 770 882	7	25	100
BIZSPN725J	BIZ 770 883	7	25	400
BIZSPN730	BIZ 770 884	7	30	100
BIZSPN730J	BIZ 770 885	7	30	325
BIZSPN740	BIZ 770 886	7	40	100
BIZSPN740J	BIZ 770 887	7	40	200
BIZSPN750	BIZ 770 888	7	50	100
BIZSPN750J	BIZ 770 889	7	50	150



FASTENERS

DRYWALL SCREWS

DRYWALL SCREWS BUGLE HEAD PHILLIPS® DRIVE



• Coarse thread provides stronger tightening and quick installation. ✓



Application(s):

Ideal for attaching drywalls to wood studs.

Technical details:

- Yellow zinc plated.
- Bugle-head.
- Phillips® drive.

Advice:

Use coarse thread when attaching drywalls to softwood studs.
Use fine thread when attaching drywalls to metal studs.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSBN720	BIZ 770 826	7	20	100
BIZSBN720J	BIZ 770 827	7	20	500
• BIZSBN720P	BIZ 770 828	7	20	1000
BIZSBN725	BIZ 770 829	7	25	100
BIZSBN725J	BIZ 770 830	7	25	400
• BIZSBN725P	BIZ 770 831	7	25	1000
BIZSBN730	BIZ 770 832	7	30	100
BIZSBN730J	BIZ 770 833	7	30	325
• BIZSBN730P	BIZ 770 834	7	30	1000
BIZSBN735	BIZ 770 835	7	35	100
• BIZSBN735P	BIZ 770 836	7	35	1000
BIZSBN745	BIZ 770 837	7	45	100
• BIZSBN745J	BIZ 770 838	7	45	175
BIZSBN750	BIZ 770 839	7	50	100
• BIZSBN750J	BIZ 770 840	7	50	150
BIZSBN850	BIZ 770 820	8	50	100
• BIZSBN850J	BIZ 770 821	8	50	500
BIZSBN863	BIZ 770 822	8	63	100
• BIZSBN863J	BIZ 770 823	8	63	100
BIZSBN875	BIZ 770 824	8	75	100
• BIZSBN875J	BIZ 770 825	8	75	80

SHEET METAL SCREWS

SELF DRILLING SCREWS WASHER HEAD PHILLIPS® DRIVE



• Drilling and fastening occurs in the same operation. ✓
• No pre-drilled hole is required thanks to the self drilling shape.
• Washer head provides greater bearing surface into the metal.



Application(s):

For fixing in metal.
Drilling and fastening occurs in the same operation.

No pre-drilled hole is required thanks to the self drilling shape.

Technical details:

- Yellow zinc plated.
- Washer head.
- Phillips® drive.
- Self-drilling.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSBTD812J	BIZ 770 845	8	12	400
BIZSBTD825	BIZ 770 842	8	25	100
• BIZSBTD832J	BIZ 770 847	8	32	140
BIZSBTD825J	BIZ 770 843	8	25	250
BIZSBTD812	BIZ 770 844	8	12	100
BIZSBTD832	BIZ 770 846	8	32	100

FASTENERS

SHEET METAL SCREWS

SHARP POINT WASHER HEAD SCREWS PHILLIPS® DRIVE



Application(s):

For fixing metal.

Technical details:

- Yellow zinc plated.
- Washer head.
- Phillips® drive.

Advice:

Can also be used for non-load bearing wood applications.

- Sharp point eliminates the need for pilot holes in most cases.
- Easy penetration into heavy metal.
- Washer head provides greater bearing surface into the metal.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSBTN812	BIZ 770 849	8	15	100
BIZSBTN812J	BIZ 770 850	8	15	400
BIZSBTN825	BIZ 770 851	8	25	100
BIZSBTN825J	BIZ 770 852	8	25	250
BIZSBTN832	BIZ 770 853	8	32	100
BIZSBTN832J	BIZ 770 854	8	32	140

MACHINE SCREWS PAN HEAD COMBINATION PHILLIPS® DRIVE



Application(s):

For general applications.

Used with nuts or directly into a female threaded receptacle to fasten metal parts together.

Technical details:

- Zinc plated steel.
- Pan head.
- Phillips®-Slotted.

Advice:

Use with BIZ 770 800 or 770 801 zinc plated nuts.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSMTR3161	BIZ 770 856	3/16	1	100
BIZSMTR316112	BIZ 770 857	3/16	1-1/2	50
BIZSMTR316114	BIZ 770 858	3/16	1-1/4	100
BIZSMTR31612	BIZ 770 859	3/16	1/2	100
BIZSMTR3162	BIZ 770 860	3/16	2	50
BIZSMTR3163	BIZ 770 861	3/16	3	50
BIZSMTR31634	BIZ 770 862	3/16	3/4	100
BIZSMTR5321	BIZ 770 863	5/32	1	100
BIZSMTR532112	BIZ 770 864	5/32	1-1/2	100
BIZSMTR532114	BIZ 770 865	5/32	1-1/4	100
BIZSMTR53212	BIZ 770 866	5/32	1/2	100
BIZSMTR5322	BIZ 770 867	5/32	2	50
BIZSMTR53234	BIZ 770 868	5/32	3/4	100



FASTENERS

SHEET METAL SCREWS

SELF DRILLING SCREWS WAFER HEAD PHILLIPS® DRIVE



- Self drilling point.
- Low profile wafer head for low profile finishes.

Application(s):

For light gauge steel to steel and wood applications.

Technical details:

- Yellow zinc plated.
- Wafer head.
- Phillips® drive.
- Self drilling.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
BIZSWD1022	BIZ 770 891	10	22	100
BIZSWD1030	BIZ 770 892	10	30	100
• BIZSWD1040	BIZ 770 893	10	40	100

NAILS

METAL CLOUDS



- Good corrosion protection.

Application(s):

Ideal for external sheet metal to timber connections.

Technical details:


- Galvanized steel.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity per box
• BIZCT2825	BIZ 770 919	2,8	25	500 g

BOLTS AND NUTS

BOLTS

ROOFING BOLTS AND HEX NUTS TRUSS HEAD ZINC PLATED STEEL



Application(s):

For roofing, guttering, racking and trunking.

Technical details:

- Zinc plated steel.
- Truss head.
- Phillips®-Slotted.



AU Part #	BIZ-reference	Ø (gauge)	Length (mm)	Quantity
• BIZRBN141	BIZ 770 921	1/4	1	100
• BIZRBN142	BIZ 770 922	1/4	2	50
• BIZRBN1434	BIZ 770 923	1/4	3/4	50
• BIZRBN3161	BIZ 770 924	3/16	1	100
• BIZRBN3162	BIZ 770 925	3/16	2	100

NUTS AND BOLTS

WASHERS

WASHERS

**Application(s):**

Used to prevent a nut or a bolt head from pulling through the material, and helps to distribute load force.

Technical details:

- Zinc plated steel.

Advice:

Can also be used as a spacer and with any kind of screw.

AU Part #	BIZ-reference	Ø (gauge)	Quantity
BIZWFZ14	BIZ 770 895	1/4	100
• BIZWFZ18	BIZ 770 896	1/8	100
BIZWFZ316	BIZ 770 897	3/16	100
BIZWFZ532	BIZ 770 898	5/32	100

NUTS

ZINC PLATED HEX NUTS



Can be used with fasteners with a machine screw thread.

Application(s):

General purpose nut.

Technical details:

- Zinc plated.

AU Part #	BIZ-reference	Ø (gauge)	Quantity
• BIZNHP316	BIZ 770 800	3/16	100
• BIZNHP532	BIZ 770 801	5/32	100

PLUGS

UNIVERSAL PLUGS

PLASTIC WALL PLUGS



• Convenient frame pack!

**Application(s):**

For light duty anchoring in concrete, stone, solid brick, plaster and solid block.

Technical details:

- PVC plug.

Instructions:

1. White plugs are suitable for 4.5-6 gauge screws.
2. Red plug are suitable for 8-9 gauge screws.
3. Green plugs are suitable for 10-12 gauge screws.

AU Part #	BIZ-reference	Color	Ø (mm)	Length (mm)
• BIZWPH25	BIZ 770 906	White	5	25
BIZWPRD25	BIZ 770 904	Red	6	25
BIZWPRD35	BIZ 770 905	Red	6	35
BIZWPGN25	BIZ 770 900	Green	7	25
BIZWPGN30	BIZ 770 901	Green	7	30
BIZWPGN35	BIZ 770 902	Green	7	35
BIZWPGN50	BIZ 770 903	Green	7	50



PLUGS

PLUGS FOR HOLLOW AND SOLID MATERIALS

NYLON ANCHORS ROUND HEAD



Application(s):

Designed for use in a variety of surfaces such as concrete, stone, solid brick, hollow block and hollow slab.

Technical details:

- Nylon round head plug.
- Yellow zinc plated nail.

- Nylon body provides insulation between drive screw and work surface.



AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity
BIZNAR525	BIZ 770 794	5	25	100
BIZNAR540	BIZ 770 795	5	40	60
BIZNAR6525	BIZ 770 796	6,5	85	80
• BIZNAR6538	BIZ 770 797	6,5	38	60
• BIZNAR6550	BIZ 770 798	6,5	50	50

SOLID MATERIAL PLUGS

FLANGED WALL PLUGS



Application(s):

For light attachments in solid materials (concrete, cellular concrete, solid breeze block and solid brick).

Technical details:

- Polyamide 6.
- Operating temperature: -40 to +60 °C.
- Color: grey RAL 7035.

- Anti-rotation spigots for optimum attachment.
- Perfect positioning thanks to the collar.



AU Part #	BIZ-reference	Drilling Ø (mm)	Plug length (mm)	Minimum drilling depth (mm)	Thickness of the part to be fixed (mm)	Tear-out resistance * C20/C25 concrete (daN)	Shape	Quantity per box
BIZ720150	BIZ 720 150	5	25	35	2	19	With collar	250
BIZ720151	BIZ 720 151	6	30	40	5	30	With collar	250
BIZ720152	BIZ 720 152	8	40	50	5	33	With collar	120
BIZ720153	BIZ 720 153	10	50	60	5	50	With collar	50
BIZ720154	BIZ 720 154	12	60	70	5	60	With collar	35

* 1 daN = approx. 1 kg.

NYLON ANCHORS MUSHROOM HEAD



Application(s):

Designed for use in a variety of surfaces such as concrete, stone, solid brick, hollow brick, hollow block and hollow slab.

Technical details:

- Nylon mushroom head plug.
- Yellow zinc plated nail.

- Nylon body provides insulation between drive screw and work surface.



AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity
BIZNAM525	BIZ 770 789	5	25	100
BIZNAM6525	BIZ 770 790	6,5	25	80
• BIZNAM6538	BIZ 770 791	6,5	38	60
• BIZNAM6550	BIZ 770 792	6,5	50	50

PLUGS

PLUGS FOR HOLLOW WALL OR BRITTLE MATERIALS

SELF-DRILLING PLASTER METAL PLUGS **NEW**

Used on drywalls with hidden wood studs. ideal for mounting shelves, mirrors, pictures and more.

- Quick and easy installation.
- No pre-drilling required.
- Easy to remove and reinstall.

**Technical details:**

- Zinc plated steel.
- Phillips®-Square.
- Self drilling.

**Instructions:**

1. Using a #2 Phillips®-Square screwdriver, insert the anchor into the desired surface.
2. Turn Clockwise until flush with surface and firmly in place (do not over-torque).
3. Place the object to fix, insert the screw in and turn clockwise until fastened correctly.

Advice:

Do not use for ceiling applications.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
BIZ780032	BIZ 780 032	13	42	100	Jar
BIZ780033	BIZ 780 033	13	42	25	Jar

SELF-DRILLING PLASTER NYLON PLUGS **NEW**

Used in drywall and wallboard, plywood and pegboard. Perfect for curtains, lighting fixtures, fire alarms, shelving, wall decorations, etc.

- Self drilling for time saving.
- No pre-drilling installation!
- Easy to remove and reinstall.

**Technical details:**

- Nylon.
- Self-drilling plugs.
- Phillips® drive.

Instructions:

1. Using a #2 Phillips® screwdriver, insert the anchor into the desired surface.
2. Turn Clockwise until flush with surface and firmly in place (do not over-torque).
3. Place the object to fix, insert the screw in and turn clockwise until fastened correctly.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
BIZ780207	BIZ 780 207	13	42	100	Jar
BIZ780208	BIZ 780 208	13	42	25	Jar

WEDGE ANCHORS **NEW****Application(s):**

Fasteners for heavy product.

Technical details:

- Yellow zinc plated steel.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
BIZ780209	BIZ 780 209	M10	40	50	Jar



PLUGS

PLUGS FOR HOLLOW WALL OR BRITTLE MATERIALS

HOLLOW WALL ANCHORS



• Anti-rotation barbs.



Application(s):

All metal, light duty, cavity fixing for plasterboard and other hollow wall materials.

Technical details:

- Yellow zinc plated steel.
- Phillips® drive.

AU Part #	BIZ-reference	Ø	Drilling Ø (mm)	Wall thickness (mm)	Quantity
BIZHWA05B	BIZ 770 908	M4	8	0 - 5	100
BIZHWA610B	BIZ 770 909	M4	8	6 - 10	25
BIZHWA813B	BIZ 770 910	M4	8	8 - 13	100
BIZHWA1016	BIZ 770 911	M4	8	10 - 16	50

NYLON ANCHOR PLUGS



Nylon plug anchor with 4 prongs.

• Anti-rotation wings that prevent the plug from rotating in the drill hole.



Application(s):

For drywall screws.

Technical details:

- Nylon.

AU Part #	BIZ-reference	Color	Screw Size	Quantity
BIZAP7RD	BIZ 770 932	Red	7G	100
BIZAP8GN	BIZ 770 933	Green	8G	100

HEAVY DUTY PLUGS

SLEEVE ANCHORS HEXAGONAL NUTS



• Full thread system can fit to various fixture thicknesses.
• Long body enables use in soft concrete thanks to good repartition of compression load.



Application(s):

Used in concrete (soft concrete as well) and masonry applications.

Ideal for fastening window frames, partitions, cabinets and more.

A pre-drilled hole, equal to the anchor diameter, is required.

Technical details:

- Yellow zinc plated steel.
- Head type: hex nut.

Instructions:

1. Drill a hole into the surface equal to the diameter and the length of the anchor.
2. Clean the hole.
3. Insert the bolt through the item and into the hole.
4. Tighten the nut with the appropriate torque.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
BIZSAH6535B	BIZ 770 803	6,5	35	100	Each
BIZSAH6555B	BIZ 770 804	6,5	55	100	Each
BIZSAH840B	BIZ 770 805	8	40	100	Each
BIZSAH865B	BIZ 770 806	8	65	50	Each
BIZSAH1040B	BIZ 770 807	10	40	50	Each
BIZSAH1050B	BIZ 770 808	10	50	50	Each
BIZSAH1075B	BIZ 770 809	10	75	50	Each
BIZSAH1095B	BIZ 770 810	10	95	25	Each
BIZSAH1260B	BIZ 770 811	12	60	25	Each
BIZSAH1275B	BIZ 770 812	12	75	25	Each
BIZSAH12100B	BIZ 770 813	12	100	20	Each
BIZSAH12130B	BIZ 770 814	12	130	20	Each

PLUGS

HEAVY DUTY PLUGS

SLEEVE ANCHOR HOOK BOLT



• Hook head provides convenient anchor point for hanging. ✓

**Application(s):**

Designed for medium duty anchoring in concrete, brick and block.

Technical details:

- Yellow zinc plated.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
• BIZSAHB845B	BIZ 770 816	8	45	100	Each

SLEEVE ANCHOR EYE BOLT



• Eye bolt head provides convenient anchor point for tying. ✓

**Application(s):**

Designed for medium duty anchoring in concrete, brick or block.

Technical details:


- Yellow zinc plated.

AU Part #	BIZ-reference	Ø (mm)	Length (mm)	Quantity	Selling unit
BIZSAEB845B	BIZ 770 818	8	45	100	Each

SUPPORTING SYSTEMS

IPN BEAM CLAMPS

VERTICAL FLANGE CLIPS

**Technical details:**

- Yellow zinc plated.
- Prulin gauges: 1.6 to 2.5 mm.

Instructions:

1. Place the hook.
2. Tap on it with a hammer.
3. Place a suspension chain in the holes.

AU Part #	BIZ-reference	Length (mm)	Thickness (mm)	Hole Ø (mm)	Quantity	Selling unit
BIZVFC	BIZ 310 138	42	1	7 (x1); 3 (x3)	100	Each

SPRING SADDLES

Application(s):

Quick, simple attachment of cables and conduit to steel profiles.

Technical details:

- Material: yellow zinc plated.



AU Part #	BIZ-reference	Ø (mm)	Thickness (mm)	Quantity	Selling unit
BIZGC813	BIZ 310 135	8-13	0,9	100	Each
BIZGC1620	BIZ 310 136	16-20	0,9	100	Each
BIZGC2532	BIZ 310 137	25-32	1,1	100	Each



SUPPORTING SYSTEMS

SUPPORTING LOCKS AND KITS

SUSPENSION LOCKS WITH INTEGRATED UNLOCKING SYSTEM **NEW**



The most advanced and versatile suspension lock ever designed!

Application(s):

The BizLine lock allows suspending or securing fastening of cable trays, light fixtures, ventilation ducts, pre-wired electrical distribution ducts, centre points, signs, etc.

Technical details:

- Suspension locks with built-in unlocking system compatible with steel cables Ø 1.5 and Ø 2.5 mm.
- Load accepted (cable Ø 1.5 mm): 35 kg*.
- Load accepted (cable Ø 2.5 mm): 70 kg*.

* The strengths given for BIZ 710 406 locks require the use of BIZ 710 350, BIZ 710 351, BIZ 710 352 and BIZ 710 353 cables. APAVE test report available on request.

Instructions:

1. Arrows indicating the cable entry and exit direction for a safe, easy and quick implementation of suspension loops.
2. Unlocking by simple pressure.
3. Quick adjustment of the length or its modification once the object to be hanged is in place.


Technical documentation available on our website: Test report 1.

- Reduced assembly time: up to 6 times faster installation than a typical suspension adjustment system.
- Easy and quick adjustment without specific tool!
- New streamlined, discrete and light design.
- Versatile: 1.5 mm Ø and 2.5 mm Ø cables.
- Certified.

New technology for easy insertion and unlocking for 1.5 mm and 2.5 mm



Ergonomically designed buttons for quick adjustment without tools!

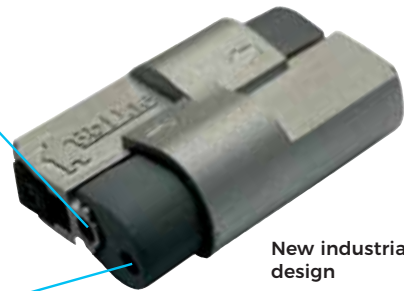

New industrial design



AU Part #

BIZ-reference

Quantity per plastic box

Selling unit

BIZ710406

BIZ 710 406

100

Each

SUPPORTING SYSTEMS

WIRES AND CHAINS

REEL OF WIRE **NEW****Application(s):**

Create wire loops for static light-duty suspensions.

Technical details:

- Woven steel wire.
- Strand core: 7 x 7 steel brands.

Advice:

To use with locking devices BIZ 710 405 and BIZ 710 406.

AU Part #	BIZ-reference	Cable Ø (mm)	Length (m)
BIZ710350	BIZ 710 350	1,5	50
BIZ710351	BIZ 710 351	1,5	150
BIZ710352	BIZ 710 352	2,5	50
BIZ710353	BIZ 710 353	2,5	150

ZINC PLATED CHAIN SINGLE LOOP

Application(s):

Used to hang lights, cables, signs, machine controls, etc.

Technical details:

- Working load limit: 13 kg.



AU Part #	BIZ-reference	Ø	Length (m)	Packaging type
BIZJC2530P	BIZ 710 169	2,6	30,5	Bucket

SUSPENSION CLAMPS

TIE WIRES **NEW****Technical details:**

- Zinc plated steel.



AU Part #	BIZ-reference	Ø (mm)	Quantity	Selling unit
BIZ780218	BIZ 780 218	5	100	Jar
BIZ780219	BIZ 780 219	6,5	100	Jar



SUPPORTING SYSTEMS

SUSPENSION CLAMPS

CATENARY WIRES

Electro galvanized wire strand.



AU Part #	BIZ-reference	Ø (mm)	Length (m)	Tensile strength * (daN)	Packaging type
BIZCW7090180D	BIZ 710 536	0,9	180	41,55	Drum
BIZCW7090500D	BIZ 710 537	0,9	500	41,55	Drum
BIZCW712539	BIZ 710 539	1,20	30	42,12	Roll

* 1 daN = approx. 1 kg.

SPRING TOGGLES ROUND HEAD



Application(s):

Light to medium duty anchors. Used in hollow walls (drywalls, ceiling plasterboard and concrete block) and hollow masonry applications).

Technical details:

- Yellow zinc plated.
- Phillips® drive.

Instructions:

1. Drill the recommended sized hole through the plasterboard.
2. Insert the screw through the fixture to be fastened and thread the toggle for a few turns. Fold the toggle wings and insert the anchor into the hole. The wings will spread behind the cavity wall.
3. Pull back on the fixture to hold the toggle in place against the reverse side of the cavity wall and tighten with a screwdriver, pulling the wings of the anchor firm against the cavity wall.

Advice:

A pre-drilled hole is required.



AU Part #	BIZ-reference	Screw Ø (pouces)	Length (pouces)	Drilling Ø (pouces)	Wall thickness (mm)	Quantity
BIZSTR182	BIZ 770 927	1/8	2	7/16	15	25
BIZSTR3163	BIZ 770 930	1/8	2	7/16	40	15
BIZSTR183	BIZ 770 928	1/8	3	7/16	40	20
BIZSTR3162	BIZ 770 929	3/16	2	9/16	15	25

TURNBUCKLES HOOK AND EYE

Application(s):

Used to adjust the tension or length of ropes, cables and other tensioning systems.

Technical details:

- Body material: Carbon steel Q235B.
- Eye and Hook material: Carbon steel C45.
- Coating: Galvanized steel 5 microns.



AU Part #	BIZ-reference	Screw Ø (mm)	Assembled size (mm)	Eyelet Ø (mm)	Hook Ø (mm)	Working load limit (kg)	Quantity	Selling unit
BIZTBH5	BIZ 770 935	M5	70	10	8	40	10	Each
BIZTBH6	BIZ 770 936	M6	110	10,50	10,50	60	10	Each
BIZTBH8	BIZ 770 937	M8	110	12,50	11	110	5	Each
BIZTBH10	BIZ 770 938	M10	125	15,50	14,50	160	5	Each



TAPES

INSULATING TAPES	54
MULTI-PURPOSE TAPES	54
TAPES FOR SPECIFIC APPLICATIONS	55

INSULATING TAPES

HIGH PERFORMANCE VINYL TAPES

HIGH PERFORMANCE VINYL TAPE NEW

High performance electrical vinyl tape. Synthetic rubber adhesive mass. Flexible, press-on adhesive tape. High resistance to sunshine, water, oil, acid, alkali and corrosive chemicals. Flame-retardant/Self-extinguishing. Lead free.

- High resistance to extreme temperatures.
- UV resistant.
- No feathering.



Application(s):

Implementation of cable harnesses, splicing, wire and cable terminations. Repairing conduits. Electrical insulation at high and low temperatures. Suitable for outdoor use, UV-resistant.

Technical details:

- Dimensions: 19 mm x 20 m x 0.18 mm.
- Tensile strength: 32 N/cm.
- Elongation at break: 240 %.
- Adhesion to steel 2B: 2.25 N/cm.
- Adhesion to backing: 2.15 N/cm.
- Dielectric strength: 40 kV/mm.
- Insulation resistance: $5.0 \times 10^9 \Omega/25 \text{ mm}$.
- Operating temperature: -18 °C to +105 °C.
- Application temperature: -10 °C to +40 °C.
- Color: black.

Advice:

For making cable harnesses, apply the product with at least a 50 % covering.
 > EN 60454, IEC 60454-3-1-11/F-PVCp/105 certified.



AU Part #	BIZ-reference	Color	Length (m)	Width (mm)	Thickness (mm)
BIZ225033	BIZ 225 033	Black	20	19	0,18

MULTI-PURPOSE TAPES

DUCT TAPES

DUCT TAPES

High quality extra adhesive strength.

Application(s):

Suitable for many applications including ducting, insulation and packing.

Technical details:

- Material : premium grade plasticized PVC film.
- Adhesive : Rubber.



AU Part #	BIZ-reference	Color	Length (m)	Width (mm)	Thickness (mm)
BIZDT30BK	BIZ 390 483	Black	30	48	0,13
BIZDT30GY	BIZ 390 484	Grey	30	48	0,13

TAPES FOR SPECIFIC APPLICATIONS

MECHANICAL VENTILATION TAPE NEW

Aluminium tape, acrylic adhesive mass.

Application(s):

Joints in galvanised steel pipework.

Technical details:

- Dimensions: 50 mm x 50 m x 0.07 mm.
- Tensile strength: 40 N/cm.
- Elongation at break: 109 %.
- Adhesion: 10 N/cm.
- Operating temperature: 100 °C.

- Resistant to heat and humidity.
- High adhesion.
- Can be torn by hand.



AU Part #	BIZ-reference	Color	Length (m)	Width (mm)	Thickness (mm)
BIZ351021	BIZ 351 021	Aluminum	50	50	0,07

YELLOW/BLACK ADHESIVE TAPE NEW


PVC tape, rubberised adhesive.

Application(s):

Marking of hazardous traffic routes in workshops.
Identification of mobile equipment.
Demarcation of areas with restricted passage.

Technical details:

- Breaking load: 23 N/cm.
- Elongation at break: 170 %.
- Adhesive power: 1.2 N/cm.
- Unrolling force: 2.3 N/cm.
- Temperature resistance: 80 °C.



AU Part #	BIZ-reference	Length (m)	Width (mm)	Thickness (mm)
BIZ351051	BIZ 351 051	33	50	0,17

TAPES FOR SPECIFIC APPLICATIONS

SITE MARKING TAPE NEW

Technical details:

- Non-adhesive PET tape.
- Dimensions: 75 mm x 500 m x 0.3 mm.



AU Part #	BIZ-reference	Length (m)	Width (mm)	Thickness (mm)
BIZ351040	BIZ 351 040	500	75	0,30

DOUBLE SIDED FOAM TAPE NEW

Double-sided foam tape, solvent-based acrylic adhesive.

Application(s):

Assembly operations for which good load-bearing capacity is required.
Fitting mirrors, beading, and mouldings.
Signs and panels.

Technical details:

- Adhesion on steel: N/cm: 12.
- Breaking load: N/mm²: 65/10.
- Temperature resistance: -15 to +100 °C.
- Application temperature: 0 to +35 °C.
- Bonding period: 24 h at 23 °C.
- Ideal storage temperature: +10 to +30 °C.

- For interior and exterior use (good UV moisture and solvent resistance).
- Excellent shear strength.
- Can be torn by hand.



AU Part #	BIZ-reference	Colour	Length (m)	Width (mm)	Thickness (mm)
BIZ390490	BIZ 390 490	White	10	12	1
BIZ390491	BIZ 390 491	White	10	18	1
BIZ390492	BIZ 390 492	White	10	24	1

TAPES FOR SPECIFIC APPLICATIONS

FASTENING TAPES

UNDERGROUND WARNING TAPES

Non detectable underground tape.

Application(s):

For protection, location and identification of underground utility installations.

Technical details:

- Core inside Ø: 76 mm.

Load at yield

- Mounting direction: 71.2 N.
- Transverse direction: 60.0 N.

Load at break

- Mounting direction: 109.0 N.
- PSI: 18.6 MPa.
- Transverse direction: 104.5 N.
- PSI: 17.9 MPa.

Elongation at break

- Mounting direction: 71.2 N.
- Transverse direction: 60.0 N.

PPT resistance

- Mounting direction: 60 N.
- Transverse direction: 62.3 N.

Tongue tear

- Mounting direction: 13.2 N.
- Transverse direction: 22.7 N.

> AS2648.1:1995.

AS4275.



AU Part #	BIZ-reference	Color	Text	Length (m)	Width (mm)	Thickness (mm)	Material
BIZUMTO100	BIZ 351 061	Orange	WARNING WARNING WARNING ELECTRICAL CABLE BELOW	100	150	0,08	Polyethylene
BIZUMTO500	BIZ 351 065	Orange	WARNING WARNING WARNING ELECTRICAL CABLE BELOW	500	150	0,08	Polyethylene
BIZUMTW100	BIZ 351 071	White	WARNING WARNING WARNING COMMUNICATIONS CABLE BELOW	100	150	0,08	Polyethylene
BIZUMTW500	BIZ 351 075	White	WARNING WARNING WARNING COMMUNICATIONS CABLE BELOW	500	150	0,08	Polyethylene

TAPES FOR SPECIFIC APPLICATIONS

NEW

**DOUBLE GRIP
TAPE 2 M
BIZ351090**

Already available in your branch



**RELIABLE
RESISTANT
RE-OPENABLE!**



Openable and re-usable.



No drill required.



Extreme temperature resistant.



Strong adhesive tape coated with plastic studs which interlock when pressed.



1 Clean grease and dust carefully from the surface for better adhesion



2 Cut 2 strips to the required length.



3 Apply strong pressure to the strips for 30 seconds.



4 Press the 2 strips together and make sure you hear a click guaranteeing a secure grip.



5 To open, separate the 2 strips by pulling (Optimal grip after 24 hours).

TAPES FOR SPECIFIC APPLICATIONS

FASTENING TAPES

DOUBLE GRIP TAPE 2 M NEW

Strong adhesive tape coated with plastic studs which interlock when pressed. This system can be used for invisible, openable and re-usable attachments. The double tape guarantees a reliable and fast attachment with no need for a drill.

- No drill required.
- Re-openable.
- Convenient roll format.
- Excellent resistance to humidity.

Application(s):

Workshop set-up, installation of panels to access cables, attach cable trays, office equipment, etc.

Technical details:

- Maximum load resistance: 3.5 kg/cm².
- Stud density per cm²: 42.
- Resistance to temperature: -30 to +90 °C.
- Installation temperature: +15 to +30 °C.

Instructions:

1. Clean grease and dust carefully from the surfaces to be stuck.
2. Cut 2 strips to the required length.
3. Apply strong pressure to the strips for 30 seconds.
4. Press the 2 strips together and make sure you hear a click guaranteeing a secure grip.
5. To open, separate the 2 strips by pulling.

Advice:

Optimal grip after 36 hours.



AU Part #

BIZ351090

BIZ-reference

BIZ 351 090

Length (m)


2

Width (mm)

25

Thickness (mm)

5,4



CHEMICALS

CHEMICAL FIXINGS

62

MAINTENANCE AEROSOLS

65

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING



CHEMICAL FIXINGS

SEALANTS

WHITE ROOF AND GUTTER SILICONE NEW**Made in Australia!**

BizLine Industrial Grade is a one part medium modulus non slump adhesive silicone sealant.

Application(s):

For use on: air-conditioning units, duct work, roofing and sheet metal work, manufacturing of window frames and glass weather-seal, OEM and white goods manufacturing, plant and factory maintenance.

Technical documentation available on our website: SDS.

- Premium Grade.
- Excellent UV Stability.
- Low VOC.
- Extremely flexible.
- Adhesive / Sealant .
- Neutral Cure.
- Non-slumping: can be used in vertical and overhead joints.
- Excellent resistance to weathering, ultra-violet radiation, vibration, moisture, ozone, temperature extremes, airborne pollutants, some cleaning agents and solvents.



AU Part #	BIZ-reference	Color	Lifetime	Volume (ml)
BIZ710560	BIZ 710 560	Transparent	12 Months	300
BIZ710561	BIZ 710 561	White	12 Months	300



CHEMICAL FIXINGS

ADHESIVES

PVC JOINTING CEMENT CLEAR NEW

Specially formulated resin based adhesive for bonding PVC-U pipe, fittings and sheet. It is fast setting and suited for PVC-U Pipes with a diameter of 100mm or less.

Application(s):

Suitable for non-pressure applications in residential, commercial and industrial work such as sewerage, drainage, storm water, and electrical and cable conduit.

Technical details:

- Complies with the requirements of the standard AS/NZS 3879.
- AS/NZS 4020 approved.
- Watermark and ISO 9001:2008 accredited.

Instructions:

Preparing the joint

1. Ensure pipe is cut square and remove burrs.
2. To ensure correct assembly of joint, mark pipe at a distance equal to full socket depth.
3. Test joint for dry fit.
4. Clean pipe and inside of socket. This is essential to ensure a satisfactory bond.

Making the joint

1. Shake or stir thoroughly the product before using.
2. Apply the product in full even coats to both surfaces firstly to the inside of socket then to external surface of pipe end.
3. Immediately put together, pushing the pipe home to the full depth of the socket.
4. Hold bonded joint in position for at least 30 seconds.
5. Do not touch for 5 minutes.
6. Allow 24 hours curing before testing.

Technical documentation available on our website: SDS.



AU Part #	BIZ-reference	Lifetime	Volume (ml)
BIZ400174	BIZ 400 174	24 Months	125
BIZ400175	BIZ 400 175	24 Months	250
BIZ400176	BIZ 400 176	24 Months	500
BIZ711300	BIZ 711 300	24 Months	1000

PVC JOINTING GLUE BLUE NEW

Specially formulated resin based adhesive for bonding PVC-U pipe, fittings and sheet. It is fast setting and suited for PVC-U Pipes with a diameter of 100mm or less. Product Made in Australia.

Application(s):

Suitable for non-Pressure applications in residential, commercial and industrial work such as sewerage, drainage, storm water, and electrical and cable conduit.

Technical details:

- Complies with the requirements of the standard AS/NZS 3879.
- AS/NZS 4020 approved.
- Watermark and ISO 9001:2008 accredited.

Instructions:

Preparing the joint

1. Ensure pipe is cut square and remove burrs.
2. To ensure correct assembly of joint, mark pipe at a distance equal to full socket depth.
3. Test joint for dry fit.
4. Clean pipe and inside of socket

This is essential to ensure a satisfactory bond.

Making the joint

1. Shake or stir thoroughly the glue before using.
2. Apply the glue in full even coats to both surfaces firstly to the inside of sockets, then to external surface of pipe end.
3. Put together, pushing the pipe home to the full depth of the socket.
4. Hold bonded joint in position for at least 30 seconds.
5. Do not touch for 5 minutes.
6. Allow 24 hours curing before testing.

Technical documentation available on our website: SDS.



AU Part #	BIZ-reference	Lifetime	Volume (ml)
BIZ400170	BIZ 400 170	24 Months	125
BIZ400171	BIZ 400 171	24 Months	250
BIZ400172	BIZ 400 172	24 Months	500
BIZ400173	BIZ 400 173	24 Months	1000



CHEMICAL FIXINGS

ADHESIVES

CLEAR PRIMING FLUID NEW



Solvent based product which is specially formulated to clean and prime PVC pipes and fittings so they are free of dirt and grease. Made in Australia.

Application(s):

The application of the priming fluid is essential preparation prior to the application of PVC glue to ensure a satisfactory bond is achieved.

Technical details:

- Conforms to the stringent performance requirements of AS/NZS 3879.
- AS/NZS 4020 approved.
- Watermark and ISO 9001:2008 accredited.

Technical documentation available on our website: SDS.

AU Part #	BIZ-reference	Lifetime	Volume (ml)
BIZ711301	BIZ 711 301	24 Months	250
BIZ711302	BIZ 711 302	24 Months	500
BIZ711303	BIZ 711 303	24 Months	1000

GUNS FOR CHEMICAL FIXINGS

ACCESSORY

CAULKING GUN



Technical details:

- Body and trigger in reinforced steel.
- Aluminium handle.
- No-drip function.
- Fitted out with a ladder hook.

AU Part #	BIZ-reference	For cartridges max. (ml)	Length (mm)	Weight (g)
BIZCC225	BIZ 710 214	310	230	480

ACCESSORY

GUN FOR CARTRIDGES AND INTUMESCENT FOAM NEW



Technical details:

- Body and trigger in reinforced steel.
- Aluminium handle.
- No-drip function.

AU Part #	BIZ-reference	For cartridges max. (ml)	Length (mm)	Weight (g)
BIZ710320	BIZ 710 320	330	400	800



MAINTENANCE AEROSOLS

GENERAL MAINTENANCE

MARKING PAINT NEW

BizLine Marking Paint is a quick drying, long lasting, highly durable spray marker used for writing and spot marking in a variety of applications including: landscaping, construction sites, surveying. Made in Australia.

Application(s):

Ideal for spotting or marking concrete, bitumen, grass, timber or soil.

Advice:

Inverted Handheld use only!

Technical documentation available on our website: SDS.



AU Part #	BIZ-reference	Color	Lifetime	Weight (g)
BIZ750170	BIZ 750 170	Blue	24 Months	300
BIZ750171	BIZ 750 171	Fluo yellow	24 Months	300
BIZ750172	BIZ 750 172	Fluo pink	24 Months	300
BIZ750173	BIZ 750 173	Fluo orange	24 Months	300
BIZ750174	BIZ 750 174	Fluo green	24 Months	300



HAND TOOLS

PLIERS 68

SCREWDRIVERS 71

SCREWDRIVERS SETS 74

CABLE CUTTERS 74

CABLE STRIPPERS 75

CRIMPING PLIERS 77

WRENCHES 79

CUTTING, SAWING AND FILING TOOLS 81

SOLDER TOOLS 84

MARKING TOOLS 84

MEASURING TOOLS 88

ELECTRICAL INSPECTION AND TESTING DEVICES 89

TOOL STORAGE 90

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

A PRODUCT RANGE TO ENSURE YOUR SAFETY!



Reminder about the use of 1000 V insulated tools

- Before any work involving high voltage, ensure you have appropriate equipment which complies with the standards in force: insulating gloves and protective screens.
- Check the markings on the tools.
- Store insulated tools separately in order to avoid mechanical damage.
- Visually check each tool before use. Replace the tool if it is nicked, cut or worn.

Tools compliant with IEC 60900:

Each tool is individually checked and undergoes the following tests:



Impact tests:

Tests carried out at 3 points of the insulating material after the tool has been at -25 °C for 2 hrs. It must not exhibit any cracking or tearing



Insulation coating adhesion test:

After 168 hrs in an enclosure at 70 °C, a force is exerted for 3 minutes to confirm the adhesion of the insulated portion on the steel. No separation or tearing must be observed.



Dielectric test:

After immersion in a trough of water for 24 hrs and drying, the tool is subjected to a voltage of 10 kV for 3 minutes between the metal and the insulated part. There must be no holing, breakdown or flashover during the test.



Resistance to flame-propagation test:

The tool is subjected to a flame for 10 seconds. The flame propagation is observed for 20 seconds and must not exceed a height of 120 mm.



Penetration test:

Test performed on the most vulnerable part of the tool, after 2 hrs in a chamber at 70 °C. A voltage of 5 kV is then applied for 3 minutes. No holing, no breakdown or flashover must be observed.



Individual serial test:

Every tool is visually inspected and subjected to a voltage of 10 kV for 10 seconds.

Marking compliant with standard IEC 60900:

- Product part number e.g. BIZ 790 026
- Year of manufacture e.g. 11 (for 2011)
- Symbol IEC 60900: 2004
- Double triangle with 1000 V indication showing compliance of the product with standard IEC 60 900





PLIERS

CUTTING PLIERS

**1000 V INSULATED REINFORCED
DIAGONAL CUTTING PLIERS** *Premium*

• Chrome-plating confers high resistance to corrosion.

**Technical details:**

- Chrome plated head.
- Multi-component grip.

> IEC 60900.



AU Part #	BIZ-reference	Length (mm)	Wt (g)	Flexible wire cutting capacity max Ø (mm)	Rigid wire cutting capacity max Ø (mm)	Piano wire cutting capacity max Ø (mm)	Cutting edge hardness (HRC)
BIZPROPSCHV200	BIZ 790 234	200	290	4,2	3	2,5	(64)

LONG NOSE PLIERS

**1000 V INSULATED HALF-ROUND LONG
NOSE PLIERS** *Premium*

• Chrome-plating confers high resistance to corrosion.

**Technical details:**

- Chrome plated head.
- Multi-component grip.

> IEC 60900.



AU Part #	BIZ-reference	Length (mm)	Wt (g)	Flexible wire cutting capacity max Ø (mm)	Rigid wire cutting capacity max Ø (mm)	Cutting edge hardness (HRC)
BIZPROPLNHV200	BIZ 790 231	200	190	2,5	1,6	60

WATER PUMPS AND LOCKING PLIERS

**1000 V INSULATED SLIP GROOVE-JOINT PLIERS****Technical details:**

- Box joint.
- Polished head.
- Multi-component grip.

> IEC 60900.



AU Part #	BIZ-reference	Length (mm)	Wt (g)	Adjustment positions	Opening Ø (mm)
BIZPAD250	BIZ 790 029	250	330	7	10-36

PLIERS

PLUG PLIERS



METAL PLUG RATCHET INSERTION TOOL **NEW**

**Application(s):**

Tool for inserting metal plugs in hollow materials 4 to 8 mm Ø.

- 5 notch ratchet to facilitate the expansion operation.
- Increased pulling stroke for saving time.



AU Part #

BIZ790200

BIZ-reference

BIZ 790 200

Wt (g)

542

Screw type

M4 M5 M6 M8

Pulling distance (mm)

30

CABLE TIE PLIERS

CABLE TIE PLIERS

**Application(s):**

For installation and cable ties from 3.6 to 9.5 mm wide and 1.3 to 2.3 mm thick.

Technical details:

- Spring lifetime 60,000 cycles.
- Body in carbon steel.

AU Part #

BIZ700010 / BIZ 700 010

STAINLESS STEEL CLAMP PLIERS

**Application(s):**

For fastening and cutting 4.5 to 12 mm wide stainless steel clamps.

AU Part #

BIZ790010 / BIZ 790 010



SCREWDRIVERS

1000 V INSULATED SCREWDRIVERS

THE DIFFERENT SCREWDRIVERS TIPS



SLOTTED



PHILLIPS®/PH



POZIDRIV®/PZ




SQUARE DRIVE

TORX®/
RESISTORX®POZIDRIV®/
SLOTTED

CHOOSING THE RIGHT SCREWDRIVER GUARANTEE AN OPTIMAL SCREWING!

A. WRONG:
Different screwdriver and screw tips.

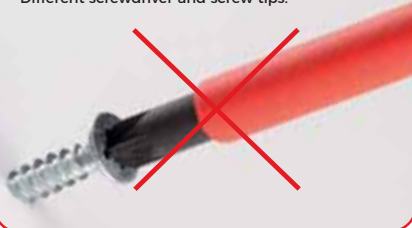

- Poor maintenance of the screw.
- Rapid wear of the screw head and screwdriver.
- Slow screwing, poor transmission of torque.

B. CORRECT:
Same screwdriver and screw tips.



- Maintaining optimal screw.
- Increased longevity of the screw head and screwdriver.
- Transmission of torque = screwing faster, optimized working time.

SCREWDRIVERS

1000 V INSULATED SCREWDRIVERS

A PRODUCT RANGE TO ENSURE
YOUR SAFETY! *Premium*



PRACTICAL, EASE OF USE, IMPROVED SAFETY, BETTER GRIP, INCREASED TIGHTENING TORQUE

1000 V

- ✓ • Fine non-slip sleeve:
 - > Increased comfort
 - > Practical for storage
 - > Foam in the handle



- ✓ • Thin blade Insulated 1000 V:
 - > Easy access to screws
 - > 100 % secure



- ✓ • Head symbol on end of sleeve:
 - > Ease of identification



iSLIM

- ✓ • Chrome vanadium steel:
 - > High quality
 - > High precision tip
 - > Excellent tightening performance



SCREWDRIVERS

1000 V INSULATED SCREWDRIVERS

1000 V I-SLIM SCREWDRIVERS *Premium*

Access to all screws guaranteed! High tightening torque!

Technical details:

- Shank in high quality chromium-molybdenum-vanadium steel.
- Bi-material grip in polypropylene and elastomer.
- Polypropylene insulation.



- Thin blade with built-in protection insulation for access to screws located deep down in electrical appliances.
- Soft elastomer grip adapting perfectly to the shape of all hands, and ensuring easy tightening.
- Smooth rounded tip for maximum comfort.
- Flats preventing the tool from rolling.
- Colored pattern symbol on the end of the grip for easy selection.



AU Part #	BIZ-reference	Tip	Length (mm)	Blade width (mm)
• BIZ790083	BIZ 790 083	Slotted	100	2,5
BIZ790070	BIZ 790 070	Slotted	100	3
BIZ790071	BIZ 790 071	Slotted	100	3,5
BIZ790072	BIZ 790 072	Slotted	100	4
BIZ790073	BIZ 790 073	Slotted	125	5,5
BIZ790074	BIZ 790 074	Slotted	125	6,5
BIZ790075	BIZ 790 075	PH1	80	4,5
BIZ790076	BIZ 790 076	PH2	100	6
BIZ790080	BIZ 790 080	Double print PZ2/Slotted	100	6
• BIZ790088	BIZ 790 088	Square	100	-
BIZ790089	BIZ 790 089	Square	125	-

1000 V INSULATED SCREWDRIVERS

**Technical details:**

- Chrome vanadium steel with blackening finishing.
 - Multi-component grip.
 - Polypropylene insulation.
- > IEC 60900.



- Ergonomic handle for better use and improved torque.
- Identification facilitated by the head being marked at the top of the handle.



AU Part #	BIZ-reference	Tip	Length (mm)	Blade width (mm)
BIZSSHV4100	BIZ 700 016	Slotted	100	4
BIZSPHV2100	BIZ 700 022	PH2	100	6

SCREWDRIVERS SETS

SCREWDRIVERS SETS

SET OF 6 1000 V INSULATED I-SLIM
SCREWDRIVERS SLOTTED/PH Premium NEW

Kit composed of:

- 1 i-SLIM slotted screwdriver 3.5 x 100 (BIZ 790071).
- 1 i-SLIM slotted screwdriver 4 x 100 (BIZ 790072).
- 1 i-SLIM slotted screwdriver 5.5 x 125 (BIZ 790073).
- 1 i-SLIM slotted screwdriver 6.5 x 125 (BIZ 790074).
- 1 i-SLIM PH1 screwdriver 4.5 x 80 (BIZ 790075).
- 1 i-SLIM PH2 screwdriver 6 x 100 (BIZ 790076).

> IEC 60900.



AU Part #

BIZ790082 / BIZ 790 082

CABLE CUTTERS

HAND CABLE CUTTERS

HEAVY-DUTY CABLE CUTTER



Technical details:

- Plastic coated handles.

Advice:

Do not use for cutting steel wires and cables.

AU Part #

BIZ-reference

Cable Ø maximum (mm)

Flexible copper cutting capacity
(cable cross-section) (mm²)

Length (mm)

Wt (g)

BIZ700001

BIZ 700 001

21

70

230

430

RATCHET CABLE CUTTERS

RATCHET CABLE CUTTER Ø 32 MM



Application(s):

For cables maximum Ø 32 mm.

For copper cable maximum section 150 mm².For aluminium cable maximum section 240 mm².

Advice:

Do not use for cutting steel wires and cables.

Always observe the cable Ø and maximum sections recommended.

Grease the blade drive mechanism regularly.



AU Part #

BIZ-reference

Cable Ø maximum (mm)

Cutting capacity maximum
(cable section) (mm²)

Length (mm)

Wt (g)

BIZ700011

BIZ 700 011

32

Cu 150/Al 240

254

770



CABLE CUTTERS

RATCHET CABLE CUTTERS

RATCHET CABLE CUTTER Ø 52 MM



Application(s):

For cables maximum Ø 52 mm.
For copper cable maximum section 300 mm².
For aluminium cable maximum section 400 mm².

Advice:

Do not use for cutting steel wires and cables.
Always observe the cable Ø and maximum sections recommended.
Grease the blade drive mechanism regularly.



AU Part #	BIZ-reference	Cable Ø maximum (mm)	Flexible copper cutting capacity (cable cross-section) (mm ²)	Length (mm)	Wt (g)
BIZ700202	BIZ 700 202	52	Cu 300/Al 400	335	1050

CABLE STRIPPERS

STRIPPING KNIVES

CABLE STRIPPERS KNIFE WITHOUT HOOKED BLADE



Application(s):

Circular and longitudinal stripping by self-swivelling blade.
For round cables 8 to 28 mm Ø.

Technical details:

- Adjustable stripping thickness.
- Self-swivel spare blade included in the tool's body.



AU Part #

BIZ790019 / BIZ 790 019

ACCESSORY

SPARE BLADE FOR STRIPPING KNIVES BIZ 790 019



AU Part #

BIZ790009 / BIZ 790 009

CABLE STRIPPERS

STRIPPING KNIVES

ADJUSTABLE CABLE STRIPPERS

**Application(s):**

Circular and longitudinal stripping by self-swivelling blade. For round cables.

Technical details:

- Adjustable stripping thickness.

AU Part #**BIZ700003****BIZ-reference****BIZ 700 003****Cable Ø (mm)**

4,5-25

ACCESSORY

SPARE BLADE FOR STRIPPING KNIVES
BIZ 700 003**Technical details:**

- Steel blade.
- Lifetime 2.000 cuts.

AU Part #**BIZ700085 / BIZ 700 085**

AUTOMATIC STRIPPING PLIERS

AUTOMATIC STRIPPING PLIERS 0.2 TO 6 MM²**Application(s):**

Strips wires of 0.2/0.5/0.75/1/1.5/2.5/4/6 mm².

AU Part #**BIZ700043****BIZ-reference****BIZ 700 043****Stripping capacity**0,2-6 mm²

AUTOMATIC STRIPPING PLIERS



• Gun shape suited to regular stripping operations.

**Application(s):**

For stripping round wires and cables of a 0.2 to 6 mm² section.

Technical details:

- Stripping length adjustment stop from 6 to 15 mm.
- Fitted with a wire cutter (2.5 mm² maximum).

AU Part #**BIZ790017****BIZ-reference****BIZ 790 017****Stripping capacity**0,2-6 mm²



CRIMPING PLIERS

TERMINALS AND CABLE ENDS CRIMPING PLIERS

SQUARE TERMINAL CRIMPING
PLIERS *Premium* **NEW****For crimping up to 16 mm²!****Application(s):**To crimp insulated and non insulated lugs from 0.08 to 16 mm².**Technical details:**

- Bimaterial grip.
- Burnished finish.

Instructions:Lift and turn the thumb wheel to crimp up to 16 mm².

- A single die to crimp lugs from 0.08 to 16 mm².
- The die adjusts automatically to the lug crimped.



AU Part #	BIZ-reference	Applications	Section (mm ²)	Length (mm)	Wt (g)
BIZ790011	BIZ 790 011	Insulated and uninsulated terminals	0,08-16	180	420

TERMINALS AND CABLE ENDS CRIMPING
PLIERS**Technical details:**

- Multi-component grip.
- Length: 229 mm.
- Weight: 570 g.

Advice:

To crimp pre-insulated terminals and cable ends, place the wire next to the color identification on the die.

The dies are not sold separately.

AU Part #	BIZ-reference	Applications	Section (mm ²)	Wt (g)
BIZCRP00506	BIZ 700 005	Pre-insulated terminals and sleeves	0,5-6	570
BIZCRB0616	BIZ 700 009	Insulated and non-insulated cable ends	6-16	570

CRIMPING PLIERS

CRIMPING PLIERS FOR COPPER TERMINALS LUGS AND SLEEVES

CRIMPING PLIERS FOR COPPER TERMINAL LUGS AND SLEEVES **NEW**

Hexagonal crimping. Complies with NFC 20-130 (LCIE test report available on request).

Not suitable for crimping aluminium parts.

Technical details:

- Jaw material: carbon steel chrome.
 - Handles material: plastic coated.
- > NFC 20-130



AU Part #	BIZ-reference	Applications	Section (mm ²)	Length (mm)	± (kg)
BIZ700012	BIZ 700 012	Copper terminals lugs and sleeves	6/10/16/25/35/50	520	2
BIZ700013	BIZ 700 013	Copper terminals lugs and sleeves	6/10/16/25/35/50/70/95/120	660	3,5

ACCESSORY

SPARE MATRICES FOR COPPER TERMINAL LUGS AND SLEEVES **NEW**

Supplied in pairs.

Technical details:

- Dies material: carbon steel chrome finish.



AU Part #	BIZ-reference	Applications	Section (mm ²)
BIZ700273	BIZ 700 273	For crimping pliers BIZ 700 012	6/10/16/25/35/50
BIZ700274	BIZ 700 274	For crimping pliers BIZ 700 013	6/10/16/25/35/50/70/95/120



WRENCHES

RATCHET WRENCHES

REVERSIBLE RATCHET POLYGONAL WRENCHES

Practical! Multiple-size ratchet wrenches!10-13
17-19
mm*Premium*

BIZ 790 202

Extra-flat wrench, handy for locations where access is difficult



Full control of the direction of rotation though the 72 built-in reversal levers.

REVERSIBLE RATCHET RING WRENCH 4 SIZES **NEW****1 wrench = 4 sizes!**Dimensions: 10/13/17/19 mm.
Built-in reversing levers.**Technical details:**

- 72 teeth mechanism.
- 5° increments.
- Chrome vanadium steel.
- Mirror finish.



AU Part #	BIZ-reference
BIZ790202	BIZ 790 202

Dimensions (mm)
10/13/17/19

Length (mm)
230

Wt (g)
290

ADJUSTABLE WRENCHES

ADJUSTABLE WRENCHES

**Technical details:**

- Chrome vanadium steel.
- Burnished thumb wheel and head.



AU Part #	BIZ-reference
BIZAW150	BIZ 700 183
BIZAW300	BIZ 700 059

Jaw opening (mm)
24
38,5

Length (mm)
150
300

Wt (g)
155
770

ADJUSTABLE RATCHET SPANNER



• Save time!

**Tighten/Loosen more easily!****Technical details:**

- Chrome molybdenum steel.
- Multi-component grip.



AU Part #	BIZ-reference
BIZPROAWR250	BIZ 700 598

Jaw opening (mm)
32


Length (mm)
250

Wt (g)
565

WRENCHES

HEXAGON KEYS

9 BALL-POINT HEX KEY CLIP SET NEW



AU Part #

BIZ700230 / BIZ 700 230




Dimensions: 1.5/2/2.5/3/4/5/6/8/10 mm.
Supplied in a folding case for storage.

Technical details:

- Chrome Vanadium steel.
- Anti-rust burnished.
- Weight with sleeve: 430 g.

• Easy tightening even in confined spaces with long stem and ball point.



SET OF 9 HEXAGONAL KEYS



AU Part #

BIZ700063 / BIZ 700 063



Dimensions: 1.5/2/2.5/3/4/5/6/8/10 mm.
Supplied in a folding case for storage.

Technical details:

- Chrome vanadium steel.
- Anti-rust burnished.
- Weight with sleeve: 430 g.



ELECTRICAL CABINET KEYS

UNIVERSAL KEY NEW



AU Part #

BIZ790194 / BIZ 790 194



- Containing:
- Square (5, 6, 7-8 mm),
 - Triangle (7, 8-9 mm and 10-11 mm),
 - Bit-key (3-5 mm),
 - Half-moon (6 mm).

- Central square 5 mm to bleed radiators.
- With chain with a spring hook to attach it to the belt.



FOLDABLE CONTROL CABINET KEY NEW



AU Part #

BIZ790211 / BIZ 790 211



1 key only for 10 closures!

- composed of:
- Square (5/6-7/8-9 mm).
 - Triangle (5-6/6-7/8-9 mm).
 - Key bit (3-5).

- Direct reading of dimensions on each key.
- With central square size 5 to bleed the radiators.

Technical details:

- 10 different access to technical closings.
- Handy 360° rotation system.
- With fastening clip to keep the tool handy.
- 2 magnetized housings for 1/4" bits and socket.
- Nickel treatment of rotating axes.



CUTTING, SAWING AND FILING TOOLS

UTILITY KNIVES

18 MM AUTOMATICALLY RELOADING UTILITY KNIFE **NEW**

Supplied with 3 blades (1 mounted + 2 in handle storage).
Blade width 18 mm snaps into 8 sections.

Technical details:

- Multi-component grip.
- Metal blade guide with built-in blade snapper.
- Self-blocking blade.



- Blade locking system on the back for difficult jobs.
- Automatic blade loading.
- Excellent grip thanks to bimaterial handle.



AU Part #

BIZ700187 / BIZ 700 187

ACCESSORY

SET OF 10 BLADES FOR UTILITY KNIFE BIZ 700 187 **NEW**

Protection container with 10 blades.

Technical details:

- Carbon steel.
- Blade snaps into 8 sections.



AU Part #

BIZ-reference

Quantity of blades

Blade width (mm)

Blade thickness (mm)

Length (mm)

BIZ700188**BIZ 700 188**

10

18

0.5

100

RETRACTABLE UTILITY KNIFE WITH INTERCHANGEABLE BLADE **NEW**

Supplied with 1 trapezoidal blade.
Non-snapping 2-position trapezoidal blade.

Technical details:

- Zinc alloy body.
- Blade maintained when used by pressing the trigger.
- Blade retracts when trigger is released at the end of application.

Advice:

Safer with retractable blade.



AU Part #

BIZ700040 / BIZ 700 040

CUTTING, SAWING AND FILING TOOLS

UTILITY KNIVES

FOLDING CUTTER *Premium* **NEW**

Practice: blade change in 3 seconds!

Ergonomic and light aluminium folding utility knife.

Technical details:

- Blade holder in high precision machined stainless steel: secures the blade during straight cuts.



- Thumb gard for better control and secure cutting action.
- Single-handed use with its push button with locking system.
- Belt clip.



AU Part # BIZ700328 / BIZ 700 328

ACCESSORY

SET OF 10 TRAPEZOIDAL BLADES FOR UTILITY KNIVES BIZ 700 040 AND BIZ 700 328 **NEW**

Supplied in protective case containing 10 blades.

Technical details:

- Carbon steel.
- Trapezoidal blade for use in both directions.
- Non-snapping blades.



AU Part #	BIZ-reference	Quantity of blades	Blade thickness (mm)	Length (mm)	Blade width (mm)
BIZ700178	BIZ 700 178	10	0,6	55	19

SCISSORS AND SHEARS

ELECTRICIAN'S KNIFE **NEW**

2-blades knife (1 hooked and 1 straight).

Technical details:

- Black ABS handle.

- Thumb gard for better control and secure cutting action.
- Single-handed use with its push button with locking system.
- Belt clip.

AU Part # BIZ700115 / BIZ 700 115

CABLE SHEARS "CROCO"



The essential tool!

Application(s):

For cutting electrical cables (type H07), tubes, wiring ducts and retainers, cardboard, etc.

Technical details:

- 42 mm toothed polished stainless steel blade.



- Light and easy to use thanks to return spring.
- Safety clips into closed position.



AU Part #	BIZ-reference	Length (mm)	g (g)
BIZPROCROS180	BIZ 700 524	190	120



CUTTING, SAWING AND FILING TOOLS

SCISSORS AND SHEARS

PVC PIPE SHEARS

**Application(s):**

For cutting conduits suitable for PVC rigid or flexible conduit pipes and similar materials (PP, PE and PB).
Max. cutting capacity 42 mm (tubes and conduits) and 40 x 12.5 (mini trunking).

Technical details:

- Reinforced structure with 2 material handle.
- Stainless steel blade.
- Safety clips in closed position.
- Ratchet.

AU Part #	BIZ-reference	Length (mm)	Weight (g)
BIZ790037	BIZ 790 037	155	470

ACCESSORY

SPARE BLADE FOR PVC PIPE SHEARS
BIZ 790 037

AU Part # **BIZCCT042B / BIZ 790 038**

SAWS

30 CM HACKSAW



- 45° and 90° cutting angles.
- Blade tension adjustment.



Delivered with 3 24-teeth HSS bi-metal blades per thumb.

Application(s):

Cuts wood and metal.

Technical details:

- Aluminium frame with elastomer handle.
- Blade length: 300 mm.
- Supplied with 3 HSS bi-metal blades, 24 teeth per inch.

AU Part # **BIZ700035 / BIZ 700 035**

ACCESSORY

SET OF 10 SAW BLADES

**Technical details:**

- HSS bi-metal, 24 teeth per inch.

AU Part #	BIZ-reference	Thickness (mm)	Length (mm)	Width (mm)
BIZ700036	BIZ 700 036	0,63	300	12,5

PADSAW FOR DRYWALLS

**Technical details:**

- Carbon steel blade, 1.2 mm thick.
- Wooden handle with suspension hole.
- Length: 160 mm.

AU Part # **BIZPST150 / BIZ 700 175**

SOLDER TOOLS

GAS SOLDERING IRON **NEW****Technical details:**

- Equivalent power: 30-125 W.
- Bit temperature: 250-550 °C.

Instructions:

Heating time: 15 seconds.

- Gas canister (38 ml for a use during 3 hours and a half average).
- Blow torch function for heatshrink tubes; simply undo the metal ring.

AU Part #

BIZ700212 / BIZ 700 212

ACCESSORY

SPARE TIP WITH 1.6 MM POINT **NEW****Technical details:**

- Tip 1.6 mm Ø.

AU Part #

BIZ700460 / BIZ 700 460

MARKING TOOLS

PICA DRY GRAPHITE LEAD PENCIL **NEW****Temporary marking of all surfaces!**

Supplied with 1 graphite lead.

Application(s):

For marking and writing on all surfaces and materials. Ideal for surfaces which are rough, dusty, humid, oily, dark, etc.

Technical details:

- Telescopic lead pencil.
- Lead protected by a cap.
- Cap contains a sharpener.

- Erasable marking on all smooth surfaces with damp cloth.
- Ideal for drill holes and confined spaces.

AU Part #

BIZ790214 / BIZ 790 214

ACCESSORY

SPARE LEADS FOR BIZ 790 214 **NEW**

Box of 10 graphite leads.

AU Part #

BIZ-reference

Color

Package Quantity

BIZ790212**BIZ 790 212**

Red/yellow/black

8

BIZ790215**BIZ 790 215**

Black

10



MARKING TOOLS

100 % INNOVATION
For all surfaces and all applications!

New generation of wax pencils



Permanent marking on all types of dry surfaces.



BIZ 780 853

With red refill lead.



The marker for difficult access Pica Ink



Permanent marking on all types of dry surfaces.



With telescopic tip
Adjustable and 180° reversible for repeated use!



White marker which allows immediate writing



No need to shake or prime for permanent marking on smooth or porous surfaces.



Water based permanent ink.



Pica Dry graphite lead pencil



Graphite lead for temporary marking of all surfaces.



With graphite or coloured replacement leads!

BIZ 790 212 et BIZ 790 215

• **For large-scale marking needs:**
Black all-surface permanent marker.



BIZ 780 205

MARKING TOOLS

PICA INK BLACK MARKER DEEP HOLES **NEW**

• Tip swivels over 180° for a 2nd life!

**Special for difficult access**

Very fine tip marker.

Application(s):

Permanent marking on all dry surfaces.

Technical details:

- Telescopic tip in stainless steel Ø 1.5 mm.
- 'Quiver' cap.

Advice:

To prevent the product from drying, push the marker properly in the quiver cap (up to the yellow line).



AU Part #

BIZ780428 / BIZ 780 428

SPECIAL CABLE BLACK MARKER **NEW**

• Dries in 2 seconds!

**Special for marking!**

Permanent marking, quick drying, resists to water and light.

Application(s):

For marking electric cables, cable ties and cable labels.

Technical details:

- Tip Ø: 0.7 mm.



AU Part #

BIZ780204 / BIZ 780 204

SPECIAL CABLE WHITE MARKER **NEW****Ideal for marking cables and strips**

• Very easy top use: remove the cap and write!



Permanent marking, quick drying, resists to water and light.

Application(s):

Writes on all types of materials such as plastic, metal, glass, or cardboard.

Technical details:

- Tip Ø: 1 mm.



AU Part #

BIZ780399 / BIZ 780 399

MARKING TOOLS

LARGE BLACK MARKING PEN **NEW**

• 'Dry-safe': marks up to 14 days without cap.

**For wide lines!**

Black permanent marker resistant to water and abrasion with quick drying.

Application(s):

All surfaces (smooth or porous).

Technical details:

- Wide tip 1 to 4 mm Ø.
- Free of xylene and toluene.



AU Part #

BIZ780205 / BIZ 780 205

WAX CRAYON PICA VISOR PERMANENT **NEW**

• Never dries.



Red wax holder pen for permanent marking.

Application(s):

For marking all types of surfaces, dry or humid, smooth or rough, dusty or oily.

Technical details:

- Rotating mechanism.
- Handy "quiver" cap.
- Lead Ø: 10 mm.



AU Part #

BIZ780852 / BIZ 780 852

ACCESSORY

SPARE LEADS FOR PICA VISOR
BIZ 780 852 **NEW**

Plastic set of 4 red wax spare leads.
Color: red.



AU Part #

BIZ780853 / BIZ 780 853

MEASURING TOOLS

LEVELS

ELECTRICIAN'S MAGNETIC POCKET LEVEL 7 CM



1 horizontal vial.

Application(s):

For the quick alignment of flush switches and sockets.

Technical details:

- Plastic body.
- Rare earth magnet.

- Base plate allowing to position the level on the edge of switches or sockets.
- Magnet 5 times more powerful than a typical ferrite magnet.

AU Part #	BIZ-reference	Precision (mm/m)	Length (mm)	± (g)
BIZ700386	BIZ 700 386	1	70	50

MAGNETIC LEVEL 23 CM **NEW****Application(s):**

Dual-view of vertical level for fast, accurate readings.

Lower magnetic foot adheres to metal surfaces.

Technical details:

- Comprising 3 easy to read level vials (horizontal, vertical, 45°).
- Magnetic.
- Robust rubber ends.
- Reinforced plastic body.

- Lower magnetic foot adheres to metal surfaces.
- Dual-view of vertical level for fast, accurate readings.

AU Part # • BIZ700335 / BIZ 700 335

PRO MAGNETIC LEVEL 23 CM **NEW****Application(s):**

Dual-view of vertical level for fast, accurate readings.

Lower magnetic foot adheres to metal surfaces.

Technical details:

- Metallised level with corrosion-resistant paint.
- Comprises 4 level vials set with epoxy: vertical plumb site, horizontal, 45° and 30° levels.

- Rare-earth magnets, high quality materials for better fixing.
- V-shaped groove to allow measurements for pipes and pipework for fixing.
- Drilling holes marked every 71 mm in accordance with standard DIN 49075.



AU Part # • BIZ700336 / BIZ 700 336



MEASURING TOOLS

LEVELS

MAGNETIC LEVEL 25 CM



3 vials: horizontal, vertical, and 45° angle.

Technical details:

- Reinforced plastic body.
- Vials machined in shock-resistant acrylic.
- Fluorescent liquid resistant to UV radiation.

- Dual-visibility of vertical levelling for easy and precise reading.
- Base magnetic along the whole length for adhesion on metallic surfaces.



AU Part #

BIZ-reference

Length (mm)

⚖ (g)

• BIZ700206

BIZ 700 206

250

140

TAPE MEASURES 8 M **NEW**



Technical details:

- ABS case with silicone reinforced coating.
- Front- and reverse-face printed tape - class II - EC Standard.
- Nylon-coated steel tape, non-reflecting and water-resistant.
- Magnetic tape end-piece.
- Tape self-locking system and automatic return.
- Stainless steel rivets.
- Internal measurements by adding case dimensions.
- Belt clip.

- Shock-absorbent case.
- Magnetic end-piece for easier measurements.
- Tape self-locking system.



AU Part #

• BIZ790062 / BIZ 790 062

ELECTRICAL INSPECTION AND TESTING DEVICES

VOLTAGE TESTER SCREWDRIVERS

SET OF TWO VOLTAGE TESTERS



Set contains:


- 1 voltage tester 140 mm, 100-250 V.
 - 1 voltage tester 190 mm, 100-250 V.
- With pocket clip.

AU Part #

BIZ700031 / BIZ 700 031

TOOL STORAGE

TOOL BAGS

ELECTRICIAN WOVEN BAG **NEW****NEW**Electrician's
woven bag**LARGE TOOL BAG****BIZ700226**

Length (mm)	440
Width (mm)	230
Height (mm)	320
Weight (Kg)	2
Volume (Kg)	0,032

- Tool bag with **large central pocket**.
- **Reinforced floor** and **zip fastening**.
- Supplied with **shoulder strap**.
- **600 denier** polyester.

Tools not included.

AU Part #

BIZ-reference

BIZ700226**BIZ 700 226**

Length (mm)

440

Width (mm)

230

Height (mm)

320



TOOL STORAGE

TOOL BAGS

TOOLS BACKPACK **NEW****NEW**

With removable
tool holder panel!

TOOLS BACKPACK**BIZ790519**

Length (mm)	370
Width (mm)	175
Height (mm)	460
Weight (Kg)	2,35

Tools not included.

- Carried on the back or by hand using the **two handles**.
- Tool panel with **4 storage faces**, each fitted with **8 pockets and 10 pen and/or screwdriver slots**.
- **Large interior compartment** with zipper.
- **Reinforced pack base** to lay it on the ground open or closed for permanent access to the tools.
- **Comfortable** with padded back and shoulder straps.
- **Ergonomic** thanks to appropriate tool distribution on the level of the back.
- **Cell phone and water bottle compartments**.

AU Part #	BIZ-reference	Length (mm)	Width (mm)	Height (mm)	⚖ (kg)
BIZ790519	BIZ 790 519	370	175	460	2,35

TOOL STORAGE

TOOL BAGS

+ Practical + Comfortable

✓ Detachable tool holder panel with 4 storage faces



✓ Carrying handles:
 > Continuous access to tools
 > + practical



✓ Water resistant:
 > Rigid water-tight base



✓ Ergonomically designed:
 > Weight of tools well distributed across back



TOOL STORAGE

TOOL BAGS

"LA COSTABELLE" TOOL BAG **NEW****NEW**Supplied with
shoulder strap."LA COSTABELLE"
TOOL BAG

BIZ700229



Length (mm)	420
Width (mm)	205
Height (mm)	264

- **Plastic floor.**
- **Removable soft top.**
- With multiple inside/outside **pockets.**
- **Side fixing loops for bulky tools** (levels, saws, drawings, etc.).
- Small parts **storage box.**
- With **foam-covered steel carry handle.**
- **600 denier polyester.**

Tools not included.

AU Part #	BIZ-reference
BIZ700229	BIZ 700 229

Length (mm)	Width (mm)	Height (mm)
420	205	264

TOOL STORAGE

TOOL BAGS

TECHNICIAN TOOL BAG

Round bucket tote bag with rigid sides.

Technical details:

- Padded grip makes carrying a heavy load more comfortable.
- Multi-use pockets to organize a wide range of tools and accessories.
- Adjustable shoulder strap can be hooked to metal clasps for carrying heavier loads.

• Removeable baffle-board to separate the bag into two compartments.



AU Part #

BIZTBT290

BIZ-reference

BIZ 390 574

Length (mm)

290

POUCH ELECTRICIAN

Technical details:

- Big wide open pocket for tools.
- 7 front small pockets for small accessories.
- Tape holder.



AU Part #

BIZTPEHD / BIZ 390 572



TOOL STORAGE

TOOL BOXES

MAINTENANCE TOOL BOX **NEW**



Supplied with a mobile tool holder.
Mobile storage case in the lid.
Padlocking option (padlock not included).
No tools included.

Technical details:

- Material: base in reinforced polypropylene (PP) and polycarbonate storage kit lid (PC).
- Metal wire hinges.
- Wide metal fasteners.
- Safe and comfortable aluminium handle.
- Soft protection bumpers at corners.
- Colors: black and grey.

- The storage kit is equipped with mobile separators forming adaptable multi-purpose compartments.
- The polycarbonate lid is highly resistant to impacts.



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Height (mm)	Lockable	Working load limit (kg)
BIZ790529	BIZ 790 529	556	278	245	Yes	30

"HEAVY DUTY" TYPE PROFESSIONAL TOOL BOX 21" **NEW**

Supplied with a mobile 2/3 tool holder (trolley).
Padlocking option (padlock not included).
No tools included.

Technical details:

- Material: reinforced polypropylene (PP).
- Metal wire hinges.
- Wide metal fasteners.
- Ergonomic and comfortable bi-material handle.
- "V" groove on the lid for secondary cutting.
- Color: black.

- Thanks to its seal, the box is splashproof and dustproof.
- The 2/3 tool holder leaves room to store larger tools.



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Height (mm)	Lockable	Maximum load (kg)
BIZ790530	BIZ 790 530	535	288	254	Yes	30

TOOL STORAGE

TOOL BOXES

STACKABLE ORGANIZER 60 MM DEPTH NEW

Storage case with side fasteners allowing several cases to be assembled together. Equipped with 9 removable receptacles. Can be locked using a padlock (not provided). Supplied empty.

Technical details:

- Material: compartments and storage body made of polypropylene (PP) and cover made of polycarbonate (PC).
- Metal wire hinges.
- Wide metal fasteners.
- Comfortable dual-material handle.
- Corners protected by soft bumpers.
- Colors: black and red.

- Water and dust-resistant case ensured by seal.
- Transparent ultra-resistant polycarbonate cover for instantaneous view of contents with recesses for location of compartments.



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Height (mm)	Lockable	Maximum admissible load (kg)
BIZ790531	BIZ 790 531	455	375	80	Yes	20

ORGANIZER 100 MM DEPTH NEW

Equipped with 9 removable trays. Supplied empty.

Technical details:

- Material: tray and compartments made of polypropylene (PP) and cover made of polycarbonate (PC).
- Metal wire hinges.
- Wide metal fasteners.
- Dual-material retractable handle for improved comfort.
- Colors: black and red.

- Transparent ultra-resistant polycarbonate cover for instantaneous view of contents with recesses for location of compartments.



AU Part #	BIZ-reference	Length (mm)	Width (mm)	Height (mm)	Lockable	Maximum admissible load (kg)
BIZ790532	BIZ 790 532	432	360	125	Yes	30



TOOL STORAGE

TOOL CASES

MASTER ROLL TOOL CASE **NEW**



Tool case on wheels with telescopic handle.
Including two tool pallets.
Storage in reinforced rubber racks and elastic bands.
Removable tool pallets and adaptable bottom storage.
Key lockable (set of two keys).
Contents non-included.

Technical details:

- Body in polypropylene plastic.
- Aluminium frame.
- High strength rubber carrying handle.

- Polypropylene injection ensures constant body thickness while guaranteeing high shock resistance.
- The rubber blade racks ensure the tools are well maintained.


AU Part #
BIZ790503
BIZ-reference
BIZ 790 503
Depth (mm)

260

Width (mm)

475

Height (mm)

390

Weight (kg)

6

Maximum load (kg)

25

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

 POWER TOOLS AND
CONSUMABLES

 SITE AND WORKSHOP
EQUIPMENT

 PROTECTION,
SAFETY AND SIGNS

PLUMBING



POWER TOOLS AND CONSUMABLES

HEAT GUN

100

DRILL BITS

101

HOLE SAWS ACCESSORIES

103

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

HEAT GUN

GAS HOT AIR GUN



Gas stripper allowing full mobility in use with new patented flame-retention technology to ensure safe operation. Supplied with the following accessories:

- Deflection nozzle.
- Reduction nozzle.
- Feet for vertical support.

Delivered without gas charge.

Application(s):

For heating heat-shrink sleeving, plastic and rubber sleeves. For plumbing work such as soldering of copper pipes, or for thawing frozen pipework, etc. For stripping and drying paintwork on wood surfaces.

Technical details:

- Temperature: 550 °C (maximum).
- Maximum cartridge capacity: 100 g butane gas.
- 3 hrs stand-alone operation per full recharge.

Instructions:

1. Assemble the gun and the cartridge by screwing both parts together.
2. To start using the torch, turn the thumb wheel on the top towards "+" by a quarter turn and press the switch.
3. To turn off the torch, turn the thumb wheel on the top towards the "-" as far as possible.



DRILL BITS

STANDARD MASONRY DRILL BITS

MASONRY DRILL BITS



Application(s):

Suitable for drilling into masonry materials.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)	Useful length (mm)	Quantity
BIZMDB5	BIZ 399 157	5	85	50	Per unit
• BIZMDB5.5	BIZ 399 158	5,5	85	50	Per unit
BIZMDB6	BIZ 399 159	6	100	60	Per unit
BIZMDB6.5	BIZ 399 160	6,5	100	60	Per unit

HAMMER DRILL BITS



Application(s):

Suitable for drilling into masonry materials.

Suitable for any rotary hammer drill taking SDS or SDS+ drill bits.


Technical details:

- Double flute design ensuring efficient removal of dust.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)	Useful length (mm)	Quantity
BIZHDS110	BIZ 399 109	5	110	45	Per unit
BIZHDS160	BIZ 399 110	5	160	90	Per unit
BIZHDS5160	BIZ 399 112	5,5	160	90	Per unit
BIZHD6110	BIZ 399 113	6	110	45	Per unit
BIZHD6160	BIZ 399 114	6	160	90	Per unit
BIZHD65110	BIZ 399 115	6,5	110	45	Per unit
BIZHD65160	BIZ 399 116	6,5	160	90	Per unit
BIZHD8160	BIZ 399 118	8	160	90	Per unit
BIZHD10160	BIZ 399 100	10	160	90	Per unit
BIZHD12160	BIZ 399 102	12	160	90	Per unit
BIZHD16460	BIZ 399 106	16	460	365	Per unit
BIZHD20600	BIZ 399 107	20	600	500	Per unit
BIZHD25260	BIZ 399 108	25	260	185	Per unit

SDS+ HAMMER DRILL BITS "XTREME"
4 CUTTING EDGES - UNITS *Premium* **NEW**

Ideal for reinforced concrete!



- One-piece carbide tip with four cutting edges.
- Centring point.
- Quadruple helix and cylindrical body for quick removal of dust.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)	Useful length (mm)
BIZ700651	BIZ 700 651	5	160	100
• BIZ700658	BIZ 700 658	5,5	160	100
BIZ700653	BIZ 700 653	6	160	100
BIZ700655	BIZ 700 655	8	160	100
BIZ700656	BIZ 700 656	10	160	100
BIZ780071	BIZ 780 071	12	160	100
BIZ780080	BIZ 780 080	12	260	200
BIZ780087	BIZ 780 087	20	450	400
BIZ780089	BIZ 780 089	25	450	400

DRILL BITS FOR WOOD

HIGH SPEED STEEL DRILL BITS



Application(s):

Suitable for drilling metal, wood and plastic.

Technical details:

- Fully ground finishing for fast chip removal.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)	Useful length (mm)	Quantity
BIZHSS2.5	BIZ 399 129	2,5	57	30	1
BIZHSS3	BIZ 399 130	3	61	33	1
BIZHSS3.5	BIZ 399 131	3,5	70	39	1
BIZHSS4	BIZ 399 132	4	75	43	1
BIZHSS4.5	BIZ 399 133	4,5	80	47	1
BIZHSS5	BIZ 399 134	5	86	52	1
BIZHSS5.5	BIZ 399 135	5,5	93	57	1
BIZHSS6	BIZ 399 136	6	93	57	1
BIZHSS6.5	BIZ 399 137	6,5	101	63	1
BIZHSS8	BIZ 399 139	8	117	75	1
BIZHSS10	BIZ 399 122	10	133	87	1
BIZHSS10.5	BIZ 399 123	10,5	133	87	1
BIZHSS12	BIZ 399 125	12	151	101	1
BIZHSS13	BIZ 399 127	13	151	101	1

CERAMIC TILE DRILL BITS NEW



Use without drilling template.



The drilling solution for the toughest tiles!

Application(s):

For extremely hard tiles in vitrified clay up to Mohs/Ritz level 9 hardness, as well as glass and porcelain.

Technical details:

- Accurate centring with the diamond sharpened carbide plate.

Instructions:

- Handy direct use drill bits: no cooling required.
- Do not exceed the max spindle rotation speed of 200 rpm.
- Do not use with impact drills.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)
BIZ709990	BIZ 709 990	6	115
BIZ709991	BIZ 709 991	8	120
BIZ709992	BIZ 709 992	10	120

DRILL SET



25 pieces drill set with all the popular sizes (1-13 mm x 0.5 mm). HSS.

AU Part #	BIZ-reference	Quantity
BIZHSSDSM25	BIZ 399 142	1

DRILL BITS FOR WOOD

ISO AND PG STEP DRILL BIT NEW



Special for electricians!

Compatible with PG and ISO.
12 laser marked steps.
Three flats milled on Ø 10 mm shank to prevent slipping in the chuck.

Application(s):

Drills through meta sheet up to 2 mm thick.
For drilling non-ferrous metals, stainless steel and synthetic materials up to 4 mm thickness.

Technical details:

- Hexagonal shank 10 mm Ø.
- 5 % cobalt HSS steel.
- Helix flutes.
- Cross shaped sharpening.

Advice:

Use cutting oil to extend the tool's lifetime.

- Fast chip evacuation by helix flute increases cutting capacity.
- 5 % cobalt steel for constant drilling temperature and for long life.
- Drilling accuracy with offset point.



AU Part #	BIZ-reference	Drilling Ø (mm)	Shank Ø (mm)	Hardness (HRC)	Numbers of floors
BIZ700095	BIZ 700 095	6,5-32,5	10	65-66	12

SPADE BITS



New design with improved cutting profile

Technical details:

- Hardness: 48-54 HRC.
- Material: carbon steel.

AU Part #	BIZ-reference	Ø (mm)	Total length (mm)	Useful length (mm)	Shank dimension (mm)	Tip	Shank	Material	Quantity
BIZ399175	BIZ 399 175	16	152	112	6,35	Self centring tip	1/4" hex	Carbon Steel	Per unit
BIZ399176	BIZ 399 176	20	152	112	6,35	Self centring tip	1/4" hex	Carbon Steel	Per unit
BIZ399177	BIZ 399 177	22	152	112	6,35	Self centring tip	1/4" hex	Carbon Steel	Per unit
BIZ399178	BIZ 399 178	25	152	112	6,35	Self centring tip	1/4" hex	Carbon Steel	Per unit
BIZ399179	BIZ 399 179	32	152	112	6,35	Self centring tip	1/4" hex	Carbon Steel	Per unit

HOLE SAWS ACCESSORIES

SHAFTS FOR BI-METAL HOLE SAWS STANDARD



Technical details:

- Hexagonal shank.
- Fitted with a 6.35 mm Ø HSS pilot drill and length 80 mm.



AU Part #	BIZ-reference	Applications
BIZHSA1430	BIZ 700 896	For hole saws 14 to 30 mm Ø
BIZHSA32210	BIZ 700 897	For hole saws 31 to 210 mm Ø



SITE AND WORKSHOP EQUIPMENT

DISPENSER REELS	106
DRAW-WIRES AND ACCESSORIES	107
CABLE ACCESS ROD AND ACCESSORIES	114
MULTI-WAY EXTENSION LEADS	115
EXTENSION CORDS	115
ELECTRICAL CONNECTION	117
SITE LIGHTING	118
CLEANING EQUIPMENT	118
STOWAGE	119



DISPENSER REELS


DRUM ROLLERS

FOLDING DRUM ROLLER **NEW**

Multipurpose, practical and compact!

Application(s):

Ideal for the storing and dispensing drums of cable for warehouse and vans or for cable and wire preparation. The steel structure assure a good durability.



- Spring loaded adjustable rollers securely hold different cable drum sizes and it has clamps to prevent sideways movement.
- Ramp entry and exit eases the loading and unloading of drums onto the rollers themselves.

AU Part #	BIZ-reference	Maximum load (kg)	Drum roller dimensions (mm)	Drum roller weight (kg)	Drum Ø (mm)	Maximum drum width (mm)
BIZ700275	BIZ 700 275	150	564 x 500 x 82	6,25	300-1050	530

DRUM ROLLER STAND **NEW**

Compact, design and portable!

Application(s):

Ideal for the storing and dispensing drums of cable for warehouse and vans or for cable and wire preparation.

Technical details:

- Drum roller stand dimensions (closed): length 575 x width 110 x height 150 mm.
- English-style folding for easier rotation of the drum.

Advice:

1. Pay proper attention to the position of the stand and the recommended pulling method.
2. Unroll several metres from drums which are over-filled before placing them on the drum stand.



- Two separate stand parts which can be packed together like a suitcase with a handle for carrying to site.

AU Part #	BIZ-reference	Maximum load (kg)	Drum roller weight (kg)	Drum Ø (mm)
BIZ700207	BIZ 700 207	300	10	1030



DRAW-WIRES AND ACCESSORIES

PULL-WIRES - SMALL

	Steel-Nylon 	Steel-Nylon 	Steel-Nylon 	Fiberglass 	Single Stranded Polyester 	
Reference	BIZ700233 BIZ700234	BIZ700235 BIZ760000	BIZ700251	BIZ700230	BIZ760011	
Application	Residential Small commercial work	Public works Industry	Public works Industry	Roofing Commercial	Residential Small commercial work	
Threading	M5	M5	M12	/	/ Crimped terminals	
PASS THE PULL-WIRE	pull-wire diameter 	4 mm	6 mm	10 mm	5 mm	3 mm
	easy insertion into the sheath 	★★★★☆	★★★☆☆	★★★☆☆	★★★★★	★★★★☆
	Ø ideal pipe 	Ø 20-32 mm	Ø 50-90 mm	Ø 90-140 mm	Ø 16-50 mm or without pipe	Ø 16-50 mm
	maximum curve diameter 	6 cm	12 cm	25 cm	/	2 cm
	easy to get round curves 	★★★★☆	★★★★☆	★★★☆☆	★★★☆☆	★★★★★
	pushing force 	★★★★☆	★★★☆☆	★★★☆☆	★★★★★	★★★★★
	slide into the sheath 	★★★☆☆	★★★☆☆	★★★☆☆	★★★★★	★★★★★
twisting force 	★★★★☆	★★★☆☆	★★★☆☆	★★★★★	★★★★★	
PULL THE CABLE	traction resistance 	★★★★☆	★★★★☆	★★★★★	★★★☆☆	★★★☆☆
	curve traction resistance 	★★★★★	★★★☆☆	★★★★☆	★★★☆☆	★★★★★

★★★★☆ normal

★★★☆☆ good

★★★★★ very good

★★★★★ excellent



DRAW-WIRES AND ACCESSORIES

PULL-WIRES - SMALL

WHEN CHOOSING A PULL-WIRE, YOU NEED TO DEFINE...

... ITS APPLICATION FIRST OF ALL...



RESIDENTIAL - SMALL COMMERCIAL WORK

- Walls, skirting boards, hollow partitions and ducts
- Narrow or congested rigid conduit
- Passageways with corners
- Short pulling length



ROOFING - COMMERCIAL BUILDING

- False ceilings and attics
- Straight rigid conduit with few corners or no ducts
- Short and medium pulling lengths



PUBLIC WORKS - INDUSTRY

- Outdoor, underground, road or industrial installations
- Wide pipes
- Straight ducts
- Long pulling length

... THEN ITS USE.



Basic:
Steel-nylon pull-wire with Bizkart casing, 20 m, Ø 4 mm (BIZ700233)



Basic:
Steel-nylon pull-wire with Bizkart casing, 30 m, Ø 4 mm (BIZ700234)



Basic:
Steel-nylon pull-wire 52 m, Ø 6 mm (BIZ700235) or 102 m, Ø 10 mm (BIZ700251)



Professional:
Polyester monofilament pull-wire Ø 3 mm 15 m (BIZ760011)



Professional:
12 m kit, 5 mm Ø red fiberglass cable rods (BIZ700130)



Professional:
Steel-nylon pull-wire Ø 6 mm 52 m with dispenser reel (BIZ760000)

Each pull-wire is specific

MATERIALS

**Nylon Steel:**

- Pull-wire with flexible steel wire core, external Polypropylene coating and interchangeable terminals
- Flexible
- Few friction points
- Long lifetime
- High traction resistance

**Fiberglass:**

- Glass filament pull-wire, very stiff and insulated with interchangeable terminals
- Strong pushing force
- Easy introduction
- Does not turn on its axis
- No friction points

**Single Stranded Polyester:**

- Moulded polyester pull-wire with crimped terminals
- Flexible
- Good pushing force
- Don't turn on this axis
- No friction points
- No form memory



CABLING AND INSTALLATION ACCESSORIES
 HARDWARE
 TAPES
 CHEMICALS
 HAND TOOLS
 POWER TOOLS AND CONSUMABLES
 SITE AND WORKSHOP EQUIPMENT
 PROTECTION, SAFETY AND SIGNS
 PLUMBING

DRAW-WIRES AND ACCESSORIES

PULL-WIRES - SMALL

TO FACILITATE YOUR CABLE PULLING OPERATIONS

PULL-WIRE CASE BIZKART

- For winding and unwinding the pull-wire quickly and easily
- Easy storage
- Fast opening for repairing or replacing the pullwire



STEEL-NYLON PULL-WIRES WITH BIZKART CASING **NEW**



- Flexible.
- Long lifetime.



Supplied in BIZKART casing with:

- 1 rigid head with M5 Ø 6 mm pulling eye (BIZ 700 240).
- 1 standard M5 Ø 6 mm eye (BIZ 700 241).

Application(s):

For pulling cables through conduits and electrical ducts of diameter 20 to 32 mm.

Technical details:

- Hexagonal crimping.
- Removable flexible head and eyelet.

Advice:

Ideal for cable pulling in congested environment.

AU Part #	BIZ-reference	Length (m)	Thread type	Accessories included	Pull-wire Ø (mm)	Breakage (kg)
BIZ700233	BIZ 700 233	20	M5	BIZ 700 240 BIZ 700 241	4	130
BIZ700234	BIZ 700 234	30	M5	BIZ 700 240 BIZ 700 241	4	130



DRAW-WIRES AND ACCESSORIES

PULL-WIRES - SMALL

POLYESTER MONOFILAMENT PULL-WIRE WITHOUT BIZKART CASING **NEW**

With fixed flexible head with pulling eyelet and fixed pulling eyelet.

Application(s):

Pulling cable through diameter 16-50 mm conduits and electrical ducts even obstructed.

Technical details:

- Hexagonal crimping.

Advice:

Ideal solution for pulling cable in various applications even obstructed. Suited for both straight and bent electrical ducts.

- Good mechanical strength.
- No shape memory.
- Excellent twisting strength.
- Ultra-slim diameter.



AU Part #

BIZ-reference

Length (m)

Pull-wire Ø (mm)

Breakage (kg)

BIZ760011

BIZ 760 011

15

3

80

PULL-WIRES - LARGE

STEEL-NYLON PULL-WIRES WITHOUT DISPENSER **NEW**

Supplied with:

- For BIZ 700 235: flexible guide head with ball, M5 (BIZ 700 238) and pulling eye, M5 (BIZ 700 242).
- For BIZ 700 251: flexible guide head with ball, M12 (BIZ 700 247) and a 30 mm Ø roller that can be transformed into a pulling eye, M5 (BIZ 700 248).

Application(s):

For pulling cables through conduits and electrical ducts.

Technical details:

- Hexagonal crimping.

Advice:

Ideal for pulling cables in tight environments.

- Flexible.
- Long lifetime.



AU Part #

BIZ-reference

Length (m)

Thread type

Accessories included

Pull-wire Ø (mm)

Breakage (kg)

BIZ700235

BIZ 700 235

52

M5

BIZ 700 238 BIZ 700 242

6

350

• **BIZ700251**

BIZ 700 251

102

M12

BIZ 700 247 BIZ 700 248

10

800

STEEL-NYLON PULL-WIRES WITH DISPENSER REEL **NEW**

Supplied with:

- For BIZ 760 000: a dispenser reel (height 80 cm, BIZ 760 005), a rigid head with pulling eye, M5 Ø 8 mm (BIZ 700 239), a flexible guide head with ball, M5 (BIZ 700 238) and a pulling eye, M5 Ø 8 mm (BIZ 700 242).
- For BIZ 760 001 a dispenser reel (height 112 cm, BIZ 760 006), a flexible guide head with ball, M12 (BIZ 700 247) and a roller, M12 Ø 30 mm that can be transformed into a pulling eye (BIZ 700 248).

Application(s):

For pulling cables through conduits and electrical ducts.

Technical details:

- Hexagonal crimping.

Advice:

Ideal for pulling cables in tight environments.

- Flexible.
- Extended lifetime.



AU Part #

BIZ-reference

Length (m)

Thread type

Accessories included

Pull-wire Ø (mm)

Breakage (kg)

• **BIZ760000**

BIZ 760 000

52

M5

BIZ 700 239 BIZ 700 238
BIZ 700 242 BIZ 700 243

6

350



DRAW-WIRES AND ACCESSORIES

ACCESSORIES FOR ANY PULL-WIRES TYPE

DISPENSER REEL HEIGHT 98 CM FOR PULL-WIRE 102 M **NEW**

Compatible with 102 m pull wires.

• Suited for use in the vertical and horizontal position.



AU Part # • **BIZ760006** / BIZ 760 006

M5 ACCESSORIES

PULLING EYE, M5, Ø 6 MM **NEW**

Fully suitable for the following products: BIZ 700 101, BIZ 700 102, BIZ 700 103, BIZ 700 233, BIZ 700 234, BIZ 700 076, BIZ 700 086, BIZ 700 391.



AU Part # • **BIZ700241** / BIZ 700 241

PULLING EYE, M5, Ø 8 MM **NEW**

Fully suitable for the following products: BIZ 700 235, BIZ 760 000, BIZ 700 259, BIZ 760 002, BIZ 760 007, BIZ 760 008.



AU Part # • **BIZ700242** / BIZ 700 242

RIGID HEAD WITH PULLING EYE, M5, Ø 6 MM **NEW**

Fully suitable for the following products: BIZ 700 101, BIZ 700 102, BIZ 700 103, BIZ 700 233, BIZ 700 234, BIZ 700 076, BIZ 700 086, BIZ 700 391.



AU Part # • **BIZ700240** / BIZ 700 240



DRAW-WIRES AND ACCESSORIES

M5 ACCESSORIES

RIGID HEAD WITH PULLING EYE, M5, Ø 8 MM **NEW**

Fully suitable for the following products: BIZ 700 235, BIZ 760 000, BIZ 700 259, BIZ 760 002, BIZ 760 007, BIZ 760 008.



AU Part # • **BIZ700239** / BIZ 700 239

FLEXIBLE GUIDE HEAD WITH BALL, M5, Ø 8 MM **NEW**

Fully suitable for the following products: BIZ 700 235, BIZ 760 000, BIZ 700 259, BIZ 760 002, BIZ 760 007, BIZ 760 008.



AU Part # • **BIZ700238** / BIZ 700 238

ALUMINIUM ROLLER, M5, Ø 30 MM **NEW**

Advice:

The wheel and bail can be unscrewed to form a pulling ring.

• Makes it easier to run the wire pull through wide ducts.



AU Part # • **BIZ700243** / BIZ 700 243



DRAW-WIRES AND ACCESSORIES

M12 ACCESSORIES

FLEXIBLE GUIDE HEAD WITH BALL, M12, Ø 14 MM **NEW**

Fully suitable for the following products: BIZ 760 001, BIZ 760 003, BIZ 760 004, BIZ 700 252, BIZ 700 253.



AU Part # • **BIZ700247** / BIZ 700 247

SLIDE WHEEL M12 Ø 30 MM **NEW**

Fully compatible with the following products: BIZ 760 001, BIZ 760 003, BIZ 760 004, BIZ 700 252, BIZ 700 253.

• Facilitates the passage of the pull wire in wide conduits.



Advice:

The wheel and bail can be unscrewed to form a pulling ring.



AU Part # • **BIZ700248** / BIZ 700 248

PULL-WIRE REPAIR

REPAIR KIT FOR STEEL/NYLON 10 MM Ø PULL-WIRES **NEW**

Composed of:

- 2 M12 threaded tips.
- 4 locking screws.
- 1 drill bit.

Advice:

To implement a junction between two ends of Ø 10 mm steel-nylon fibre, use the female/female double connecting sleeve M12-M12 (BIZ 700 257).

Technical documentation available on our website: User manual.



AU Part # • **BIZ700452** / BIZ 700 452



CABLE ACCESS ROD AND ACCESSORIES

CABLE ACCESS RODS

12 M FIBERGLASS CABLE ROD KIT **NEW**



Kit includes:

- 12 rods of 1 m.
- 1 round end tip.
- 1 flat end tip.
- 1 pulling ring that can be changed into an eye.
- 1 female/female adapter.
- 1 large hook.
- 1 flexible nylon guide, 17.5 cm.
- 1 flexible nylon guide, 33 cm.

Supplied with a storage tube.

Application(s):

Pulling cables through false ceilings, hollow partitions, ducts and conduits.

AU Part #	BIZ-reference	Ø (mm)	Color
BIZ700130	BIZ 700 130	5	Red

KIT OF 2 CABLE RODS **NEW**



AU Part #	BIZ-reference	Ø (mm)	Length (m)	Color
BIZ700136	BIZ 700 136	5	2 x 1	Red

ACCESSORIES FOR CABLES RODS

KIT OF 6 ACCESSORIES FOR CABLE RODS **NEW**



Kit includes:

- 1 round end tip.
- 1 flat end tip.
- 1 female/female adapter.
- 1 large hook.
- 1 small hook.
- 1 pulling ring that can be changed into an eye.

Supplied with a storage tube.

AU Part #	BIZ700132 / BIZ 700 132
-----------	--------------------------------

KIT OF 2 CABLE GRIPS 6-15 MM **NEW**



Kit includes 2 cable grips:

- 1 for 6-10 mm cables.
- 1 for 11-15 mm cables.

Technical details:

- Made of stainless steel and equipped with threaded tips for cable rods.
- Tensile strength: 80 kg.

Instructions:

Pulling the cable grip tightens and grips the cable firmly.

AU Part #	BIZ700149 / BIZ 700 149
-----------	--------------------------------



MULTI-WAY EXTENSION LEADS

PLUGS

POWER BOARDS

Power board with overload protection.

Technical details:

- Maximum power: 2400 W.
- > AS/NZS 3105



AU Part #	BIZ-reference	Number of sockets	Length (m)	Cable type
BIZPB0001	BIZ 390 525	4	1	H05VV-F 3G1 mm ²
BIZPB0005	BIZ 390 527	6	1	H05VV-F 3G1 mm ²

EXTENSION CORDS

DOMESTIC EXTENSION LEADS

Application(s):

Domestic duty extension leads for home and office application.

Technical details:

- Current: 10 A.
- Plug and socket: 10 A, 250 V.
- Maximum power: 2500 W.
- Color: white.
- > AS/NZS3120 Inc A1



AU Part #	BIZ-reference	Length (m)	Cable type
BIZELDW02	BIZ 709 924	2	H05VV-F 3 x 1,0 mm ²
BIZELDW03	BIZ 709 925	3	H05VV-F 3 x 1,0 mm ²
BIZELDW05	BIZ 709 926	5	H05VV-F 3 x 1,0 mm ²
BIZELDW10	BIZ 709 928	10	H05VV-F 3 x 1,0 mm ²

EXTENSION LEADS PIGGYBACK/TAPON

Piggyback type for home and office application.

Technical details:

- Current: 10 A.
- Plug and socket: 10 A, 250 V.
- Max. power: 2500 W.
- Color: white.



AU Part #	BIZ-reference	Length (m)	Cable type
BIZELPBW01	BIZ 709 948	1	H05VV-F 3 x 1,0 mm ²
BIZELPBW02	BIZ 709 949	2	H05VV-F 3 x 1,0 mm ²
BIZELPBW04	BIZ 709 950	4	H05VV-F 3 x 1,0 mm ²



EXTENSION CORDS

EXTENSION LEADS HEAVY DUTY YELLOW

**Application(s):**

Heavy duty type for worksite application.

Technical details:

- Current: 10 A
- Clear neon plug.
- Plug and socket: 10 A, 250 V.
- Max. power: 2500 W.
- Color: yellow.

> AS/NZS3120 Inc A1

AU Part #	BIZ-reference	Length (m)	Cable type
BIZELHDY10	BIZ 709 933	10	4V-75 0,6/1 KV 3 x 1 mm ²
BIZELHDY15	BIZ 709 934	15	4V-75 0,6/1 KV 3 x 1 mm ²
BIZELHDY20	BIZ 709 935	20	4V-75 0,6/1 KV 3 x 1 mm ²

EXTENSION LEADS EXTRA HEAVY DUTY RED

**Application(s):**

Heavy duty type for worksite application.

Technical details:

- Cable current: 10 A.
- Plug and socket: 10 A, 250 V.
- Clear neon plug.
- Color: red.

> AS/NZS3120 Inc A1

AU Part #	BIZ-reference	Length (m)	Cable type
BIZELEHDR20	BIZ 709 940	10	V-75 0,6/1 KV 3 x 1,5 mm ²
BIZELEHDR30	BIZ 709 941	30	V-75 0,6/1 KV 3 x 1,5 mm ²

EXTENSION LEADS INDUSTRIAL BLUE

**Application(s):**

Industrial type for workshop application.

Technical details:

- Current: 15 A.
- Clear neon plug.
- Plug and socket: 15 A, 250 V.
- Max. power: 3750 W.
- Color: blue.

> AS/NZS3120 Inc A1

AU Part #	BIZ-reference	Length (m)	Cable type
BIZELIB10	BIZ 709 943	10	V-75 0,6/1 KV 3 x 1,5 mm ²
BIZELIB20	BIZ 709 945	20	V-75 0,6/1 KV 3 x 1,5 mm ²

EXTENSION LEADS IEC



IEC type for home and office application.

Technical details:

- Current : 10 A.
- Plug and socket: 10 A, 250 V.
- Max power : 2500 W.
- Color: black.

AU Part #	BIZ-reference	Length (m)	Plug type	Cable type
BIZPCIECFP2	BIZ 709 911	2	Female IEC / male power plug	H05VV-F 3G1,0 mm ²
BIZPCIECFP5	BIZ 709 912	5	Female IEC / male power plug	H05VV-F 3G1,0 mm ²
BIZPCIECMS2	BIZ 709 913	2	Male IEC / female power socket	H05VV-F 3G1,0 mm ²



ELECTRICAL CONNECTION

ELECTRICAL CORDS 2.5 A

PLUG AND CORD LIGHT DUTY 2P

Technical details:

- Terminal on phase wire.
 - Color: black.
- > AS/NZS3112 IncA1-2 (SAA)



AU Part #	BIZ-reference	Length (m)	Plug type	Cable type
BIZPC2752BK	BIZ 709 903	2	2P+7,5 A	H03VVH2-F 2G0,75 mm ²

ELECTRICAL CORDS 16 A

PLUGS AND CORDS 3P NO TERMINALS

Technical details:

- Color: grey.
- > AS/NZS3112 IncA1-2 (SAA)



AU Part #	BIZ-reference	Length (m)	Plug type	Cable type
BIZPC31017GYNT	BIZ 709 908	1,7	2P+E 10 A	H05VV-F 3G1,00 mm ²
BIZPC37517GYNT	BIZ 709 909	1,7	2P+E 7,5 A	H05VV-F 3G0,75 mm ²

PLUGS AND CORDS 3P WITH TERMINALS

Technical details:

- Terminal on ground wire.
 - Color: grey.
- > AS/NZS3112 IncA1-2 (SAA)



AU Part #	BIZ-reference	Length (m)	Plug type	Cable type
BIZPC3102GY	BIZ 709 904	2	2P+E 10 A	H05VV-F 3G1,00 mm ²
BIZPC3103GY	BIZ 709 905	3	2P+E 10 A	H05VV-F 3G1,00 mm ²
BIZPC31017GY	BIZ 709 906	1,7	2P+E 10 A	H05VV-F 3G1,00 mm ²
BIZPC37517GY	BIZ 709 907	1,7	2P+E 7,5 A	H05VV-F 3G0,75 mm ²



SITE LIGHTING

PORTABLE LAMPS

LED POCKET INSPECTION LIGHT **NEW**



Magnetic and rotating at 180°

Battery-operated mini magnetic LED lamp.

Application(s):

Ideal for lighting electric cabinets.

Technical details:

- Power: 3 W.
 - 3 x AAA 1.5 V batteries (not supplied).
 - Light flow: 120 lm.
 - Operating time 8 h.
 - 180 ° rotation.
 - Magnetic.
- > IP20



AU Part #

BIZ620260 / BIZ 620 260

CLEANING EQUIPMENT

MULTIPLE FUNCTIONS

BIZ' BUCKET **NEW**

This bucket is a useful tool for many different tasks, whether you're gardening, painting, window cleaning, mopping the floor or looking for a place to store tools and equipment.

Technical details:

- Litres pail.
- Lid included.
- Stackable.
- Leak proof solution.



AU Part #

BIZ740129 / BIZ 740 129



STORAGE

STRAPS

STRAPS WITH TIGHTENING BUCKLE

Application(s):

For strapping and stowing light loads on trailers, galleries, etc.

Technical details:

- Polypropylene.
- > EN 12195-2. AS/NZS4380:2001.



AU Part #	BIZ-reference	Length (m)	Width (mm)	Stowage capacity (daN)*	Breaking load (daN)*	Color
BIZTS100WH	BIZ 390 478	1	20	100	300	White
BIZTS200WH	BIZ 390 479	1	25	200	600	White
BIZTS100YE	BIZ 390 476	1,5	20	100	300	Yellow
BIZTS200YE	BIZ 730 930	1,5	25	200	600	Yellow
BIZTS100BL	BIZ 390 474	2	20	100	300	Blue
BIZTS200BL	BIZ 390 475	2	25	200	600	Blue
BIZTS100RD	BIZ 390 472	2,5	20	100	300	Red
BIZTS200RD	BIZ 390 473	2,5	25	200	600	Red
BIZTS100BK	BIZ 390 470	3	20	100	300	Black
BIZTS200BK	BIZ 730 931	3	25	200	600	Black

* 1 daN = approx. 1 kg.



PROTECTION, SAFETY AND SIGNS

GLOVES

122

SIGNALLING

127

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING



GLOVES

CUT RESISTANT GLOVES

Handling of sheets, profiles or any cutting parts.
 Composition: HPPE and spandex, PU coating.
 Cuff length (cm): 13.
 Category: II.
 Abrasion resistance 4/4.
 Resistance to cutting by slicing 3/5.
 Tear resistance 4/4.
 Puncture resistance 3/4.
 CT ISO 13997: C.

STANDARDS: GLOVES

The general requirements relating to hand protection are defined in standard EN 420, which sets out the obligations for marking, requirements in terms of ergonomic design, sizes, risk levels etc.

Specific standards are used to define the expected levels of performance depending on the hazards involved, in particular:


- Mechanical hazards (abrasion, cuts, tears, perforation, etc.)
- Thermal hazards (heat and flame, cold etc.)
- Chemical hazards
- Electrical hazards

STANDARD EN 388: protective gloves against mechanical risks

Standard EN 388 defines the expected levels of performance for:

RESISTANCE	LEVELS
Abrasion	de 1 to 4
Cutting by slicing	de 1 to 5
Tearing	de 1 to 4
Puncturing	de 1 to 4

At the end of 2016, changes made to the standard for technical gloves. Marking must include two new tests.

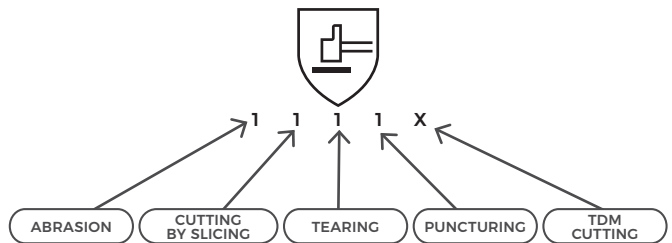


Cutting resistance according to TDM (ISO 13997) test (N)

A à F

Impact protection

optional and indicated by P

The higher the level, the greater the resistance.
 X = not tested for this hazard.

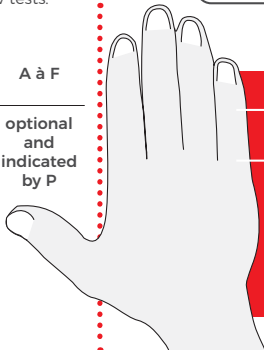

Choose your size carefully... →

Confirm your size: Place your hand as shown in the diagram. The red line between the thumb and the index finger. Read the size to the right of your hand.

9 10



GLOVES

CUT RESISTANT GLOVES

LEVEL 3 ANTI-CUT GLOVES

Application

Handling of metal sheets, profiles, or any other cutting parts.

Advantages

Internal coating providing maximum abrasion and tearing resistance. Flexible textile combining comfort, dexterity and breathability for extended use.

Grip coating guaranteeing controlled object hold.

Benefits

Ideal for perfectly safe and precise cutting part handling operations in dry environments.



4 3 4 2 D



LEVEL 3 CUT RESISTANT GLOVES



Handling of metal sheets, profiles, or any other sharp-edged parts.

- Composition: HPPE and spandex, PU coating.
- Category II.
- Abrasion resistance 4/4.
- Resistance to cuts by slicing 3/5.
- Tearing resistance 4/4.
- Perforation resistance 2/4.
- Cutting resistance according to TDM (ISO 13997) D.

> EN 388: 2016 and EN 420



4 3 4 2 D



AU Part #	BIZ-reference	Size
BIZ730143	BIZ 730 143	9
BIZ730144	BIZ 730 144	10



GLOVES

HANDLING GLOVES EASY TOUCH

A real second skin.

Application

Light precision handling, lighting installation.

Advantages


Flexible nylon textile for highly flexible movement. Grip covering guaranteeing quick and easy object hold. Conductive material on all the fingers enabling touch surfaces to be used with the gloves.

Benefits

The perfect ally for all light handling work which requires dexterity and precision.



1 1 3 1 X



HANDLING GLOVES EASY TOUCH



NO
TOUCH

NEW

A true second skin, perfectly suited to work requiring extreme accuracy. Light precision handling.

- Composition: nylon, PU coating.
- Category II.
- Resistance to abrasion 1/4.
- Resistance to cuts by slicing 1/5.
- Resistance to tearing 3/4.
- Resistance to perforation 1/4.
- ISO 13997 (X).

> Meets EN 388 + EN 420



1 1 3 1 X



AU Part #

BIZ-reference

Size

BIZ730151

BIZ 730 151

9

BIZ730152

BIZ 730 152

10



GLOVES



HANDLING GLOVES EASY GRIP

Application
Light handling and tool handling in dusty or slightly damp environments.

Advantages
Coating providing excellent grip and object hold.
Flexible textile combining comfort and dexterity for extended use.
Elastic wrist for better protection against dirt.

Benefits
The flawless equipment for safe and professional movement during operations in dry environments.







2 1 2 1 X

HANDLING GLOVES EASY GRIP



NO
ISO 15011



NEW

Light handling requiring good grip.

- Composition: polyamide, latex coating.
- Category II.
- Abrasion resistance 2/4.
- Resistance to cuts by slicing 1/5.
- Tearing resistance 2/4.
- Perforation resistance 1/4.
- Cutting resistance according to TDM (ISO 13997) D.

> EN 388: 2016 and EN 420





2 1 2 1 X

AU Part #	BIZ-reference	Size
BIZ730153	BIZ 730 153	9
BIZ730154	BIZ 730 154	10



GLOVES



HANDLING GLOVES EASY FIT

Application
Light handling, packing, maintenance, lighting installation.

Advantages
Flexible nylon textile offering enhanced dexterity during use. Elastic wrist for better protection against dirt. Fine and light gloves for good hand breathability.

Benefits
Enables constraint-free operation in minor risk environments.







3 1 2 1 X

HANDLING GLOVES EASY FIT

NEW

- Light handling, packaging, maintenance.
- Composition: polyamide, polyurethane coating.
 - Category II.
 - Resistance to abrasion 3/4.
 - Resistance to cuts by slicing 1/5.
 - Resistance to tearing 2/4.
 - Resistance to perforation 1/4.
 - ISO 13997 (X).
- > Meets EN 388 + EN 420



AU Part #	BIZ-reference	Size	Number of pairs
BIZ730149	BIZ 730 149	9	10
BIZ730150	BIZ 730 150	10	10



SIGNALLING

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING




SITE MARKING TAPE

NEW

Non-adhesive PET tape.
Dimensions: 75 mm x 500 m x 0.3 mm.

AU Part #	BIZ-reference	Length (m)	Width (mm)	Thickness (mm)
BIZ351040	BIZ 351 040	500	75	0,30



YELLOW/BLACK ADHESIVE TAPE

NEW

PVC tape, rubberised adhesive.
Marking of hazardous traffic routes in workshops.
Identification of mobile equipment.
Demarcation of areas with restricted passage.

- Breaking load: 23 N/cm.
- Elongation at break: 170 %.
- Adhesive power: 1.2 N/cm.
- Unrolling force: 2.3 N/cm.
- Temperature resistance: 80 °C.

AU Part #	BIZ-reference	Length (m)	Width (mm)	Thickness (mm)
BIZ351051	BIZ 351 051	33	50	0,17



UNDERGROUND WARNING TAPES

Non detectable underground tape.
For protection, location and identification of underground utility installations.

- Core inside Ø: 76 mm.
- Load at yield
 - Mounting direction: 71.2 N.
 - Transverse direction: 60.0 N.
- Load at break
 - Mounting direction: 109.0 N.
 - PSI: 18.6 MPa.
 - Transverse direction: 104.5 N.
 - PSI: 17.9 MPa.
- Elongation at break
 - Mounting direction: 71.2 N.
 - Transverse direction: 60.0 N.
- PPT resistance
 - Mounting direction: 60 N.
 - Transverse direction: 62.3 N.
- Tongue tear
 - Mounting direction: 13.2 N.
 - Transverse direction: 22.7 N.

- > AS2648.1:1995.
- > AS4275.

AU Part #	BIZ-reference	Color	Text	Length (m)	Width (mm)	Thickness (mm)	Material
BIZUMT0100	BIZ 351 061	Orange	WARNING WARNING WARNING ELECTRICAL CABLE BELOW	100	150	0,08	Polyethylene
BIZUMT0500	BIZ 351 065	Orange	WARNING WARNING WARNING ELECTRICAL CABLE BELOW	500	150	0,08	Polyethylene
BIZUMTW100	BIZ 351 071	White	WARNING WARNING WARNING COMMUNICATIONS CABLE BELOW	100	150	0,08	Polyethylene
BIZUMTW500	BIZ 351 075	White	WARNING WARNING WARNING COMMUNICATIONS CABLE BELOW	500	150	0,08	Polyethylene




SIGNALLING

TEST TAGS

MEDIUM DUTY TEST TAGS

NEW

 Check the color guide on packaging headercard.




Dimensions (mm) : 42 x 100.
 Cross-Laminated High Density Polyethylene coated with extra strong adhesive.
 Complies with AS/NZS 3760.
 Supplied with a permanent double sided marking pen (thin and thick tip).
 Complete applicable information.
 Place the label on lead at label arrow mark within 300mm of plug.
 > Complies with AS/NZS 3760.

AU Part #	BIZ-reference	Color	Quantity per bag
BIZ730500	BIZ 730 500	Black	100
BIZ730501	BIZ 730 501	Blue	100
BIZ730502	BIZ 730 502	Burgundy	100
BIZ730503	BIZ 730 503	Green	100
BIZ730504	BIZ 730 504	Grey	100
BIZ730505	BIZ 730 505	Orange	100
BIZ730506	BIZ 730 506	Red	100
BIZ730507	BIZ 730 507	White	100
BIZ730508	BIZ 730 508	Yellow	100
BIZ730531	BIZ 730 531	Red/blue/yellow/green/orange/white	96

HEAVY DUTY TEST TAGS

NEW

 Check the color guide on packaging headercard.



Dimensions (mm) : 32 x 110.
 PVC coated with extra strong adhesive.
 Complies with AS/NZS 3760.
 Supplied with a permanent double sided marking pen (thin and thick tip).
 Complete applicable information.
 Place the label on lead at label arrow mark within 300mm of plug.
 > Complies with AS/NZS 3760.

AU Part #	BIZ-reference	Color	Quantity per bag
BIZ730550	BIZ 730 550	Black	100
BIZ730551	BIZ 730 551	Blue	100
BIZ730552	BIZ 730 552	Burgundy	100
BIZ730553	BIZ 730 553	Green	100
BIZ730554	BIZ 730 554	Grey	100
BIZ730555	BIZ 730 555	Orange	100
BIZ730556	BIZ 730 556	Red	100
BIZ730557	BIZ 730 557	White	100
BIZ730558	BIZ 730 558	Yellow	100
BIZ730560	BIZ 730 560	Red/blue/yellow/green/orange/white	96



SIGNALLING

TEST TAGS

RCD TESTED BY	TRIP TIME
CIRCUIT No.	NEXT TEST DUE

RCD TEST TAGS

NEW


Label the results of the RCD (residual current device) to ensure compliance with the Australian Standard AS/NZS 3760.

- Dimensions (mm): 16 x 37.
- Self adhesive.

AU Part #	BIZ-reference	Quantity per bag
BIZ730530	BIZ 730 530	100

SAFETY LOCKOUT TAGS

NEW

 Protect workers from potential danger.



Dimensions (mm) : 72 x 140.
All tags are laminated.

AU Part #	BIZ-reference	Quantity per bag
BIZ730540	BIZ 730 540	5
BIZ730541	BIZ 730 541	5
BIZ730542	BIZ 730 542	5
BIZ730543	BIZ 730 543	5
BIZ730544	BIZ 730 544	5

LOG BOOKS

NEW

Log the test results of the RCDs (residual current device) and electrical equipment to ensure compliance with the AS/NZS 3760 standard.

- Pages: 100.
- Dimensions: 150 x 200 mm.



AU Part #	BIZ-reference	Type
BIZ730545	BIZ 730 545	RCD
BIZ730546	BIZ 730 546	Electrical Equipment



PLUMBING

PLUMBING ACCESSORIES

132

BENDINGS

133



⚠ Before obtaining access to terminals, all power supply circuits must be interrupted.
⚠ Vor Zugriff auf die клемmen müssen die Stromkreise der Spannungsversorgung unterbrochen werden.
⚠ Avant d'accéder aux bornes de raccordement, tous les circuits d'alimentation doivent être déconnectés.
⚠ Уведіть і де клемми будуть діяти всі споживачів електрики.
⚠ Antes de acceder a los terminales se deben cortar todos los circuitos de alimentación eléctrica.
⚠ Преди да получите достъп до терминалите, всички електрозахранващи вериги трябва да бъдат прекъснати.
⚠ Antes de obter acesso aos terminais, todos os circuitos de abastecimento elétrico devem ser interrompidos.
⚠ Преди това, всички вериги захранване с електроенергия трябва да бъдат прекъснати.
⚠ Alle stroomvoorzienende kringlopen moeten afgebroken worden.
⚠ Före arbete med kablar måste alla strömförande kretsar för avbrottsförsäkring.
⚠ All strömförande må være frakoblet før du kommer arbejdsområdet.
⚠ Ennen kuin kosketaan liittimiin, kaikki virtapiirit pitää sulkea.
⚠ Před získáním do vstupových musí být rozpojeny všechny

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING



PLUMBING ACCESSORIES

GUNS

CAULKING GUN

Technical details:

- Body and trigger in reinforced steel.
- Aluminium handle.
- No-drip function.
- Fitted out with a ladder hook.



AU Part #

BIZCG225

BIZ-reference

BIZ 710 214

For cartridges max. (ml)

310

Length (mm)

230

Weight (g)

480

GUN FOR CARTRIDGES AND INTUMESCENT FOAM NEW

Technical details:

- Body and trigger in reinforced steel.
- Aluminium handle.
- No-drip function.



AU Part #

BIZ710320

BIZ-reference

BIZ 710 320

For cartridges max. (ml)

330

Length (mm)

400

Weight (g)

800



PLUMBING ACCESSORIES

CABLING AND
INSTALLATION
ACCESSORIES

HARDWARE

TAPES

CHEMICALS

HAND TOOLS

POWER TOOLS AND
CONSUMABLES

SITE AND WORKSHOP
EQUIPMENT

PROTECTION,
SAFETY AND SIGNS

PLUMBING

MECHANICAL VENTILATION TAPE NEW

Aluminium tape, acrylic adhesive mass.

Application(s):

Joints in galvanised steel pipework.

Technical details:

- Dimensions: 50 mm x 50 m x 0.07 mm.
- Tensile strength: 40 N/cm.
- Elongation at break: 109 %.
- Adhesion: 10 N/cm.
- Operating temperature: 100 °C.

- Resistant to heat and humidity.
- High adhesion.
- Can be torn by hand.



AU Part #	BIZ-reference	Color	Length (m)	Width (mm)	Thickness (mm)
BIZ351021	BIZ 351 021	Aluminum	50	50	0.07

BENDINGS

BENDING SPRINGS

Use to bend around conduit.

Technical details:

- With a galvanized surface treatment.



AU Part #	BIZ-reference	Length (mm)	Tube Ø (mm)
BIZBS20	BIZ 400 101	815	20
BIZBS25	BIZ 400 102	815	25
BIZBS32	BIZ 400 103	815	32

BIZ210108	36	BIZ231057	31	BIZ620260	118
BIZ210115	36	BIZ231058	31	BIZ700001	74
BIZ210120	36	BIZ231059	27	BIZ700003	76
BIZ210125	36	BIZ231060	27	BIZ700010	70
BIZ218048	34	BIZ231061	27	BIZ700011	74
BIZ218071	34	BIZ300110	13	BIZ700012	78
BIZ220007	36	BIZ300111	13	BIZ700013	78
BIZ220008	36	BIZ300120	15	BIZ700031	89
BIZ225033	54	BIZ300121	15	BIZ700035	83
BIZ225040	26	BIZ300123	15	BIZ700036	83
BIZ225041	26	BIZ300512	21	BIZ700040	81
BIZ225042	26	BIZ300513	21	BIZ700043	76
BIZ225043	26	BIZ300515	21	BIZ700063	80
BIZ225044	26	BIZ304048	15	BIZ700085	76
BIZ225045	26	BIZ304050	15	BIZ700095	103
BIZ225046	26	BIZ304051	15	BIZ700115	82
BIZ225047	26	BIZ304052	15	BIZ700130	114
BIZ225048	26	BIZ304053	15	BIZ700132	114
BIZ225049	26	BIZ304055	15	BIZ700136	114
BIZ231000	29	BIZ310261	17	BIZ700149	114
BIZ231001	29	BIZ310262	17	BIZ700178	82
BIZ231002	29	BIZ310263	17	BIZ700187	81
BIZ231003	29	BIZ310264	17	BIZ700188	81
BIZ231004	29	BIZ310270	18	BIZ700202	75
BIZ231005	29	BIZ310271	18	BIZ700206	89
BIZ231006	29	BIZ310273	18	BIZ700207	106
BIZ231007	29	BIZ310275	18	BIZ700212	84
BIZ231008	29	BIZ310277	18	BIZ700226	90
BIZ231009	29	BIZ311271	18	BIZ700229	93
BIZ231010	29	BIZ320001	20	BIZ700230	80
BIZ231011	29	BIZ320002	20	BIZ700233	109
BIZ231012	29	BIZ320003	20	BIZ700234	109
BIZ231013	29	BIZ320004	20	BIZ700235	110
BIZ231015	29	BIZ320005	20	BIZ700238	112
BIZ231016	29	BIZ320006	20	BIZ700239	112
BIZ231017	29	BIZ320007	20	BIZ700240	111
BIZ231018	29	BIZ320008	20	BIZ700241	111
BIZ231021	30	BIZ320009	20	BIZ700242	111
BIZ231022	30	BIZ320010	20	BIZ700243	112
BIZ231023	30	BIZ351021	55, 33	BIZ700247	113
BIZ231024	30	BIZ351040	56, 127	BIZ700248	113
BIZ231025	30	BIZ351051	55, 127	BIZ700251	110
BIZ231026	30	BIZ351090	59	BIZ700273	78
BIZ231027	30	BIZ390052	21	BIZ700274	78
BIZ231028	30	BIZ390053	21	BIZ700275	106
BIZ231029	30	BIZ390490	56	BIZ700328	82
BIZ231030	30	BIZ390491	56	BIZ700335	88
BIZ231031	30	BIZ390492	56	BIZ700336	88
BIZ231033	30	BIZ399175	103	BIZ700386	88
BIZ231034	30	BIZ399176	103	BIZ700452	113
BIZ231036	30	BIZ399177	103	BIZ700460	84
BIZ231037	30	BIZ399178	103	BIZ700651	101
BIZ231038	30	BIZ399179	103	BIZ700653	101
BIZ231039	30	BIZ400170	63	BIZ700655	101
BIZ231045	31	BIZ400171	63	BIZ700656	101
BIZ231046	31	BIZ400172	63	BIZ700658	101
BIZ231047	31	BIZ400173	63	BIZ709990	102
BIZ231048	31	BIZ400174	63	BIZ709991	102
BIZ231049	31	BIZ400175	63	BIZ709992	102
BIZ231056	31	BIZ400176	63	BIZ710293	25



BIZ710294	25	BIZ750173	65	BIZ790601	100
BIZ710295	22	BIZ750174	65	BIZAP7RD	47
BIZ710306	23	BIZ760000	110	BIZAP8GN	47
BIZ710320	64, 132	BIZ760006	111	BIZAW150	79
BIZ710350	50	BIZ760011	110	BIZAW300	79
BIZ710351	50	BIZ780032	46	BIZBS20	133
BIZ710352	50	BIZ780033	46	BIZBS25	133
BIZ710353	50	BIZ780071	101	BIZBS32	133
BIZ710406	49	BIZ780080	101	BIZCC32	17
BIZ710560	62	BIZ780087	101	BIZCC48	17
BIZ710561	62	BIZ780089	101	BIZCC64	17
BIZ711300	63	BIZ780204	86	BIZCC79	17
BIZ711301	64	BIZ780205	87	BIZCC95	17
BIZ711302	64	BIZ780207	46	BIZCCF25TEP	18
BIZ711303	64	BIZ780208	46	BIZCCF4TEP	18
BIZ720150	45	BIZ780209	46	BIZCCT042B	83
BIZ720151	45	BIZ780218	50	BIZCG225	64, 132
BIZ720152	45	BIZ780219	50	BIZCGP12	33
BIZ720153	45	BIZ780399	86	BIZCGP16	33
BIZ720154	45	BIZ780428	86	BIZCGP20	33
BIZ730143	123	BIZ780852	87	BIZCGP25	33
BIZ730144	123	BIZ780853	87	BIZCGP32	33
BIZ730149	126	BIZ790009	75	BIZCGP32	33
BIZ730150	126	BIZ790010	70	BIZCGP40	33
BIZ730151	124	BIZ790011	77	BIZCGP50	33
BIZ730152	124	BIZ790017	76	BIZCGP63	33
BIZ730153	125	BIZ790019	75	BIZCMB1.6	16
BIZ730154	125	BIZ790037	83	BIZCMB2	16
BIZ730500	128	BIZ790062	89	BIZCRB0616	77
BIZ730501	128	BIZ790070	73	BIZCRP00506	77
BIZ730502	128	BIZ790071	73	BIZCT2825	43
BIZ730503	128	BIZ790072	73	BIZCTA69	16
BIZ730504	128	BIZ790073	73	BIZCTB10025100	13
BIZ730505	128	BIZ790074	73	BIZCTB100251000	13
BIZ730506	128	BIZ790075	73	BIZCTB15036100	13
BIZ730507	128	BIZ790076	73	BIZCTB150361000	13
BIZ730508	128	BIZ790080	73	BIZCTB20048100	13
BIZ730530	129	BIZ790082	74	BIZCTB200481000	13
BIZ730531	128	BIZ790083	73	BIZCTB25048100	13
BIZ730540	129	BIZ790088	73	BIZCTB250481000	13
BIZ730541	129	BIZ790089	73	BIZCTB30048100	13
BIZ730542	129	BIZ790194	80	BIZCTB300481000	13
BIZ730543	129	BIZ790200	70	BIZCTB37048100	13
BIZ730544	129	BIZ790202	79	BIZCTB43048100	13
BIZ730545	129	BIZ790211	80	BIZCTBHD20076100	13
BIZ730546	129	BIZ790212	84	BIZCTBHD38076100	13
BIZ730550	128	BIZ790214	84	BIZCTBHD550825	13
BIZ730551	128	BIZ790215	84	BIZCTBHD710925	13
BIZ730552	128	BIZ790278	27	BIZCTM19	16
BIZ730553	128	BIZ790279	32	BIZCTM26	16
BIZ730554	128	BIZ790280	27	BIZCTN10025100	12
BIZ730555	128	BIZ790281	27	BIZCTN15036100	12
BIZ730556	128	BIZ790282	32	BIZCTN20048100	12
BIZ730557	128	BIZ790283	32	BIZCTN200481000	12
BIZ730558	128	BIZ790503	97	BIZCTN25048100	12
BIZ730560	128	BIZ790519	91	BIZCTN250481000	12
BIZ740129	118	BIZ790529	95	BIZCTN30048100	12
BIZ750170	65	BIZ790530	95	BIZCTSS200	15
BIZ750171	65	BIZ790531	96	BIZCTSS360	15
BIZ750172	65	BIZ790532	96		

BIZCTSS360HD	15	BIZHSS10.5	102	BIZHSTW40RD/4FT	35
BIZCW7090180D	51	BIZHSS12	102	BIZHSTW40YG/4FT	35
BIZCW7090500D	51	BIZHSS13	102	BIZHSTW50BK/4FT	35
BIZCW712539	51	BIZHSS2.5	102	BIZHSTW50BL/4FT	35
BIZDT30BK	54	BIZHSS3	102	BIZHSTW50RD/4FT	35
BIZDT30GY	54	BIZHSS3.5	102	BIZHSTW50WH/4FT	35
BIZEBC	37	BIZHSS4	102	BIZHSTW5BK/4FT	34
BIZEBH	37	BIZHSS4.5	102	BIZHSTW5BL/4FT	34
BIZEBHN	37	BIZHSS5	102	BIZHSTW5CL/4FT	34
BIZEBHNA	37	BIZHSS5.5	102	BIZHSTW5RD/4FT	34
BIZEBP	37	BIZHSS6	102	BIZHSTW5YG/4FT	34
BIZEBVH	37	BIZHSS6.5	102	BIZHSTW7BK/4FT	34
BIZEBVNA	37	BIZHSS8	102	BIZHSTW7BL/4FT	34
BIZELDW02	115	BIZHSSDSM25	102	BIZHSTW7CL/4FT	34
BIZELDW03	115	BIZHSTW10BK/4FT	34	BIZHSTW7RD/4FT	34
BIZELDW05	115	BIZHSTW10BL/4FT	34	BIZHSTW7WH/4FT	34
BIZELDW10	115	BIZHSTW10CL/4FT	34	BIZHSTW7YG/4FT	34
BIZELEHDR20	116	BIZHSTW10RD/4FT	34	BIZHSTW80BK/4FT	35
BIZELEHDR30	116	BIZHSTW10WH/4FT	34	BIZHSTW80BL/4FT	35
BIZELHDY10	116	BIZHSTW10YG/4FT	34	BIZHSTW80RD/4FT	35
BIZELHDY15	116	BIZHSTW13BK/4FT	34	BIZHSTW80WH/4FT	35
BIZELHDY20	116	BIZHSTW13BL/4FT	34	BIZHWA05B	47
BIZELIB10	116	BIZHSTW13RD/4FT	35	BIZHWA1016	47
BIZELIB20	116	BIZHSTW13WH/4FT	35	BIZHWA610B	47
BIZELPBW01	115	BIZHSTW13YG/4FT	35	BIZHWA813B	47
BIZELPBW02	115	BIZHSTW2.5BK/4FT	34	BIZJ2C530P	50
BIZELPBW04	115	BIZHSTW2.5BL/4FT	34	BIZMDB5	101
BIZF035G	33	BIZHSTW2.5RD/4FT	34	BIZMDB5.5	101
BIZF555G	33	BIZHSTW2.5WH/4FT	34	BIZMDB6	101
BIZGC1620	48	BIZHSTW20BK/4FT	35	BIZMDB6.5	101
BIZGC2532	48	BIZHSTW20BL/4FT	35	BIZMFS12	19
BIZGC813	48	BIZHSTW20CL/4FT	35	BIZMFS20	19
BIZGELEXP	24	BIZHSTW20RD/4FT	35	BIZMFS20SS	20
BIZHD10160	101	BIZHSTW20WH/4FT	35	BIZMFS25	19
BIZHD12160	101	BIZHSTW20YG/4FT	35	BIZMFS25SS	20
BIZHD16460	101	BIZHSTW25BK/4FT	35	BIZMFS32	19
BIZHD20600	101	BIZHSTW25BL/4FT	35	BIZMFS32SS	20
BIZHD25260	101	BIZHSTW25CL/4FT	35	BIZMFS40	19
BIZHD5110	101	BIZHSTW25RD/4FT	35	BIZMFS50	19
BIZHD5160	101	BIZHSTW25WH/4FT	35	BIZMHS16	18
BIZHD55160	101	BIZHSTW25YG/4FT	35	BIZMHS20	18
BIZHD6110	101	BIZHSTW2BK/4FT	34	BIZMHS20A	18
BIZHD6160	101	BIZHSTW2BL/4FT	34	BIZMHS20HDG	18
BIZHD65110	101	BIZHSTW2CL/4FT	34	BIZMHS20SS	19
BIZHD65160	101	BIZHSTW2G/4FT	34	BIZMHS25	18
BIZHD8160	101	BIZHSTW2RD/4FT	34	BIZMHS25A	18
BIZHSA1430	103	BIZHSTW2WH/4FT	34	BIZMHS25SS	19
BIZHSA32210	103	BIZHSTW3BK/4FT	34	BIZMHS32	18
BIZHSMW10/3	35	BIZHSTW3BL/4FT	34	BIZMHS32SS	19
BIZHSMW115/34	35	BIZHSTW3CL/4FT	34	BIZMHS40	18
BIZHSMW19/6	35	BIZHSTW3RD/4FT	34	BIZMHS50	18
BIZHSMW28/9	35	BIZHSTW3WH/4FT	34	BIZNAM525	45
BIZHSMW38/12	35	BIZHSTW3YG/4FT	34	BIZNAM6525	45
BIZHSMW52/16	35	BIZHSTW40BK/4FT	35	BIZNAM6538	45
BIZHSMW85/25	35	BIZHSTW40BL/4FT	35	BIZNAM6550	45
BIZHSS10	102	BIZHSTW40CL/4FT	35	BIZNAR525	45



BIZNAR540	45	BIZSB20	36	BIZSPN712	40
BIZNAR6525	45	BIZSBN720	41	BIZSPN712J	40
BIZNAR6538	45	BIZSBN720J	41	BIZSPN720	40
BIZNAR6550	45	BIZSBN720P	41	BIZSPN720J	40
BIZNHP316	44	BIZSBN725	41	BIZSPN725	40
BIZNHP532	44	BIZSBN725J	41	BIZSPN725J	40
BIZNSB127	17	BIZSBN725P	41	BIZSPN730	40
BIZNSB159	17	BIZSBN730	41	BIZSPN730J	40
BIZNSB191	17	BIZSBN730J	41	BIZSPN740	40
BIZNSB206	17	BIZSBN730P	41	BIZSPN740J	40
BIZNSB254	17	BIZSBN735	41	BIZSPN750	40
BIZNSB318	17	BIZSBN735P	41	BIZSPN750J	40
BIZNSB381	17	BIZSBN745	41	BIZSSHV4100	73
BIZNSB508	17	BIZSBN745J	41	BIZSTR182	51
BIZPAD250	69	BIZSBN750	41	BIZSTR183	51
BIZPB0001	115	BIZSBN750J	41	BIZSTR3162	51
BIZPB0005	115	BIZSBN850	41	BIZSTR3163	51
BIZPC2752BK	117	BIZSBN850J	41	BIZSWD1022	43
BIZPC31017GY	117	BIZSBN863	41	BIZSWD1030	43
BIZPC31017GYNT	117	BIZSBN863J	41	BIZSWD1040	43
BIZPC3102GY	117	BIZSBN875	41	BIZTBH10	51
BIZPC3103GY	117	BIZSBN875J	41	BIZTBH5	51
BIZPC37517GY	117	BIZSBTD812	41	BIZTBH6	51
BIZPC37517GYNT	117	BIZSBTD812J	41	BIZTBH8	51
BIZPCIECFP2	116	BIZSBTD825	41	BIZTBT290	94
BIZPCIECFP5	116	BIZSBTD825J	41	BIZTPEHD	94
BIZPCIECMS2	116	BIZSBTD832	41	BIZTS100BK	119
BIZPROAWR250	79	BIZSBTD832J	41	BIZTS100BL	119
BIZPROCROS180	82	BIZSBTN812	42	BIZTS100RD	119
BIZPROPLNHV200	69	BIZSBTN812J	42	BIZTS100WH	119
BIZPROPSCHV200	69	BIZSBTN825	42	BIZTS100YE	119
BIZPST150	83	BIZSBTN825J	42	BIZTS200BK	119
BIZRBN141	43	BIZSBTN832	42	BIZTS200BL	119
BIZRBN142	43	BIZSBTN832J	42	BIZTS200RD	119
BIZRBN1434	43	BIZSMTR3161	42	BIZTS200WH	119
BIZRBN3161	43	BIZSMTR316112	42	BIZTS200YE	119
BIZRBN3162	43	BIZSMTR316114	42	BIZUMTO100	57, 127
BIZSAEB845B	48	BIZSMTR31612	42	BIZUMTO500	127, 127
BIZSAH1040B	47	BIZSMTR3162	42	BIZUMTW100	57, 127
BIZSAH1050B	47	BIZSMTR3163	42	BIZUMTW500	57, 127
BIZSAH1075B	47	BIZSMTR31634	42	BIZVFC	48
BIZSAH1095B	47	BIZSMTR5321	42	BIZWFCZ14	44
BIZSAH12100B	47	BIZSMTR532112	42	BIZWFCZ18	44
BIZSAH12130B	47	BIZSMTR532114	42	BIZWFCZ316	44
BIZSAH1260B	47	BIZSMTR53212	42	BIZWFCZ532	44
BIZSAH1275B	47	BIZSMTR5322	42	BIZWPGN25	44
BIZSAH6535B	47	BIZSMTR53234	42	BIZWPGN30	44
BIZSAH6555B	47	BIZSPHV2100	73	BIZWPGN35	44
BIZSAH840B	47	BIZSPN620	40	BIZWPGN50	44
BIZSAH865B	47	BIZSPN620J	40	BIZWPRD25	44
BIZSAHB845B	48	BIZSPN630	40	BIZWPRD35	44
BIZSB04	36	BIZSPN630J	40	BIZWPWH25	44
BIZSB06	36	BIZSPN640	40		
BIZSB09	36	BIZSPN640J	40		
BIZSB12	36	BIZSPN650	40		
BIZSB15	36	BIZSPN650J	40		

BIZ 206 212	33	BIZ 218 079	34	BIZ 231 011	29
BIZ 206 216	33	BIZ 218 080	35	BIZ 231 012	29
BIZ 206 220	33	BIZ 218 081	35	BIZ 231 013	29
BIZ 206 225	33	BIZ 218 082	35	BIZ 231 015	29
BIZ 206 232	33	BIZ 218 083	35	BIZ 231 016	29
BIZ 206 240	33	BIZ 218 084	35	BIZ 231 017	29
BIZ 206 250	33	BIZ 218 086	35	BIZ 231 018	29
BIZ 206 263	33	BIZ 218 087	35	BIZ 231 021	30
BIZ 210 108	36	BIZ 218 088	35	BIZ 231 022	30
BIZ 210 115	36	BIZ 218 089	35	BIZ 231 023	30
BIZ 210 120	36	BIZ 218 090	34	BIZ 231 024	30
BIZ 210 125	36	BIZ 218 091	34	BIZ 231 025	30
BIZ 218 020	35	BIZ 218 093	34	BIZ 231 026	30
BIZ 218 021	35	BIZ 218 094	34	BIZ 231 027	30
BIZ 218 022	35	BIZ 218 095	34	BIZ 231 028	30
BIZ 218 023	35	BIZ 218 096	34	BIZ 231 029	30
BIZ 218 024	35	BIZ 218 097	34	BIZ 231 030	30
BIZ 218 025	35	BIZ 218 098	34	BIZ 231 031	30
BIZ 218 026	35	BIZ 218 099	34	BIZ 231 033	30
BIZ 218 040	34	BIZ 218 100	34	BIZ 231 034	30
BIZ 218 041	34	BIZ 218 101	34	BIZ 231 036	30
BIZ 218 042	34	BIZ 218 102	35	BIZ 231 037	30
BIZ 218 043	34	BIZ 218 103	35	BIZ 231 038	30
BIZ 218 044	34	BIZ 218 104	35	BIZ 231 039	30
BIZ 218 045	34	BIZ 218 105	35	BIZ 231 045	31
BIZ 218 046	34	BIZ 218 106	34	BIZ 231 046	31
BIZ 218 047	34	BIZ 220 001	36	BIZ 231 047	31
BIZ 218 048	34	BIZ 220 002	36	BIZ 231 048	31
BIZ 218 049	35	BIZ 220 003	36	BIZ 231 049	31
BIZ 218 050	35	BIZ 220 004	36	BIZ 231 056	31
BIZ 218 051	35	BIZ 220 005	36	BIZ 231 057	31
BIZ 218 052	34	BIZ 220 006	36	BIZ 231 058	31
BIZ 218 053	34	BIZ 220 007	36	BIZ 231 059	27
BIZ 218 054	34	BIZ 220 008	36	BIZ 231 060	27
BIZ 218 055	34	BIZ 225 023	33	BIZ 231 061	27
BIZ 218 056	35	BIZ 225 024	33	BIZ 290 001	17
BIZ 218 057	35	BIZ 225 033	54	BIZ 290 002	17
BIZ 218 058	35	BIZ 225 040	26	BIZ 290 003	17
BIZ 218 059	35	BIZ 225 041	26	BIZ 290 004	17
BIZ 218 060	35	BIZ 225 042	26	BIZ 290 005	17
BIZ 218 061	35	BIZ 225 043	26	BIZ 290 006	17
BIZ 218 062	35	BIZ 225 044	26	BIZ 290 007	17
BIZ 218 063	35	BIZ 225 045	26	BIZ 290 008	17
BIZ 218 064	35	BIZ 225 046	26	BIZ 290 018	16
BIZ 218 065	35	BIZ 225 047	26	BIZ 290 019	16
BIZ 218 066	35	BIZ 225 048	26	BIZ 290 021	15
BIZ 218 067	35	BIZ 225 049	26	BIZ 290 022	15
BIZ 218 068	34	BIZ 231 000	29	BIZ 290 026	15
BIZ 218 069	34	BIZ 231 001	29	BIZ 300 110	13
BIZ 218 070	34	BIZ 231 002	29	BIZ 300 111	13
BIZ 218 071	34	BIZ 231 003	29	BIZ 300 120	15
BIZ 218 072	34	BIZ 231 004	29	BIZ 300 121	15
BIZ 218 073	34	BIZ 231 005	29	BIZ 300 123	15
BIZ 218 074	34	BIZ 231 006	29	BIZ 300 512	21
BIZ 218 075	34	BIZ 231 007	29	BIZ 300 513	21
BIZ 218 076	34	BIZ 231 008	29	BIZ 300 515	21
BIZ 218 077	34	BIZ 231 009	29	BIZ 301 012	12
BIZ 218 078	34	BIZ 231 010	29	BIZ 301 038	12



BIZ 302 060	17	BIZ 351 090	59	BIZ 399 112	101
BIZ 302 061	17	BIZ 380 050	13	BIZ 399 113	101
BIZ 302 062	17	BIZ 380 051	13	BIZ 399 114	101
BIZ 302 063	17	BIZ 380 052	13	BIZ 399 115	101
BIZ 302 064	17	BIZ 380 053	13	BIZ 399 116	101
BIZ 303 002	12	BIZ 380 054	13	BIZ 399 118	101
BIZ 303 006	12	BIZ 380 055	13	BIZ 399 122	102
BIZ 303 012	12	BIZ 380 056	13	BIZ 399 123	102
BIZ 303 016	12	BIZ 380 060	13	BIZ 399 125	102
BIZ 303 019	16	BIZ 380 061	13	BIZ 399 127	102
BIZ 303 021	16	BIZ 380 062	13	BIZ 399 129	102
BIZ 303 038	12	BIZ 380 063	13	BIZ 399 130	102
BIZ 303 085	16	BIZ 380 064	13	BIZ 399 131	102
BIZ 304 048	15	BIZ 380 070	13	BIZ 399 132	102
BIZ 304 050	15	BIZ 380 071	13	BIZ 399 133	102
BIZ 304 051	15	BIZ 380 072	13	BIZ 399 134	102
BIZ 304 052	15	BIZ 380 073	13	BIZ 399 135	102
BIZ 304 053	15	BIZ 390 052	21	BIZ 399 136	102
BIZ 304 055	15	BIZ 390 053	21	BIZ 399 137	102
BIZ 310 135	48	BIZ 390 059	19	BIZ 399 139	102
BIZ 310 136	48	BIZ 390 061	19	BIZ 399 142	102
BIZ 310 137	48	BIZ 390 062	19	BIZ 399 157	101
BIZ 310 138	48	BIZ 390 063	19	BIZ 399 158	101
BIZ 310 261	17	BIZ 390 064	19	BIZ 399 159	101
BIZ 310 262	17	BIZ 390 065	19	BIZ 399 160	101
BIZ 310 263	17	BIZ 390 066	18	BIZ 399 175	103
BIZ 310 264	17	BIZ 390 067	18	BIZ 399 176	103
BIZ 310 270	18	BIZ 390 068	18	BIZ 399 177	103
BIZ 310 271	18	BIZ 390 069	18	BIZ 399 178	103
BIZ 310 273	18	BIZ 390 070	18	BIZ 399 179	103
BIZ 310 275	18	BIZ 390 071	18	BIZ 400 101	133
BIZ 310 277	18	BIZ 390 072	18	BIZ 400 102	133
BIZ 310 402	20	BIZ 390 073	18	BIZ 400 103	133
BIZ 310 403	20	BIZ 390 074	18	BIZ 400 170	63
BIZ 310 404	20	BIZ 390 470	119	BIZ 400 171	63
BIZ 310 411	19	BIZ 390 472	119	BIZ 400 172	63
BIZ 310 412	19	BIZ 390 473	119	BIZ 400 173	63
BIZ 310 413	19	BIZ 390 474	119	BIZ 400 174	63
BIZ 311 173	18	BIZ 390 475	119	BIZ 400 175	63
BIZ 311 175	18	BIZ 390 476	119	BIZ 400 176	63
BIZ 311 271	18	BIZ 390 478	119	BIZ 500 900	37
BIZ 320 001	20	BIZ 390 479	119	BIZ 500 901	37
BIZ 320 002	20	BIZ 390 483	54	BIZ 500 902	37
BIZ 320 003	20	BIZ 390 484	54	BIZ 500 903	37
BIZ 320 004	20	BIZ 390 490	56	BIZ 500 904	37
BIZ 320 005	20	BIZ 390 491	56	BIZ 500 905	37
BIZ 320 006	20	BIZ 390 492	56	BIZ 500 906	37
BIZ 320 007	20	BIZ 390 525	115	BIZ 620 260	118
BIZ 320 008	20	BIZ 390 527	115	BIZ 700 001	74
BIZ 320 009	20	BIZ 390 572	94	BIZ 700 003	76
BIZ 320 010	20	BIZ 390 574	94	BIZ 700 005	77
BIZ 351 021	55, 133	BIZ 399 100	101	BIZ 700 009	77
BIZ 351 040	56, 127	BIZ 399 102	101	BIZ 700 010	70
BIZ 351 051	55, 127	BIZ 399 106	101	BIZ 700 011	74
BIZ 351 061	57, 127	BIZ 399 107	101	BIZ 700 012	78
BIZ 351 065	57, 127	BIZ 399 108	101	BIZ 700 013	78
BIZ 351 071	57, 127	BIZ 399 109	101	BIZ 700 016	73
BIZ 351 075	57, 127	BIZ 399 110	101	BIZ 700 022	73

BIZ 700 031	89	BIZ 709 905	117	BIZ 730 153	125
BIZ 700 035	83	BIZ 709 906	117	BIZ 730 154	125
BIZ 700 036	83	BIZ 709 907	117	BIZ 730 500	128
BIZ 700 040	81	BIZ 709 908	117	BIZ 730 501	128
BIZ 700 043	76	BIZ 709 909	117	BIZ 730 502	128
BIZ 700 059	79	BIZ 709 911	116	BIZ 730 503	128
BIZ 700 063	80	BIZ 709 912	116	BIZ 730 504	128
BIZ 700 085	76	BIZ 709 913	116	BIZ 730 505	128
BIZ 700 095	103	BIZ 709 924	115	BIZ 730 506	128
BIZ 700 115	82	BIZ 709 925	115	BIZ 730 507	128
BIZ 700 130	114	BIZ 709 926	115	BIZ 730 508	128
BIZ 700 132	114	BIZ 709 928	115	BIZ 730 530	129
BIZ 700 136	114	BIZ 709 933	116	BIZ 730 531	128
BIZ 700 149	114	BIZ 709 934	116	BIZ 730 540	129
BIZ 700 175	83	BIZ 709 935	116	BIZ 730 541	129
BIZ 700 178	82	BIZ 709 940	116	BIZ 730 542	129
BIZ 700 183	79	BIZ 709 941	116	BIZ 730 543	129
BIZ 700 187	81	BIZ 709 943	116	BIZ 730 544	129
BIZ 700 188	81	BIZ 709 945	116	BIZ 730 545	129
BIZ 700 202	75	BIZ 709 948	115	BIZ 730 546	129
BIZ 700 206	89	BIZ 709 949	115	BIZ 730 550	128
BIZ 700 207	106	BIZ 709 950	115	BIZ 730 551	128
BIZ 700 212	84	BIZ 709 990	102	BIZ 730 552	128
BIZ 700 226	90	BIZ 709 991	102	BIZ 730 553	128
BIZ 700 229	93	BIZ 709 992	102	BIZ 730 554	128
BIZ 700 230	80	BIZ 710 000	24	BIZ 730 555	128
BIZ 700 233	109	BIZ 710 169	50	BIZ 730 556	128
BIZ 700 234	109	BIZ 710 214	64, 132	BIZ 730 557	128
BIZ 700 235	110	BIZ 710 293	25	BIZ 730 558	128
BIZ 700 238	112	BIZ 710 294	25	BIZ 730 560	128
BIZ 700 239	112	BIZ 710 295	22	BIZ 730 930	119
BIZ 700 240	111	BIZ 710 306	23	BIZ 730 931	119
BIZ 700 241	111	BIZ 710 320	64, 132	BIZ 740 129	118
BIZ 700 242	111	BIZ 710 350	50	BIZ 750 170	65
BIZ 700 243	112	BIZ 710 351	50	BIZ 750 171	65
BIZ 700 247	113	BIZ 710 352	50	BIZ 750 172	65
BIZ 700 248	113	BIZ 710 353	50	BIZ 750 173	65
BIZ 700 251	110	BIZ 710 406	49	BIZ 750 174	65
BIZ 700 273	78	BIZ 710 536	51	BIZ 760 000	110
BIZ 700 274	78	BIZ 710 537	51	BIZ 760 006	111
BIZ 700 275	106	BIZ 710 539	51	BIZ 760 011	110
BIZ 700 328	82	BIZ 710 560	62	BIZ 770 789	45
BIZ 700 335	88	BIZ 710 561	62	BIZ 770 790	45
BIZ 700 336	88	BIZ 711 300	63	BIZ 770 791	45
BIZ 700 386	88	BIZ 711 301	64	BIZ 770 792	45
BIZ 700 452	113	BIZ 711 302	64	BIZ 770 794	45
BIZ 700 460	84	BIZ 711 303	64	BIZ 770 795	45
BIZ 700 524	82	BIZ 720 150	45	BIZ 770 796	45
BIZ 700 598	79	BIZ 720 151	45	BIZ 770 797	45
BIZ 700 651	101	BIZ 720 152	45	BIZ 770 798	45
BIZ 700 653	101	BIZ 720 153	45	BIZ 770 800	44
BIZ 700 655	101	BIZ 720 154	45	BIZ 770 801	44
BIZ 700 656	101	BIZ 730 143	123	BIZ 770 803	47
BIZ 700 658	101	BIZ 730 144	123	BIZ 770 804	47
BIZ 700 896	103	BIZ 730 149	126	BIZ 770 805	47
BIZ 700 897	103	BIZ 730 150	126	BIZ 770 806	47
BIZ 709 903	117	BIZ 730 151	124	BIZ 770 807	47
BIZ 709 904	117	BIZ 730 152	124	BIZ 770 808	47



BIZ 770 809	47	BIZ 770 872	40	BIZ 780 087	101
BIZ 770 810	47	BIZ 770 873	40	BIZ 780 089	101
BIZ 770 811	47	BIZ 770 874	40	BIZ 780 204	86
BIZ 770 812	47	BIZ 770 875	40	BIZ 780 205	87
BIZ 770 813	47	BIZ 770 876	40	BIZ 780 207	46
BIZ 770 814	47	BIZ 770 877	40	BIZ 780 208	46
BIZ 770 816	48	BIZ 770 878	40	BIZ 780 209	46
BIZ 770 818	48	BIZ 770 879	40	BIZ 780 218	50
BIZ 770 820	41	BIZ 770 880	40	BIZ 780 219	50
BIZ 770 821	41	BIZ 770 881	40	BIZ 780 399	86
BIZ 770 822	41	BIZ 770 882	40	BIZ 780 428	86
BIZ 770 823	41	BIZ 770 883	40	BIZ 780 852	87
BIZ 770 824	41	BIZ 770 884	40	BIZ 780 853	87
BIZ 770 825	41	BIZ 770 885	40	BIZ 790 009	75
BIZ 770 826	41	BIZ 770 886	40	BIZ 790 010	70
BIZ 770 827	41	BIZ 770 887	40	BIZ 790 011	77
BIZ 770 828	41	BIZ 770 888	40	BIZ 790 017	76
BIZ 770 829	41	BIZ 770 889	40	BIZ 790 019	75
BIZ 770 830	41	BIZ 770 891	43	BIZ 790 029	69
BIZ 770 831	41	BIZ 770 892	43	BIZ 790 037	83
BIZ 770 832	41	BIZ 770 893	43	BIZ 790 038	83
BIZ 770 833	41	BIZ 770 895	44	BIZ 790 062	89
BIZ 770 834	41	BIZ 770 896	44	BIZ 790 070	73
BIZ 770 835	41	BIZ 770 897	44	BIZ 790 071	73
BIZ 770 836	41	BIZ 770 898	44	BIZ 790 072	73
BIZ 770 837	41	BIZ 770 900	44	BIZ 790 073	73
BIZ 770 838	41	BIZ 770 901	44	BIZ 790 074	73
BIZ 770 839	41	BIZ 770 902	44	BIZ 790 075	73
BIZ 770 840	41	BIZ 770 903	44	BIZ 790 076	73
BIZ 770 842	41	BIZ 770 904	44	BIZ 790 080	73
BIZ 770 843	41	BIZ 770 905	44	BIZ 790 082	74
BIZ 770 844	41	BIZ 770 906	44	BIZ 790 083	73
BIZ 770 845	41	BIZ 770 908	47	BIZ 790 088	73
BIZ 770 846	41	BIZ 770 909	47	BIZ 790 089	73
BIZ 770 847	41	BIZ 770 910	47	BIZ 790 194	80
BIZ 770 849	42	BIZ 770 911	47	BIZ 790 200	70
BIZ 770 850	42	BIZ 770 919	43	BIZ 790 202	79
BIZ 770 851	42	BIZ 770 921	43	BIZ 790 211	80
BIZ 770 852	42	BIZ 770 922	43	BIZ 790 212	84
BIZ 770 853	42	BIZ 770 923	43	BIZ 790 214	84
BIZ 770 854	42	BIZ 770 924	43	BIZ 790 215	84
BIZ 770 856	42	BIZ 770 925	43	BIZ 790 231	69
BIZ 770 857	42	BIZ 770 927	51	BIZ 790 234	69
BIZ 770 858	42	BIZ 770 928	51	BIZ 790 278	27
BIZ 770 859	42	BIZ 770 929	51	BIZ 790 279	32
BIZ 770 860	42	BIZ 770 930	51	BIZ 790 280	27
BIZ 770 861	42	BIZ 770 932	47	BIZ 790 281	27
BIZ 770 862	42	BIZ 770 933	47	BIZ 790 282	32
BIZ 770 863	42	BIZ 770 935	51	BIZ 790 283	32
BIZ 770 864	42	BIZ 770 936	51	BIZ 790 503	97
BIZ 770 865	42	BIZ 770 937	51	BIZ 790 519	91
BIZ 770 866	42	BIZ 770 938	51	BIZ 790 529	95
BIZ 770 867	42	BIZ 780 032	46	BIZ 790 530	95
BIZ 770 868	42	BIZ 780 033	46	BIZ 790 531	96
BIZ 770 870	40	BIZ 780 071	101	BIZ 790 532	96
BIZ 770 871	40	BIZ 780 080	101	BIZ 790 601	100

**A**

ACCESSORIES FOR CABLE RODS	114
ADHESIVE TAPES	55 - 127
ALUMINIUM ROLLER,	112

B

BALL-POINT HEX KEY CLIP SET	80
BARB LOCKING PA 6.6 CABLE TIES	15
BENDING SPRINGS	133
BIZ' BUCKET	118
BIZ'GEL EXPRESS SEALING GEL	24
BIZ'GEL SEALING GEL	22-23
BLADES FOR UTILITY KNIFE BIZ 700 187	81
BOOT LACES PIN	26

C

CABLE BLACK MARKER	86
CABLE CLAMPS	17
CABLE CLIPS	17
CABLE CUTTER	74
CABLE GLANDS	33
CABLE GRIPS	114
CABLE RODS	114
CABLE SHEARS "CROCO"	82
CABLE STRIPPERS	75-76
CABLE TIES	12-15, 70
CABLE WHITE MARKER	86
CATENARY WIRES	51
CAULKING GUN	64 - 132
CERAMIC TILE DRILL BITS	102
CHAIN SINGLE LOOP	50
CLAMP PLIERS	70
CLEAR PRIMING FLUID	64
CRIMPING PLIERS	32, 78
CRIMPING TOOL FOR BOOT LACES	27

D

DISPENSER REEL HEIGHT 98 CM FOR PULL-WIRE 102 M	111
DOUBLE GRIP TAPE 2 M	59
DOUBLE SIDED FOAM TAPE	56
DRILL BITS	102-103
DRILL SET	102
DRUM ROLLER STAND	106
DRYWALL SCREWS BUGLE HEAD PHILLIPS® DRIVE	41
DUCT TAPES	54

E

ELECTRICAL BRACKETS	37
ELECTRICIAN WOVEN BAG	90
ELECTRICIAN'S MAGNETIC POCKET LEVEL 7 CM	88
ELECTRICIAN'S KNIFE	82
EXTENSION LEADS	115-116

F

FIBERGLASS CABLE ROD KIT	114
FLANGED WALL PLUGS	45
FLAT CABLE CLIPS	18
FLEXIBLE GUIDE HEADS	112-113
FOLDABLE CONTROL CABINET KEY	80
FOLDING CUTTER	82
FOLDING DRUM ROLLER	106

G

GAS HOT AIR GUN	100
GAS SOLDERING IRON	84
GRIP TERMINALS	32
GUN FOR CARTRIDGES AND INTUMESCENT FOAM	64 - 132

H

HACKSAW	83
HAMMER DRILL BITS	101
HANDLING GLOVES	124-126



H

HEAT-SHRINK TUBING WITHOUT ADHESIVE	34
HEX NUTS	44
HEXAGONAL KEYS	80
HOLLOW WALL ANCHORS	47

I

I-SLIM SCREWDRIVERS	74
---------------------	----

L

LED POCKET INSPECTION LIGHT	118
LEVEL 23 CM	88
LEVER PUSH-IN WIRE CONNECTORS	21
LOG BOOKS	129
LONG NOSE PLIERS	69

M

MACHINE SCREWS PAN HEAD COMBINATION	42
MAGNETIC LEVELS	88-89
MAINTENANCE TOOL BOX	95
MARKING PAINT	65
MARKING PEN	87
MASONRY DRILL BITS	101
MASTER ROLL TOOL CASE	97
MEDIUM WALL 3/1 HEAT-SHRINK TUBING WITH ADHESIVE	35
METAL CLOUDS	43
METAL SADDLES	18-20
MONOFILAMENT PULL-WIRE WITHOUT BIZKART CASING	110
MOVABLE BUSHINGS	16

N

NEEDLE POINT SCREWS PAN HEAD PHILLIPS® DRIVE	40
NON INSULATED TERMINALS	27
NYLON ANCHORS	45, 47

O

ORGANIZER 100 MM DEPTH	96
------------------------	----

P

PADSAW FOR DRYWALLS	83
PICA DRY GRAPHITE LEAD PENCIL	84
PICA INK BLACK MARKER DEEP HOLES	86
PLASTIC WALL PLUGS	44
PLUG AND CORDS	117
PLUG RATCHET INSERTION TOOL	70
POUCH ELECTRICIAN	94
POWER BOARDS	115
PRE-INSULATED TERMINALS AND SLEEVES, WIRE CROSS-SECTION	29-31
PULLING EYE	111
PULL-WIRES	109-110
PVC JOINTING CEMENT	63
PVC JOINTING GLUE	63
PVC PIPE SHEARS	83

R

RATCHET CABLE CUTTERS	74, 75
RATCHET SPANNER	79
REEL OF WIRE	50
REINFORCED DIAGONAL CUTTING PLIERS	69
REPAIR KIT FOR STEEL/NYLON 10 MM Ø PULL-WIRES	113
REVERSIBLE RATCHETS	79
RIGID HEAD WITH PULLING EYE	111-112
ROOF FLASHING	33
ROOFING BOLTS AND HEX NUTS TRUSS HEAD ZINC PLATED STEEL	43

S

SAFETY LOCKOUT TAGS	129
SAW BLADES	83
SCREW CONNECTORS	21
SCREWDRIVERS	73
SDS+ HAMMER DRILL BITS "XTREME"	101
SELF DRILLING SCREWS	41, 43
SELF-DRILLING PLASTERS	46

**S**

SELF-GRIPPING CABLE TIES	13
SHAFTS FOR BI-METAL HOLE SAWS STANDARD	103
SHARP POINT WASHER HEAD SCREWS PHILLIPS® DRIVE	42
SITE MARKING TAPE	56 - 127
SLEEVE ANCHORS	47-48
SLIDE WHEEL M12 Ø 30 MM	113
SLIP GROOVE-JOINT PLIERS	69
SNAP BUSHINGS	17
SPADE BITS	103
SPARE BLADES	75-76, 83
SPARE LEADS	84, 87
SPARE MATRICES	78
SPARE TIP	84
SPIRAL BINDINGS	36
SPRING SADDLES	48
SPRING TOGGLES ROUND HEAD	51
SQUALE CONNECTION KITS	25
SQUALE MINI	25
SQUARE TERMINAL CRIMPING PLIERS	77
STACKABLE ORGANIZER	96
STRAPS WITH TIGHTENING BUCKLE	119
STRIPPING PLIERS	76
SUSPENSION LOCKS WITH INTEGRATED UNLOCKING SYSTEM	49

T

TAPE MEASURES	89
TECHNICIAN TOOL BAG	94
TERMINAL BLOCKS	20

T

TERMINALS AND CABLE ENDS CRIMPING PLIERS	77
TEST TAGS	128-129
TIE WIRES	50
TOOL BAGS	93
TOOL BOX	95
TOOL FOR HEAT SHRINKABLE ERMINALS	32
TOOLS BACPACK	91
TRAPEZOIDAL BLADES FOR UTILITY KNIVES BIZ 700 040 AND BIZ 700 328	82
TURNBUCKLES HOOK AND EYE	51

U

UNIVERSAL KEY	80
UTILITY KNIFE	81

V

VENTILATION TAPE	55 - 153
VERTICAL FLANGE CLIPS	48
VINYL TAPE	54
VOLTAGE TESTERS	89

W

WALL PLUG MOUNTING BASES	16
WARNING TAPES	57 - 127
WASHERS	44
WAX CRAYON PICA VISOR PERMANENT	87
WEDGE ANCHORS	46
WHITE ROOF AND GUTTER SILICONE	62
WRENCHES	79



SUSPENSION LOCKS

with integrated unlocking system

New technology to facilitate insertion and unlocking for 1.5 mm and 2.5 mm



Easy and quick adjustment without specific tool!

Applications

The BizLine lock allows suspending or securing fastening of cable trays, light fixtures, ventilation ducts, pre-wired electrical distribution ducts, centre points, signs, etc.

BIZ Reference	Statut
BIZ710406*	100

* Available individually or in boxes of 100.

Benefits

- ✓ Reduced installation time: up to 6 times faster than a typical suspension system.
- ✓ Easy and quick adjustment without specific tool!
- ✓ New streamlined, discrete and light design.
- ✓ Versatile: suitable for 1.5 mm Ø and 2.5 mm Ø cables.
- ✓ Certified.

To use with locking devices BIZ710406

REEL OF WIRE

Applications

Create wire loops for static light-duty suspensions.

Technical details

Woven steel wire. Strand core: 7 x 7 steel brands.


BIZ Reference	Cable (mm)	Length (m)
BIZ710350	1.5	50
BIZ710351	1.5	150
BIZ710352	2.5	50
BIZ710353	2.5	150

Load accepted (cable Ø 1.5 mm): 35 kg.
Load accepted (cable Ø 2.5 mm): 70 kg.
Load given for application with BizLine suspension locks.



COMING SOON...

LED ATTACK



NEW

