


# Cable tray ceiling suspension with hooks $\varnothing$ 2 x 300 mm (x 10)

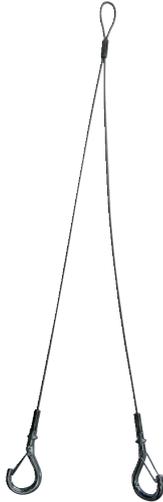

## Characteristics

**Cable  $\varnothing$  (mm) :** 2  
**Number of strands :** 2  
**Length of strands (mm) :** 300  
**Load accepted (kg) :** 45  
**Quantity per box :** 10

## Benefits

- Half the amount of drilling.
- Single anchor point with no adjustment.
- Carabinas: rapid removal for maintenance.
- Easy cable pulling.
- Compatibles with certain perforated sheeting cable routes.

## GENERAL INFORMATION

### Description

Complete adjustable suspension system provided with an attachment point at each end.

### Technical details

Cable: galvanised steel.  
 Hardware: aluminium.

### Advices

Follow the minimum and maximum operating loads.  
 Check that the cable has no traces of oil, paint or rust.  
 Do not use outdoors or in a chlorinated, marine or corrosive environment.  
 Do not use for lifting.  
 Use only for the suspension of equipment under static load.  
 Do not use for suspension at more than 60° from the vertical.

### Application(s)

For suspension of all types of cable trays (wire and marine cable).  
 Compatible with suspension locks BIZ 710 405, BIZ 710 406 and BIZ 710 408.  
 Compatible with cables BIZ 710 350, BIZ 710 351, BIZ 710 352 and BIZ 710 353.

## LOGISTIC INFORMATION

### Packaging



#### Plastic box

**Height (cm) :** 6  
**Length (cm) :** 20,5  
**Depth (cm) :** 8,9  
**Net weight (kg) :** 0,634  
**Gross weight (kg) :** 0,634



### Outer package 1



#### Carton box

**Height (cm) :** 14  
**Length (cm) :** 42  
**Depth (cm) :** 28  
**Net weight (kg) :** 7,608  
**Gross weight (kg) :** 8,28

x 12.00



### Outer package 2



#### Pallet

**Height (cm) :** 120  
**Length (cm) :** 80  
**Depth (cm) :** 110  
**Net weight (kg) :** 228,24  
**Gross weight (kg) :** 264



x 360.00